

SPECIFICATION SHEET

PRODUCT SKU: EL-395B-AB

•Brick Light

• Cast Brass

Fixture Specifications:

Housing: Heavy Duty Corrosion Resistant Cast Brass.

Faceplate: Diecast brass faceplate with frosted lens, fitted to stainless steel backplate.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.

Lighting Source: Integrated LED, 24 single cores, 5 Watt, 450 Lumen. 3000 kelvin. Operating Voltage: 8 - 15 volt AC , 35W Halogen equivalent, rated hours: 30,000. Ambient Temperature: -40°F to 124°F . CRI: Ra > 80


Wiring: Fixture is pre-wired with a 25 ft SPT2-W direct burial cord, pre-stripped for easy connection, wire connector available separately. Universal connector or gel-filled wire nut are available.

Mounting: Surface mount slim stainless steel backplate with integrated LED module. Best used on concrete, brick, or other masonry surfaces. Two screws and two anchor bolts are provided.

Electrical Notes: A remote 12V magnetic transformer is required, can be ordered from Corona Lighting, seperately. Not for use with electronic transformer. Increasing voltage above 12 volts AC may decrease life of LED cores.


Dimensions: 8³/₄"(Width) x 2¹/₂"(Height) x 1/2"(Depth)

Warranty: Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

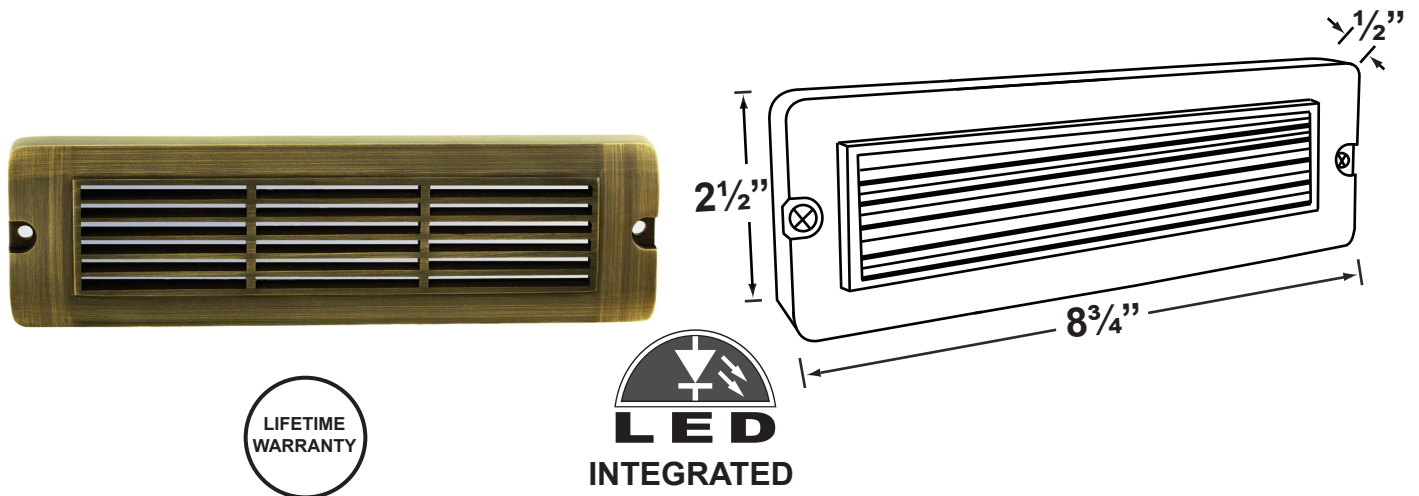

Template of backplate

NO BACKBOX REQUIRED

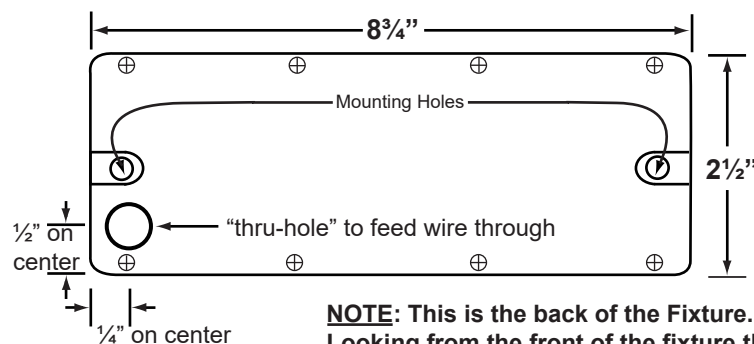

NOTE: This is the back of the Fixture. Looking from the front of the fixture the positions of through-hole and other details are reversed.