

SPECIFICATION SHEET

JOB NAME:

LOCATION:

QUOTE/REF#:



DESCRIPTION

The best choice for simple recessed lighting applications. It comes with the frosted polycarbonate module lens diffuses light evenly throughout while reducing glare with LED technology.


Instant On to Full Brightness technology. No LED pixelation. The 120V AC LED Module is compatible with Step 1 Dezigns 3 in or 4 in housings and trims as a retrofit option.

SPECIFICATIONS

- Brightness:** 750 or 950 Lumen
- Power (Watts):** 10 Watt
- Voltage:** 120V AC
- LED CCT:** 2700K, 3000K, 3500K, 4000K, or Sunset Options
- CRI:** 90+
- Dimmable:** Triac/ELV
- Environment:** Wet or Dry Location
- Aperture:** 2 in diameter 50.8 mm
- Dimensions:** 2.125 in. OD x 2.875 in. H
- Finish:** Black
- Manufacturer:** Elumalight
- Rating:** JA8 Title 24, UL, and Energy Star Listed
- Avg. Lifetime:** ± 30,000 - 50,000 hours

KEY FEATURES

- Integrated 120V Dimmable Driver Triac/ELV
- Excellent color rendering 95+ CRI
- Sunset Module starts from 3000K and dims to 1800K
- Works in 3 and 4 in housings with Koto twist-&-lock trims
- Standard 38° Lens installed, 25° and 60° lens included with each module - Optional Lens 18° (EL-EP731C), Sold Separately
- Optional Louver (EL-L45), Linear Lens (EL-L46), Spread Lens (EL-L47), Clear Lens (EL-L48), Sold Separately
- Energy Star, cULus Listed
- Meets Energy Star & Title 24 JA8 2016 standards
- Frosted polycarbonate module lens diffuses light evenly throughout while reducing glare with LED technology.
- Integrated driver and light engine with quick connect Diecast aluminum body with heat fins allow for efficient cooling.
- Twist-lock design for toolless trim installation, for use with Koto™ trims only. Can be use in 3" and 4" housings with quick connect base.

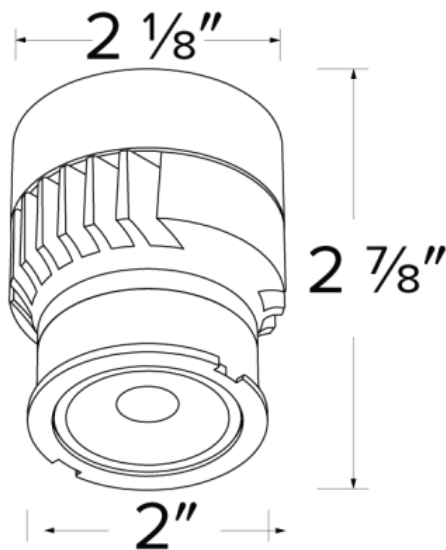

APPLICATIONS

- LED Bathroom Lighting
- Residential Ceiling Down Lighting
- Commercial Ceiling Down Lighting
- Living Room Lighting
- Office Lighting
- Home Theater LED Lights
- LED Kitchen Lighting

