

SPECIFICATION SHEET

JOB NAME:

LOCATION:

QUOTE/REF#:



DESCRIPTION

Step 1 Designs selection of LED Dimmable Constant Voltage Magnetic Drivers have the highest accuracy rating in the industry, delivering accurate dimming power. The 12V DC Drivers are generally used when you need stable voltage to your LED lights.

The primary manually reset circuit breaker is standard on the LED Class 2 Magnetic Dimmable Drivers. Two section bobbin provides complete insulation between the primary and secondary sides. Encapsulated with polyester resin for whisper-quiet operation. Small dimensions and weight saves space and lowers an installation cost. The outdoor enclosure rated NEMA 3R or IP24.

SPECIFICATIONS

Input Voltage:	120V AC 60 Hz
Current:	2A max input current at full load
Output Voltage:	12V DC
Output Current:	16.6A
Power:	200 Watt
Dimmable:	Yes, 100% - 0% dimming
Efficiency:	85%
Operating:	105°C
Power Method:	Hardwire
Input Leads:	18AWG 600V
Output Leads:	12AWG 300V
Dimensions:	8 in. L x 4.15 in. W x 3.41 in. H
Housing:	The actual transformer 200W is encapsulated in the enclosure
Housing Finish:	The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring:	Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors
Environment:	Dry or Damp Location
IP Rating:	IP24
Rating:	Conforms to UL STD. 2108 Certified to CSA ETL Listed
Manufacturer:	Elumalight
Warranty:	5 Year Limited

KEY FEATURES

- Class II rated magnetic LED drivers
- Dimmable with compatible MLV, ELV, CL dimmers
- Over Load Protection
- Over Temperature Protection
- Short Circuit Protection
- Thermal manually reset primary breaker 3A
- Magnetic manually reset secondary breaker 25A
- Easy installation
- Maintenance-free
- Solid-state construction
- High vibration and shock resistance
- No RF interference
- UL Listed, CUL Listed, RoHS, CE
- Long lifespan


APPLICATIONS

- For use with compatible Dimmers and Constant Voltage 12V DC LED lights



SPECIFICATION SHEET

Dimensions (Unit: in.)

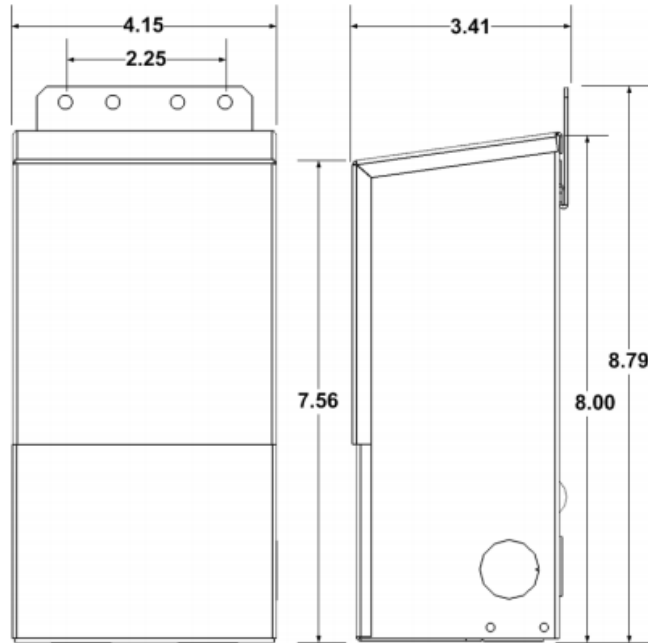

Wiring Diagram

