

**SPECIFICATION SHEET**

JOB NAME:

LOCATION:

QUOTE/REF#:



**SPECIFICATIONS**

**Wattage:** 96 watts  
**Input Voltage:** 120V AC  
**Frequency:** 50/60Hz  
**Input Current:** 1A max  
**Output Voltage:** 25.5V DC  
**Output Current:** 4A  
**Efficiency:** 89%  
**Dimmable:** Yes  
**Input Leads:** Black L, White N, (18AWG 600V)  
**Output Leads:** Red +, Blue -, (18AWG 300V)  
**Weight:** 0.4 lbs  
**Power Method:** Hardwire  
**Dimensions:** 3.34 in. L x 1.77 in. W x 1.02 H  
 85 mm L x 45 mm W x 26 mm H

**DESCRIPTION**


The EL-MC9624-P is ultra compact low profile. This Constant Voltage Dimmable LED Hardwire Driver is compatible with MLV, ELV, CL dimmers for Forward and Reverse Phase dimmers. Built-in overload and short circuit protection for safe load regulation. It fits in 4 inch junction box. UL and Class II certified.

**KEY FEATURES**

- Fully Electronic
- Wide variety of compatible dimmers, flicker free dimming
- Over load, Short circuit protection
- Whisper quiet
- Highest efficiency
- Excellent Line and Load regulation
- UL listed when mounted in UL listed junction box.
- Triac (Phase) Dimmable Electronic LED Driver for Forward and Reverse Phase Dimmers
- Enclosure Temperature does not exceed 90°C at 45°C ambient and fully loaded

**APPLICATIONS**

- Suitable for 24V DC LED light fixtures

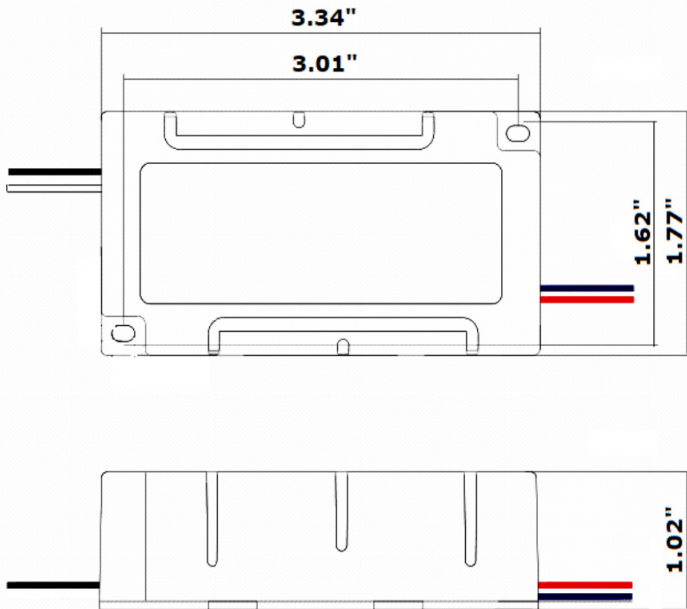

**WIRING DIAGRAM**

