

SPECIFICATION SHEET

JOB NAME:

LOCATION:

QUOTE/REF#:



SPECIFICATIONS

- Input Volt.:** 100-240V AC
- Output Volt.:** 3-18V DC
- Current:** 350mA
- Power:** 1-6 Watts
- Dimmable:** No
- Oper. Temp.:** -20°C ~ +50°C
- Over Load Protection:** Yes
- Over Temperature Protection:** Yes
- Short Circuit Protection:** Yes
- Power Method:** Hardwire
- Dimensions:** 5.71 in. L x 0.82 in. W x 0.75 in. H
145 mm L x 21 mm W x 19 mm H
- Finish:** White Polycarbonate
- Environment:** Dry Location
- IP Rating:** IP20
- Rating:** UL Listed, CUL Listed, RoHS, CE
- Manufacturer:** Elumalight
- Warranty:** 1 Year Limited

DESCRIPTION

350MA LED Constant current drivers are generally used when you need stable current to your LED lights. It has built-in overload, short circuit, and overheat protection.


Need help with your LED lighting applications? Our lighting experts are here to help! Contact us today for assistance with lighting plan or installation instructions.

KEY FEATURES

- Easy installation
- Maintenance-free
- Solid-state construction
- High vibration and shock resistance
- Overload, short circuit, and overheat protection
- No RF interference
- UL Listed, CUL Listed, RoHS, CE
- Long lifespan

APPLICATIONS

- For use with compatible Constant Current 350mA LED lights. Not for use with dimmers.

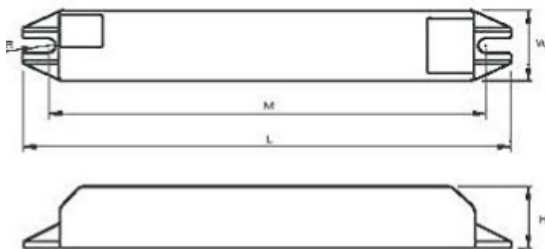

L : 145.5 mm H : 19 mm
M : 130.3 mm K :
N : R : 2.2 mm
W : 21 mm Slot On One Side Allowing Alignment : M+/-3 mm
Tolerance : ≥0 ~ 100 ≥ +/-0.5mm
 100 ≥ +/-1 mm

Terminal Block : Push Button and Quick Connect
Housing Material : Polycarbonate
Soldering : Lead-Free, Comply With RoHS
Label : Surface Print

