


SPECIFICATION SHEET

JOB NAME:

LOCATION:

QUOTE/REF#:

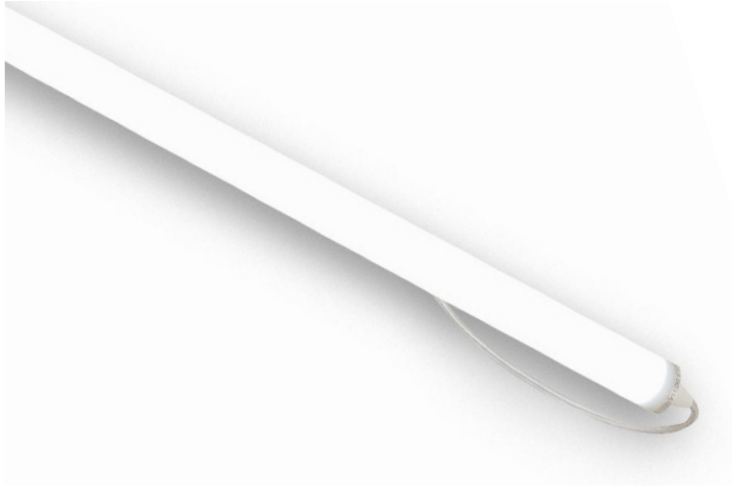

SPECIFICATIONS

| | |
|-----------------------|---|
| Brightness: | 600 Lumens/ft |
| Input Voltage: | 12V DC |
| LED CCT: | 6000K |
| CRI: | 90+ |
| IP Rating: | IP20 |
| Environment: | Indoor Use - Dry Location |
| Beam Angle: | 360° |
| Tube Diameter: | 1.5 in / 38.1 mm wide |
| Finish: | White Diffuser Tube |
| Mounting: | Each LED Saber Tube includes 2 pcs surface mounting clips |
| Manufacturer: | Elumalight |
| Lifespan: | ± 30,000 - 50,000 hours |
| Rating: | UL, ETL, RoHS |

* **Required:** Requires 12V DC Dimmable or Non-Dimmable LED Power Supply. Sold Separately.

| Length | Watts | Lumens |
|--------|-------|--------|
| 48" | 22 | 2400 |
| 64" | 32 | 3200 |
| 70" | 36 | 3600 |

DESCRIPTION

The 12V DC LED Saber Tube Light is an energy-efficient and cost-effective lighting solution for the exhibit, display, and decorative linear lighting environments. The new EL series saber style LED light bars are low heat in comparison to halogen light fixtures. The LED Saber Tube Lights 12V are engineered for fast and easy installation and it can be easily mounted with two included mounting clips. Available in 6000K CCT with 48, 64, or 70 in. length options.

KEY FEATURES

- Superior Color Rendering Index (CRI)
- Architectural Grade Lighting
- Low heat, no hotspots, and even illumination
- Integrated LED Chipsets are high intensity, ultra-bright, and energy-efficient
- Up to 50,000 hours Lifespan

APPLICATIONS

- Lighting for Tradeshows, Exhibition, Retail Displays
- Office, Ceiling, Storage Areas, Fabrication Floors, and Garages
- Downlight and Overhead Lighting Applications
- Decorative Lighting Applications

