

**SPECIFICATION SHEET**

**JOB NAME:**

**LOCATION:**

**QUOTE/REF#:**



**DESCRIPTION**

Step 1 Dezigns LED Step Light Modules are energy efficient and provide maintenance-free illumination with a long lifespan. They are IP65 rated suitable for indoor or outdoor environments. Each LED Step Light comes with a 2 in. x 4 in. gasket for exterior applications.

It is a recessed LED light fixture that is an excellent retrofit for the staircase, stairway, and pathway lighting. The small size makes it versatile enough for infinite applications.

Each step light is selected with your choice of LED Step Light Faceplates (sold separately) with various styles and finishes to complete the lighting installation.

The LED Step Light Modules are made with high impact, weather-resistant polycarbonate casing. Its compact size with universal driver for easy installation and wiring into USA standard 2 in. x 4 in. junction boxes using mounting screws provided. No rough-in box required to install the LED Step Lights.

**KEY FEATURES**

- Low profile design, flush to wall aesthetics
- Energy-efficient LED chipsets
- Rated IP65 for indoor or Outdoor applications
- Easy to install and wire to USA standard 2x4 junction boxes
- Connect sets of LED step lights to a branch circuit and use a wall switch for On/Off control
- The LED Step Light Module is only compatible with Step 1 Dezigns Faceplates
- C/US UL Listed

**APPLICATIONS**


- Walls
- Staircase
- Stairways
- Pathways

**ORDER SKUS**

Product SKU	Dimming	Input Voltage
EL-STP-32K-12V	Dimmable	12V DC
EL-STP-32K-120	Dimmable	120V AC
EL-STP-32K-UNVD	Non-Dimmable	120-277V AC

**SPECIFICATIONS**

- Brightness:** 37 Lumens  
**Power:** 1.5 watts  
**Input Voltage:** 120V, 120-277V AC, or 12V DC  
**LED CCT:** 3000K Warm White  
**CRI:** 80+  
**Dimmable:** Yes, except non-dimmable modules  
**Environment:** IP65 - Wet Locations  
**Beam Angles:** 110°  
**Dimensions:** 4.75 in L x 2.31 in W x 0.375 in D  
**Mounting:** LED Step Light can be recess mounted to 2" x 4" standard junction box using mounting screws provided.  
**Finish:** White  
**Manufacturer:** Elumalight  
**Rating:** UL Listed  
**Avg. Lifetime:** ± 30,000 - 50,000 hours  
**Warranty:** 5 Year Limited

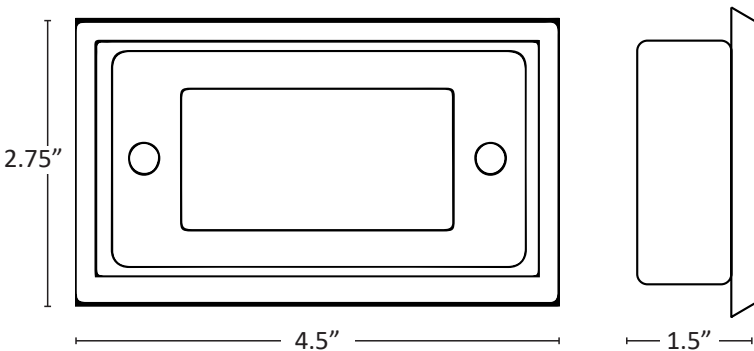

**Standard Style Faceplate Options**



**SSM**  
Smooth Lens



**SVL**  
Vertical Louver



**SVS**  
Vertical Scoop



**SHL**  
Horizontal Louver



**SHS**  
Horizontal Scoop



**FPF**  
Faceplate Frame

**Designer Style Faceplate Options**



**DVW**  
Vertical Wave



**DVL**  
Vertical Louver



**DHW**  
Horizontal Wave



**DHL**  
Horizontal Louver

**ORDERING GUIDE:**

Example: EL-STP-SSM-WH

SERIES	FACEPLATE TYPE	FINISH
EL-STP	See Above Options to Select Standard or Designer Style Faceplates	<b>WH</b> - White <b>DB</b> - Bronze <b>SS</b> - Stainless