

SPECIFICATION SHEET



JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____

SPECIFICATIONS

- Brightness:** 400 Lumens per ft.
- Input Voltage:** 120V AC
- Power:** 5 watts per ft
- LED CCT:** 4000K or 3000K
- CRI:** 90+
- IP Rating:** IP20
- Environment:** Indoor Use - Dry Location
- Beam Angle:** 120°
- Lengths:** 12, 22.75, 39.5, or 47 in options
- Width:** 0.86 in / 21.84 mm wide
- Height:** 1.38 in / 35.05 mm thick
- Mounting:** Surface Metal Mounting Clips
- Included:** 2 x Spring Steel Clips
2 x Mounting Screw
1 x End Connector
1 x Spliced Wire Power Feed
- Manufacturer:** Elumalight
- Lifespan:** ± 30,000 - 50,000 hours
- Rating:** UL, ETL, RoHS

Length	Watts	Lumens
12"	5	400
22.75"	10	700
39.5"	14	1100
47"	18	1400

DESCRIPTION


The Micro T5 LED Light Bar is an ideal lighting solution for multiple applications such as coves and soffits, displays and bookshelves, undercabinet, and step lighting. For applications that require low maintenance, low energy consumption, and low operating temperatures, with its high lumen output and long life, these LED fixtures are the answer.

KEY FEATURES

- Integrated LED driver built-in
- Easy plug & play installation
- Solid-State Construction
- High shock and Vibration Resistance
- LED Chipsets are high intensity, ultra-bright, and energy-efficient
- Up to 50,000 hours Lifespan
- UL, ETL Listed, Energy Star

APPLICATIONS

- Tradeshows, Exhibition, Retail Displays
- Downlighting or Uplighting Applications
- Backlighting or Edge-Lighting
- Under-cabinet, Under-Counter, or Under-Shelf Lighting

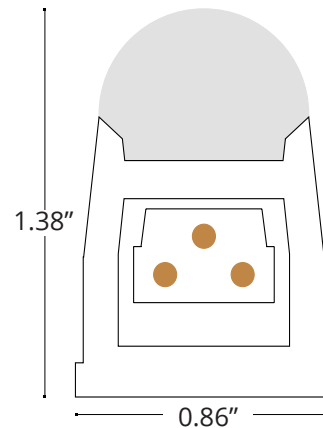


SOLD SEPARATELY



MICRO T5D LED WIRING JUNCTION BOX

EL-T5D-PWB WHITE

Use for dimming T5 LED Linear Light fixtures

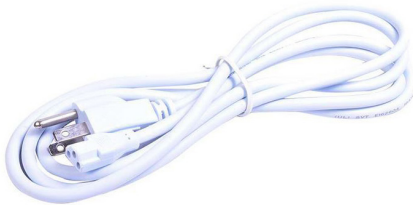

MICRO T5 PLUG-N-PLAY POWER FEED

EL-T5D-PF-6 6 FT POWER FEED

EL-T5D-PF-12 12 FT POWER FEED

Directly plug into LED Micro T5 female connector port



MICRO T5 MALE-FEMALE JUMPER POWER FEED

EL-T5D-JMP-6 6 in. JUMPER

EL-T5D-JMP-12 12 in. JUMPER

EL-T5D-JMP-24 24 in. JUMPER

EL-T5D-JMP-36 36 in. JUMPER

EL-T5D-JMP-48 48 in. JUMPER

EL-T5D-JMP-72 72 in. JUMPER

Use for powering one LED T5 linear light to the next
