

LED TECHNOLOGY

50,000 Hours Life, 15 Watt, 120VAC 60Hz

Applications:

Entry Way, Patio Light, Porch Light, Wall Light

Features:

- Adjustable Lamp color Switch to: 3000K, 4000K, 5000K
- Integrated 12 Watt LED
- Rugged Corrosion Resistant Cast Aluminum Housing
- Tempered Glass Lens
- Fixture Can be Mounted to Shoot Light Up or Down
- Matte Black Color
- Outdoor Wet Location

ADJUSTABLE
LIGHT COLOR

3000K
WARM WHITE

4000K
COOL WHITE




5000K
DAY LIGHT



Black

Specification:

Input Line Voltage:	120VAC
Input Power	12W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
CCT	3000K/4000K/5000K
CRI	≥80
Lumens	1200
Beam Angle	45°
CBCP	2977

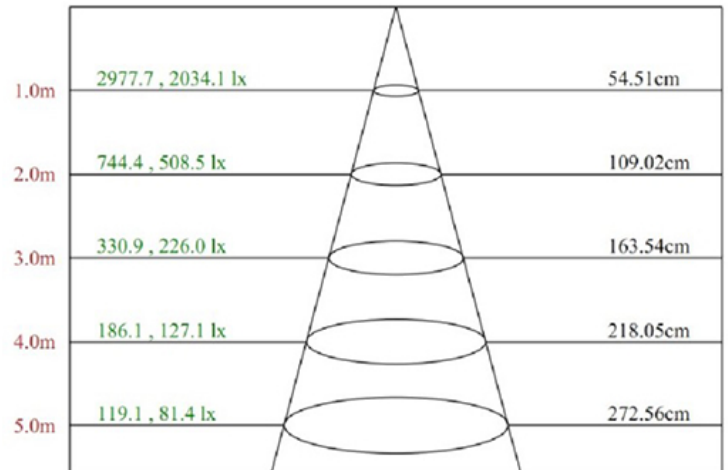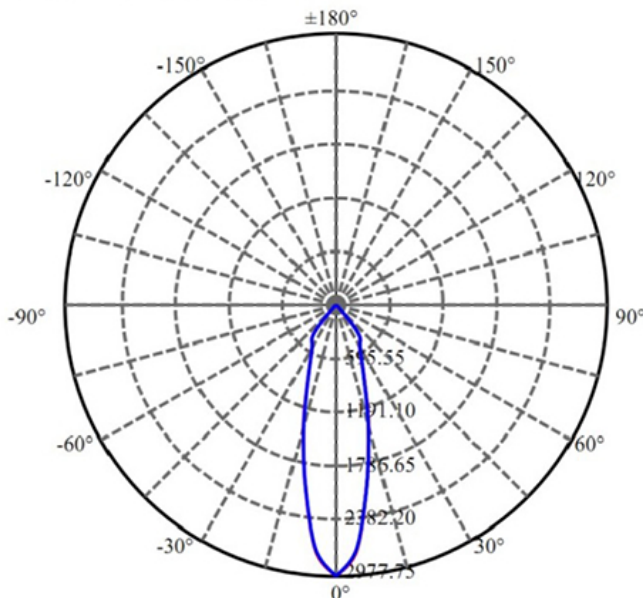

Max , Ave Beam angle of C0plane30.49

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

* 2-YEAR

Model:#	Description	wattage	lumens
LWP12TDN-BLK/CCT	12Watt LED Up or Down Cylinder Wall Sconce Black Color, 3CCT Color	12W	1200

* 2 Years Limited Warranty

UPC: 74616080043-1

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com



LW45-0323

LED TECHNOLOGY

50,000 Hours Life, 15 Watt, 120VAC 60Hz

Applications:

Entry Way, Patio Light, Porch Light, Wall Light

Features:

- Adjustable Lamp color Switch to: 3000K, 4000K, 5000K
- Integrated 12 Watt LED
- Rugged Corrosion Resistant Cast Aluminum Housing
- Tempered Glass Lens
- Fixture Can be Mounted to Shoot Light Up or Down
- Matte Bronze Color
- Outdoor Wet Location

ADJUSTABLE
LIGHT COLOR

3000K
WARM WHITE



4000K
COOL WHITE

5000K
DAY LIGHT



Specification:

Input Line Voltage:	120VAC
Input Power	12W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
CCT	3000K/4000K/5000K
CRI	≥80
Lumens	1200
Beam Angle	45°
CBCP	2977

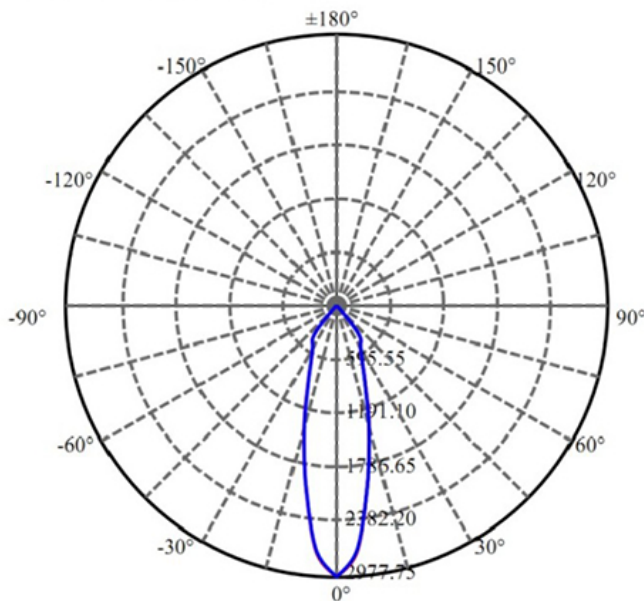

1.0m	2977.7 , 2034.1 lx	54.51cm
2.0m	744.4 , 508.5 lx	109.02cm
3.0m	330.9 , 226.0 lx	163.54cm
4.0m	186.1 , 127.1 lx	218.05cm
5.0m	119.1 , 81.4 lx	272.56cm

Max , Ave Beam angle of C0plane30.49

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

* 2-YEAR

Model:#	Description	wattage	lumens
LWP12TDN-BZ/CCT	12Watt LED Up or Down Cylinder Wall Sconce Bronze Color, 3CCT Color	12W	1200

* 2 Years Limited Warranty

UPC: 80680215622-4