




TECHNICAL SPECIFICATIONS				
VOLTS	120			
AMPS	12.5			
WATTS	1500			
HIGH	1500 watts			
HEATER	750 watts			
NO HEATER	22 watts			
QUANTITY	LED			
LAMPS WATTS				
TOTAL WATTS	22 watts			
ROTOR MOTOR	1 at 5 watts			
HEIGHT, WIDTH, DEPTH	23 1/2 x 58 5/8 x 12 "			
GLASS VIEWING OPENING	12 x 55 1/4"			
SURROUND SIZE	15 7/8 x 59 1/8			
SHIPPING SIZE	25 1/2 x 69 3/4 x 14 1/2'			
SHIPPING WEIGHT	128 lbs			
UNIT				
GLASS FRONT	Included			
PLUG LOCATION	Left Side			
CORD LENGTH	76"			
APPROX. HEATING AREA	400 sq ft			



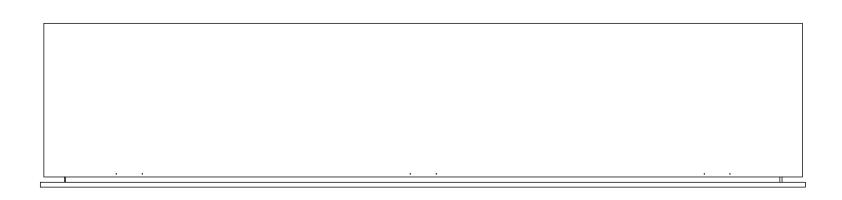


SERIES BUILT IN	BI-60-DEEP	CO US	REV 1
SCALE 1" = 1'-0"	DATE: 11/1/2014	SHEET 1 OF 1	

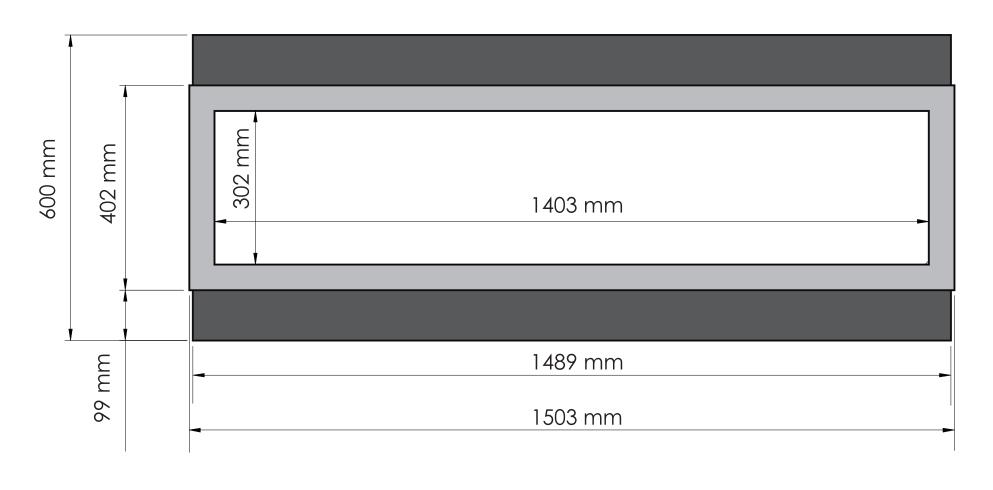

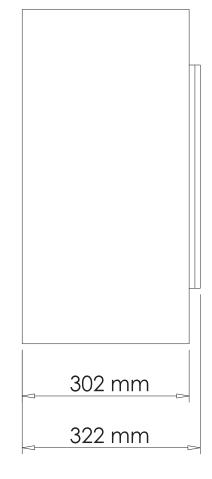

TECHNICAL SPECIFICATIONS							
VOLTS		120					
AMPS		12.5					
WATTS		1500					
	HIGH	1500 watts					
HEATER	LOW	750 watts					
NO HEATER		22 watts					
	QUANTITY	LED					
LAMPS	WATTS						
	TOTAL WATTS	22 watts					
ROTOR MOTOR HEIGHT, WIDTH, DEPTH GLASS VIEWING OPENING		1 at 5 watts 60 x 148.9 x 30.2 cm 30.2 x 140.3 cm					
				SURROUND SIZE		40.2 x 150.3 cm	
				SHIPPING SIZE		64 x 171.7 x 36.8 cm	
SHIPPING WEIGHT		58 kg					
	UNIT						
GLASS FRONT PLUG LOCATION		Included					
		Left Side					
CORD LENGTH		193 cm					
APPROX. HEATING AREA		37 sqm					

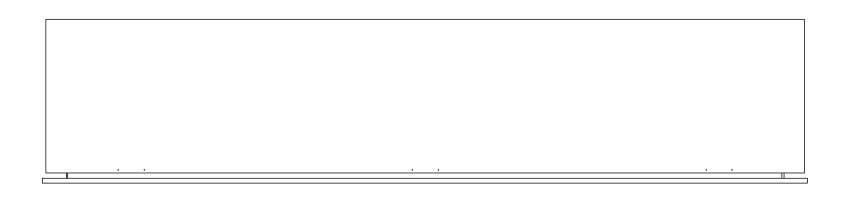



SERIES BUILT IN	MODEL BI-60-DEEP	C US	REV 1
SCALE 1:12	DATE: 11/1/2014	SHEET 1 OF 1	