

Multi-Fire[®] SL 36" Slim Linear Electric Fireplace

PLF3614-XS



With an incredibly shallow depth the Slim Linear allows builders, designers, property managers, and homeowners to incorporate a stylish Linear fireplace where space is limited. This Slim Linear electric fireplace sits flush with 2"x4" exterior framing, making this a game-changing and industry exclusive design.



Dimplex[®]


Multi-Fire[®] SL 36" Slim Linear Electric Fireplace



NEW! Flame Connect app

Download the Flame Connect app on your mobile device and create an account. Control your fireplace from anywhere. With the app you can add an extra level of personalization, such as saving customized mood settings.

Mood Themes

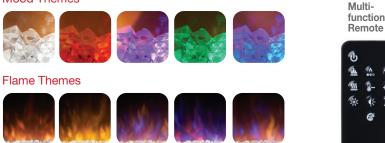

120 Volts | 1,500 Watts | 5,000 BTU | 12.5 Amps

Model #		Lbs / Kg (packaged)	UPC		Carton Dimensions (WxHxD)		Cube	
					Inches	cm	ft ³	m ³
PLF3614-XS	36" Slim Linear Electric Fireplace	49.7 / 22.6 (57.8 / 26.2)	781052137318	2 yr.	46-1/4 x 24-5/8 x 9-1/2	117.5 x 62.5 x 24.1	6.3	0.18
PLFXSPLUG	Plug Kit	0.6 / 0.29 (0.7 / 0.34)	781052139534		12 x 8 x 2	30.5 x 20.3 x 5.1	0.1	0.0031

Specifications, finishes and dimensions are subject to change. †Limited warranty. ©2022 Glen Dimplex Americas





PLF3614-XS

Features

Multi-Fire® SL Flame Effect Large, high-contrast flames feature a

multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of the seven preset options.

Media Accent Colors

Choose from a variety of brilliant color themes or cycle through a range of colors using the custom mode, selecting on the hue of your choice.

Customizable Flame

The Multi-Fire technology allows you to adjust the speed and color of the flame to create the perfect atmosphere to suit your mood or room.

Full Viewing Area

A slim size doesn't mean sacrifice. This smart design delivers an impressive viewing height of 14" and includes mirror technology that creates a grand illusion of depth.

♦ Slim Design

Installs flush into a 2"x4" wall for a seamless look or can be wall-mounted (bracket included) for quick and easy installation.

Flush Framing ۵

Flame

App

A. 0

¢. 8

đ

C Dimple>

8- +8

Connect

Removable factory-installed trim allows finish material right to the edge for a clean, flush finish.

Ambient Light Sensor

Automatically adjusts firebox light to suit the room day to night.

Built-in Timer \bigcirc Automatically turns the unit off after up to 8 hours.

Heat Management

Enjoy the ambiance of a fire during the warmer months by deactivating the heater via the controls, or hard disconnect the heater during installation where heat is not required.

Smart Self-Diagnostics

Integrated smart technology that works behind the scenes to enhance the performance of your fireplace by providing maintenance and operation feedback.

- Hardwire or Plug-in Hardwire to 120V power supply or purchase an optional 120V plug-in cord kit.

SE-535-B03-102522



Control your electric fireplaces, from the palm of your hand.



Connect your electric fireplaces Add as many fireplaces as you like

Personalize your product

to the Flame Connect App.

Change modes and settings on your fireplace to suit your mood.




Secure your device

Take ownership of a product to prevent unauthorized access.



NEW! Flame Connect app

Download the Flame Connect app on your mobile device and create an account. With the app you can add an extra level of personalization, such as saving customized mood settings.

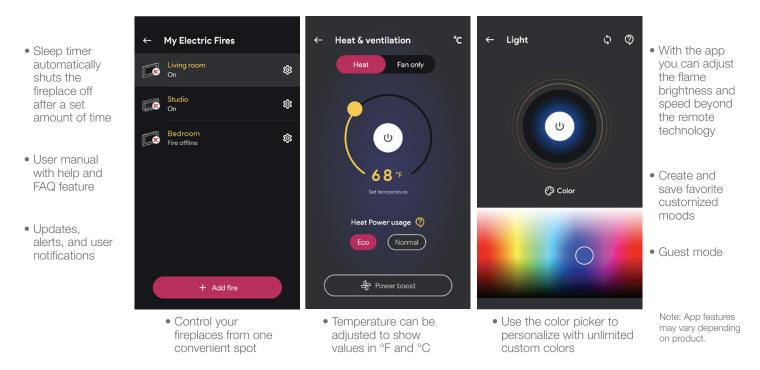

For additional information, visit dimplex.com/fcapp

Available in the App Store and Google Play



(2) A BRAND OF GLEN DIMPLEX AMERICAS

C Dimplex[®]







Multi-Fire[®] SL 36" Slim Linear Electric Fireplace

PLF3614-XS

Product Dimensions:

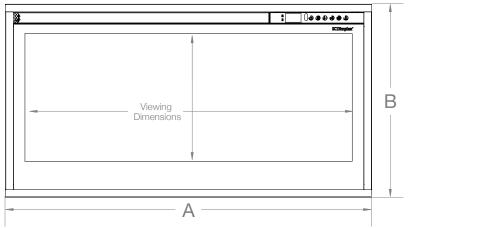




Product	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxH (in/cm)
PLF3614-XS	37-1/4 (94.6)	19-5/8 (49.8)	3-7/8 (9.8)	33-1/4 x 12-5/8 (84.5 x 32.2)

Framing:

Installation - 2 Mounting Options

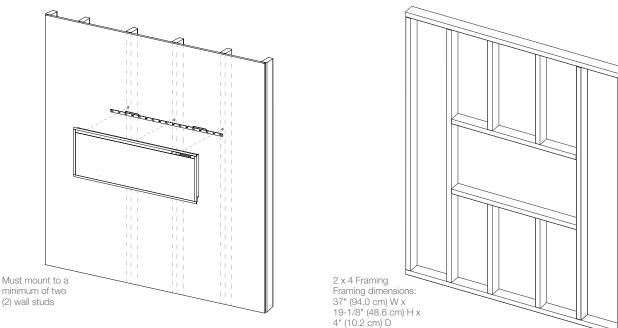

NOTE:

The Firebox is not load bearing. Do not stack weight of the frame on top of the firebox.

It is recommended that the bottom of the unit be mounted between 20 in. (50 cm) and 40 in. (100 cm) from the ground to maintain an optimized viewing angle of the flame.

*Includes 1/2 drywall