

### **PRODUCT FEATURES**



- Efficient front facing heater
- High/low & timer heater setting



- No Harmful Fumes Emitted
- No venting required



- Hard-wire compatible
- Serviceable from front of unit



- Enjoy flames without the heat.
- 3 sided view



- Overheat protection & auto shut-off
- Certified to strict building codes



Energy-Efficient LED LightingConnects to smart assistants





Download the Dynasty App Available on Android and iOS





### **FLAME CONTROLS**



Controllable
Red, White, and
Yellow
intensities, with
color mixing
capability

## **TOP ACCENT LIGHTING**




Warm and white top lighting, with controllable intensities

# **Melody DY-BTS40 Electric Fireplace**

## **Specifications Sheet**



Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS40	15A, 120V / 60HZ	1500 W	28 W	1.5 W	Standard (type B)     Hardwire ready	1000 mm W x 400 mm H	5000	1829 mm
D1-01340	134, 1207 7 60112	1300 W	20 00	1.5 W		39 % in. W x 15 ¾ in. H	3000	72 in.

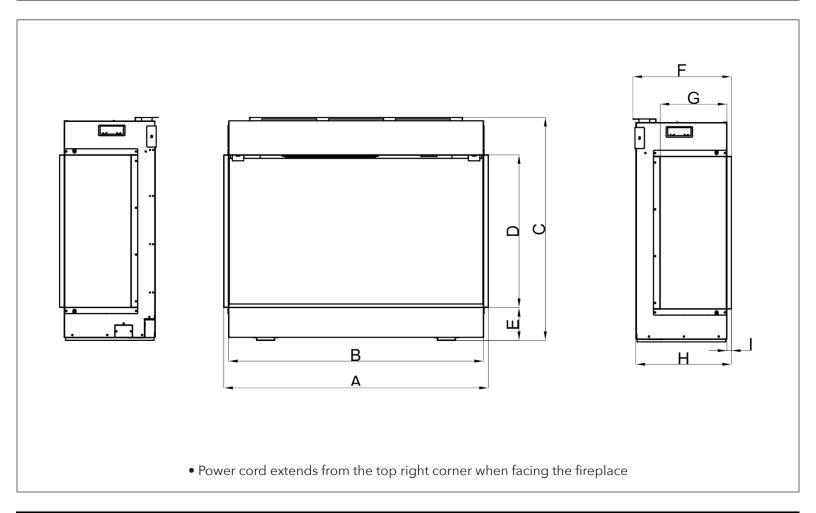

Model	Α	В	С	D	Е	F	G	Н	1
DY-BTS40	1032 mm	1000 mm	633 mm	400 mm	110 mm	325 mm	220 mm	315 mm	15 mm
	40 % in.	39 ¾ in.	25 in.	15 ¾ in.	4 ¾ in.	12 ¾ in.	8 % in.	12 ¾ in.	½ in.

## Certification





## Melody DY-BTS40 Electric Fireplace

**Specifications Sheet** 



#### **Clearances**

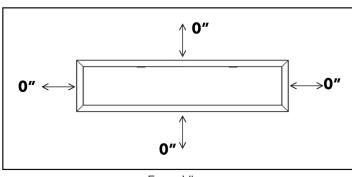




Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

Front View

- Side View
- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
  - Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

## **Framing**

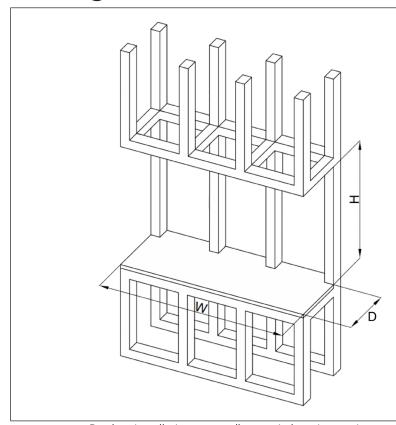

#### Framing Dimensions

W	H	Depth		
1010 mm	643 mm	320 mm		
39 ¾ in.	25 ¾ in.	12 ½ in.		

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



