



“DISCOVER A NEW PLEASURE IN CAMPING”



Jack Kirkham Sr. circa 1962
Inventor of the Springbar® Tent

IMPORTANT


- * Please read the instructions & watch the set-up video
- * Practice set-up at home before your trip
- * ALWAYS STORE IT DRY!

Enjoy Your Springbar® Tent

Any questions at all? Contact us, we're here to help.
service@springbar.com | (801) 486-4161

SET-UP GUIDE

1 Select a Site and Stake it Down.
Leisure Port MUST be securely staked down to function. In soft or sandy soil, sand stakes or dead-man anchors may be required to achieve necessary hold.

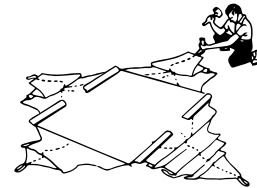

Tip: Make sure the floor is clipped in place. The floor serves as a template for proper stake placement.




Leisure Port Setup Video




Leisure Port Tips & Tricks Video


2 Insert Ridge Poles and Tension Rods.
Use 2 ridge poles, 1 Steel Sleeve, and 4 Tension Rods.

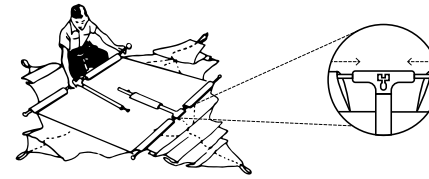

3 Tension the Roof Panel.
Place the ridge poles end to end and press down to tension the roof. Slide the steel sleeve over the connection point to secure the ridge.



Tip: The tension screw may be adjusted to achieve more or less tension as needed.

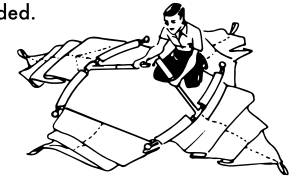


4 Install One Upright Pole.
Tip: Assemble the upright pole on the shortest setting. After installing, lengthen the pole until the walls are taut – but not too tight.




Tip: Do not confuse an Awning pole for an Upright pole. Upright poles measure 7 feet on the shortest setting.

Tip: When adjusting upright pole length, move the base of the upright pole away from the tent to relax tension. After the adjustment has been made, move the base of the upright pole back into position over the stake loop.

5 Install Second Upright Pole.
Tip: Follow the same procedure outlined in Step 4.

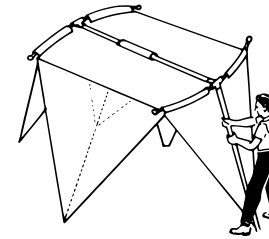

6 Enjoy your Springbar® Leisure Port.
Tip: Mesh zip-in panels, canvas zip-in panels, and the floor can be removed or installed as desired to create the perfect shelter.

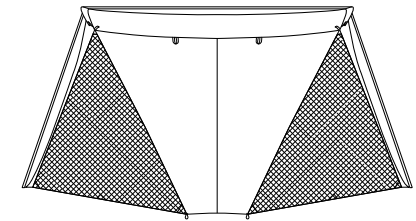

SPECS

SIZE 10' x 14' x 6.5'	PACKED DIMENSIONS 48 inches x 10 inches x 10 inches
WEIGHT 55 lbs. total (Tent body: 26 lbs. Poles: 25 lbs. Stakes: 4 lbs.)	
CANVAS (8.5oz walls, 10.1oz roof) 100% cotton, double-fill, boat shrunk army duck canvas. Finished with HardyDuck™ for water repellency and anti-mold. Watertight, breathable, and highly durable.	
POLES EP coated steel 10' x 14' Springbar® pole set.	
MESH/ZIPPERS Durable no-see-um window mesh. #10 SBS Zippers throughout.	
FLOOR Removable Vinyl Floor. Heavy-duty and fully waterproof.	
STAKE LOOPS Steel wire stake loops with perimeter rope reinforcement. Incredibly strong and a hallmark of genuine Springbar® Tent design.	
STAKES 12" plated steel nail stakes	

LEISURE PORT INCLUDES

MAINTENANCE TIPS

STORE IT DRY, STORE IT CLEAN!
That goes for the poles too.

With proper care, a Springbar® Tent is built to last a lifetime.

REPAIRS

We work hard to keep tents in the great outdoors and out of landfills. Our Salt Lake City Sew Shop can repair or replace just about anything. It's how we do sustainability.

Contact us to schedule a repair.

SATISFACTION GUARANTEE

Love your tent or we'll make it right. We've got you covered.

SERVICE & SUPPORT

Springbar® representatives are standing by to assist you.

By Email: service@springbar.com
By Phone: (801) 486-4161
By Post: 4026 S West Temple
Millcreek, Utah, 84107

WARNING

DANGER
Carbon monoxide gas will cause death. Using a portable gas heater, gas stove, gas lantern, or other gas appliance inside a tent can produce carbon monoxide.

Failure to follow these warnings may result in death or serious injury.

WARNING
DO maintain adequate ventilation inside tent at all times.
DO anchor tent properly at all times to reduce the risk of loss or injury.
DO NOT leave children unattended inside a tent.
DO NOT allow children to assemble a tent.
DO NOT allow children to remain in a closed up tent on hot days.

Failure to follow these instructions may result in death, serious injury, or permanent disability to you or others.

WARNING
Keep all flames away from this tent fabric. This tent is not fireproof. The fabric will burn if left in continuous contact with any flame source.

Failure to follow these instructions may result in death, serious injury, or permanent disability to you or others.