
	•	
Features:	Dimension (Unit:mm):	
Adopt waterproof design, no adhesive to cause leakage of aging, easy to disassemble;	П	Поли
2. Die-casting aluminum alloy lamp body, high toughened glass cover; solid and durable;	□10W	□20V
corrosion-proof;	ø6.50	88.7
3. High efficiency thermal management, LEDs and power supply work in low temperature,		1
and high stability of continuous operating.		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
4. Can on-off frequently, no flicker and glare; high CRI; Compact appearance, novel design,	60.00	. 96.2
easy to install and transport.		
Application:  Mainly applied in outdoor flood lighting, building decoration, industry, sports center, outdoor stadium, port, parking lot, and road if there is street light distribution system.  Parameters:	134.50	200
Beam Angle:	147.00	L
☑ 120° □ Other		
LED Type:	□30W	Ø 50V
LED Quantity:	93	ę,
☐ 1PCS ☐ 2PCS ☐ Other	<b>3</b>	E H
Life Span:	139.50	
Application Environment:		
Net Weight:	243.00	30
□0.65kg/pcs □1.15kg/pcs □1.85kg/pcs □2.8kg/pcs □Other		
Gross Weight:		
□ 0.85kg/pcs □ 1.45kg/pcs □ 2.2kg/pcs □ 3.2kg/pcs □ Other	d	
IP Rating: ☐ IP40 ☐ Other		H
Materials: ☑ aluminum alloy+Tempered glass ☐ Other		
Protection against electric shock: 1P65 Other	258.00	3





Step3: Fix the bracket and light together with bolts and nuts Step3: Fix the bracket and light together with bolts and nuts

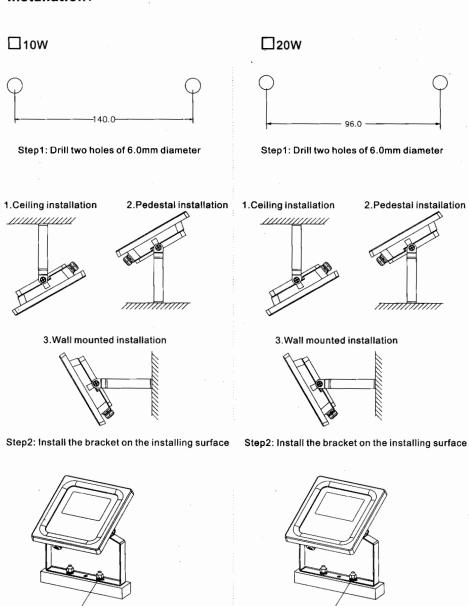