

Model: VBD-012-300VTHWJ

Input Voltage:	100 – 277V AC
Input Current at Max Load:	3.4 A
Frequency:	47-63 Hz
Output Voltage:	12V DC
Output Current:	25 A
Max Power:	300W
Dimensions L x W x H:	440 x 86 x 60 mm
Class Certification:	Class P/ Type HL
Weight:	2.4 kg
IP Rating:	IP65 (Dry, Damp, and Wet Locations)
Dimmable:	Triac/ Phase-cut Dimming
Wiring/Housing:	Hardwire
Operating Temperature:	at least 90°C
Standards:	FC/UL/RoHS

ORDER INFORMATION

Please **download** and fill out this interactive form and press the **SUBMIT** button to send it electronically.

Name: _____

Project Name: _____


Email: _____

Phone: _____

Quantity: _____


Notes: _____

Installation Diagram

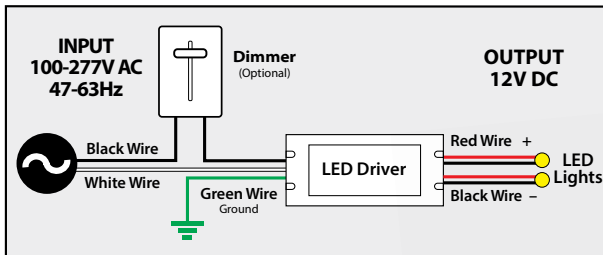

Dimming

Veroboard Phase Cut Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, or TRIAC dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

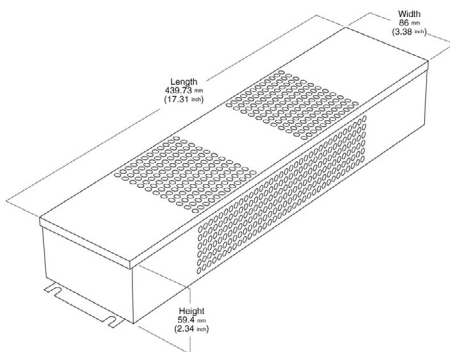

**12V DC
300W**

SKU: 666561419790