

VEROBOARD®

2" Mini LED Recessed Gimbal




Veroboard 2-inch mini LED recessed gimbal comes with an IC-rated LED driver. It comes with zero flickers and with a rendering index of 90+. This light has a feature of selecting the light color from five temperatures ranging from 2700K-3000K-3500K to 4000K-5000K. The fixture easily fits in a 54 mm hole size with an easy installation using push spring clips. Moreover, the gimbal helps in adjusting the light in the needed direction with a 30-degree tilt angle.

SPECIFICATIONS

Engine Model No:	AD-LED-2-S5W-5CCTWH-EY
Voltage:	120V AC
Frequency:	50/60Hz
Wattage:	5W
LED Driver:	IC Rated
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Gimbal Tilt Angle:	30°
Beam Angle:	40°
Dimmable:	Yes
Dimming:	100 - 10%
Dimmers:	LED/CEL Dimmers
Brightness:	400 Lumens
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
Fixture Color:	White
Fixture Material:	Die-Cast Aluminum
Rated Life:	50,000 Hours
Installation:	Recessed/Flush Mount
IP Rating:	IP20 (Damp Locations)
Outer Dimensions:	Ø 65.31mm (2.57 in) x 35mm (1.37 in) Depth
LED Driver Dimensions:	Ø 51.75 mm (2.0 in) x 100.50 mm (4.0 in) Length
Cut Size:	54 mm (2.125 in)
Package Content:	Gimbal with IC-Rated LED Driver
Package Dimensions:	5.4 x 4.6 x 2.9 in (13.8 x 11.8 x 7.3 cm)
Package Weight:	0.316 Kg
Certification:	FCC/ETL/Energy Star/RoHS

Name: _____
Quantity: _____
Phone: _____
Email: _____

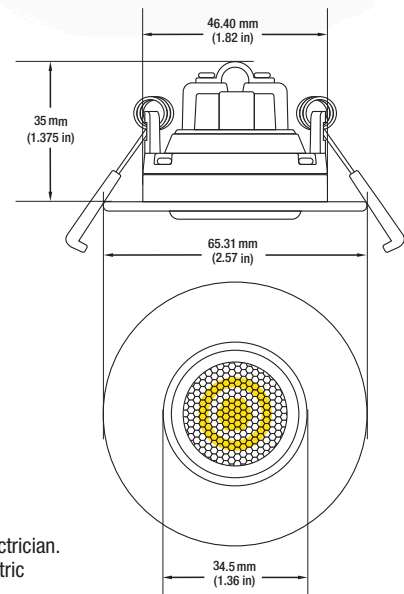

Selectable
Color Temperature
Switch



LED Driver Dimensions:
Diameter: 51.75 mm (2.0 in)
Length: 100.50 mm (4.0 in)

Safety and Warning

The fixture must be wired in accordance with local electrical codes. And all the installation must be done by a certified electrician. Please be sure the main power switch is OFF before the installation or attempting any maintenance. There is a risk of electric shock, do not expose wiring to the edges of the sheet metal or any other sharp object.

Do not modify the product, any modification may render the product unsafe and void the warranty. Read all the instructions from the installation manual before installing. This product is suitable for dry and damp locations only.

SKU: 66561425142