



CV Triac Dimmable LED Driver

| | |
|----------------------------------|---------------------------|
| Model No: | OTM-TDJ20-24 |
| Input Voltage: | 100-130V AC |
| Input Current: | 0.24A |
| Frequency: | 50-60 Hz |
| Output Voltage: | 24V DC |
| Output Current: | 0.83A |
| Max Power: | 20W |
| Dimensions L x W x H: | 139.75mm x 45mm x 27.27mm |
| Ambient Temperature (Ta): | 50°C |
| Case Temperature (Tc): | 90°C |
| IP Rating: | IP20 |
| Dimmable: | Triac/Phase-Cut Dimming |
| Wiring/Housing: | Hardwire |
| Standards: | CE/ETL/RoHS |


Job Name: _____

Distributor: _____

Type: _____

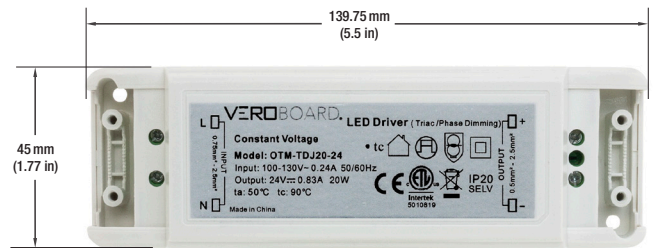

Installation Diagram

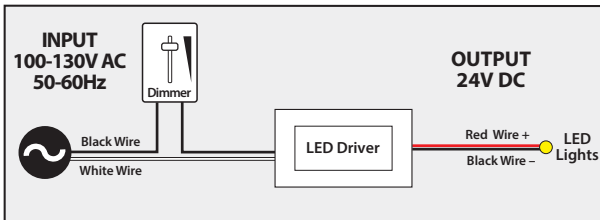

Triac Dimming

Veroboard Constant Voltage Triac Dimming LED Driver works with any standard Leading Edge MLV, TRIAC, or nearly many Lutron/ Leviton dimmers. The dimmer switch installed should be on the 120VAC side of the LED driver.



**24V DC
20W**

SKU: 666561425463