
VERDBOARD.

OTM-TD252500-250-12 Constant Current 250mA 24-48V 12W Dimmable

| Model No.: | 0TM-TD252500-250-12 |
|------------------------------|-------------------------------------|
| Input Voltage: | 90-130V AC |
| Input Current: | 0.9A |
| Input Frequency: | 50/60Hz |
| Output Voltage: | 24-48V DC |
| Output Current: | 250mA |
| Max Load: | 12W |
| Dimmable: | Yes (Triac Dimming - Trailing Edge) |
| IP Rating: | Indoor |
| Class Certifications: | Class 2 Class P Type HL |
| Dimensions: | 88mm x 38mm x 21mm |
| Wiring/Housing: | Hardwire |
| Operating Temperature: | -20°C~+40°C |
| operating reinperature. | |
| Standards: | CE/ETL/RoHS |

| Job Name: | |
|--------------|--|
| Distributor: | |
| Туре: | |



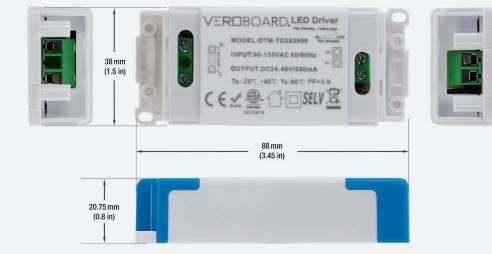

Intertek CE Rohs SELV



SKU: 666561426422

Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.