



DC Sports
13000 Temple Ave
City of Industry Ca, 91746
T. 626-937-6988
www.dcsports.com

CSB5533
Strut Tower Bar Installation Instructions
2006- 2011 Honda Civic All Model

READ ALL INSTRUCTIONS THROUGH COMPLETELY BEFORE BEGINNING INSTALLATION.

IF YOU ARE NOT COMFORTABLE AND/OR FAMILIAR WITH THESE INSTRUCTIONS, PLEASE REFER THIS INSTALLATION TO A QUALIFIED PROFESSIONAL.

TOOLS REQUIRED
Socket wrench, 14mm socket, 17 mm socket
Trim Removal Tool
Jack
Jack Stands


1. Using the Trim Removal Tool, pop the caps off the windshield wiper screw. Using a 17 mm socket loosen the screws holding the wipers to the car. Gently pull up on the wipers to remove (Picture A).
2. With hood open use Trim Removal Tool to remove three (3) tabs holding down the windshield plastic molding. Gently pull windshield molding trim up to remove from vehicle (Picture B).
3. Using the Trim Removal Tool remove one (1) tab from each side holding the edges of the windshield plastic molding. Gently pull up on the trim pieces to remove from vehicle (Picture C).
4. Using a 14 mm socket remove the three (3) nuts holding the strut bars on each side (Picture D)
5. Get the car on flat ground, jack up the front end just enough to allow you the strut screws to drop down half an inch and place the vehicle on proper jack stands.
6. Install strut bar. Make sure all the bolt holes line up with the bolts (Picture E).
7. Reinstall strut bar nuts and torque down to spec.
8. Remove vehicle from jack stands.
9. Check to make sure strut bar clears everything.
10. Reinstall the windshield plastic molding and all the tabs.
11. Reinstall windshield wipers.
12. **RECHECK ALL YOUR WORK.**

PARTS LIST

Quantity	Part Number	Part Description
1	CSB5533	Carbon steel strut bar
2	DCS1008	DC Sports decals



Picture A

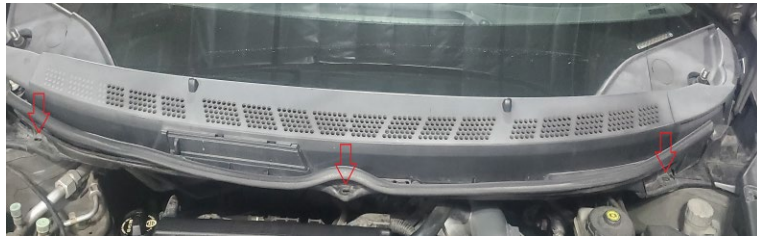

Picture B



Picture C



Picture D



Picture E

THANK YOU FOR CHOOSING DC SPORTS