



DC Sports
13000 Temple Ave
City of Industry Ca, 91746
T. 626-937-6988
www.dcsports.com

CSB5534

Strut Tower Bar Installation Instructions

2018-2020 Honda Accord 1.5L & 2.0L

READ ALL INSTRUCTIONS THROUGH COMPLETELY BEFORE BEGINNING INSTALLATION.

IF YOU ARE NOT COMFORTABLE AND/OR FAMILIAR WITH THESE INSTRUCTIONS, PLEASE REFER THIS INSTALLATION TO A QUALIFIED PROFESSIONAL.

*****LIMITED LIFETIME WARRANTY*****

DC Sports limited lifetime warranty covers claims due to poor workmanship. We do not cover normal wear and tear damages due to misuse or abuse. We do not warranty the finish of these products.

*****WARRANTY CLAIMS*****

All warranty claims must be shipped prepaid by the customer to DC Sports.

Warranty claims must have an RMA (Return Merchandise Authorization) number on the box or package will be refused and sent back to the shipper.

Tools Required:

3/8 socket wrench
14mm Socket Deep

1. Disconnect negative battery terminal.
2. Rotate negative battery terminal 90 degrees and reinstall. (Photo A & B) Please note direction of terminal stud. In factory orientation the stud faces the driver fender. In new orientation the stud should face toward the rear of the car.
3. Remove six (6) M10 nuts from driver side and passenger side strut tower.
4. Using proved M10 nuts install CBS5534 over factory strut mount studs. Torque down to 36ft lbs.
5. *****Removal or modification of engine cover may be required for 2.0L*****
6. **RECHECK ALL YOUR WORK.**

Parts List

Quantity	Part Number	Part Description
1	CSB5534	CSB5534 Front tower Brace
6	RHNA-M10x1.25	M10x1.25 nut
1	DCDECAL	DC Sports Decal

THANK YOU FOR CHOOSING DC SPORTS

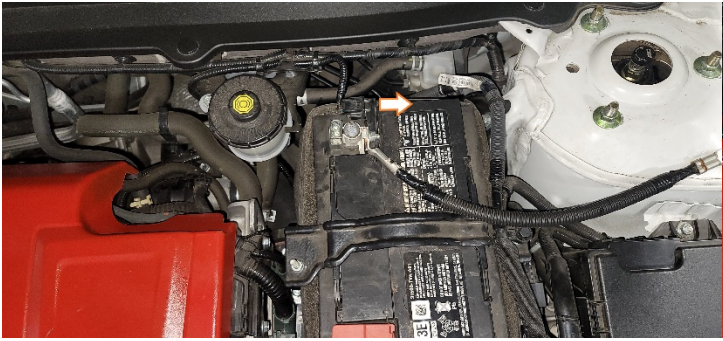


Photo A (before)



Photo B (after)

