

DC Sports

13000 Temple Ave City of Industry Ca, 91746 T. 626-937-6988 www.dcsports.com

SRI2000 SHORT RAM INTAKE INSTALLATION INSTRUCTIONS 2018-2020 Kia Stinger 2.0 L

!!! READ ALL INSTRUCTION THROUGHLY BEFORE BEGINNING INSTALLATION. FAILURE TO DO SO MAY RESULT IN COSTLY ENGINE AND/OR SYSTEM DAMAGE!!!

IF UNSURE ABOUT INTAKE SYSTEM INSTALLATION PLEASE HAVE A REPUTABLE PERFORMANCE SHOP OR A LICENCED MECHANIC INSTALL THIS SYSTEM

FOR YOUR SAFETY, ALLOW ENGINE TO COOL FOR AT LEAST AN HOUR BEFORE BEGINNING INSTALLATION

PLEASE CHECK AND MAKE SURE ALL HARDWARE IS PRESENT BEFORE INSTALLATION. PARTS LIST ON LAST PAGE

TOOLS REQUIRERD

Socket wrench, 10mm socket, 12mm Socket
Phillips Screwdriver
Flat head Screwdriver
Pliers
10" Extension

REMOVAL OF STOCK INTAKE AND INSTALLATION OF INTAKE SYSTEM

- 1. Disconnect battery terminals
- 2. Remove two (2) 12 mm bolts holding strut bar (Photo A).
- 3. Remove the three (3) hoses going into the intake tube (Photo B).
- 4. Loosen clamps that goes from the rubber intake tube to the intake box and the throttle body and gently pull it out.
- 5. Remove the three (3) 10 mm screws holding the intake box to the car (Photo C) and pull intake box off car.
- 6. Locate the two (2) 10mm bolts securing the air duct. (Photo D) and remove air duct from car.
- 7. Install rubber on heat shield. The thin rubber goes on the bottom of the heat shield while the thick one goes on the top (Photo E).
- 8. Install heat shield on vehicle. Use two (2) 10 mm screws that you previously removed for this install.
- 9. Assemble the intake tube by installing the filter kit and the coupler. Use clamps to secure everything (Photo F).
- 10. Install intake onto car. Tighten down clamp from coupler to throttle body (Photo G).

- 11. Install the three (3) hoses onto the intake tube. Use the O.E. clamps (Photo G)
- 12. Install the strut bar back.
- 13. Double check your work! Make sure that you have no interference issue, clamps and hardware are tight.

LIMITED 3 YEAR WARRANTY

DC Sports only warranty's intake systems due to poor workmanship. We do not cover normal wear and tear damages due to misuse or abuse. We do not warranty the finish of intake tubes.

Warranty covers the original owner of intake system by having proof of purchase. We have the right to void all warranty if you cannot provide the information needed by DC Sports. DC Sports does not cover any cost for installation or removal of products.

CAUTION

DC Sports does not assume any liability for damage caused by rain or floods causing the intake system for taking on water. We recommend that you remove the cold air intake system due to wet conditions.

WARRANTY CLAIMS

All warranty claims must be shipped prepaid by the customer to DC Sports.

Warranty claims must have an RMA (Return Merchandise Authorization) number on the box or package will be refused and sent back to the shipper.

PARTS LIST

| Quantity | Part Number | Part Description |
|----------|-------------|-----------------------------|
| 1 | DCSRP2000 | SRI2000 Primary intake tube |
| 1 | DCHS2000 | SRI2000 Heat shield |
| 1 | DCCP225-300 | 3-2.25" Reducing coupler |
| 3 | DCCL300 | 3" clamp |
| 1 | DCCL225 | 2.25" clamp |
| 25" | DCTS_Trim | Heatshield Trim |
| 11 | DCTR_TRim | Trim seal 11" |
| 1 | DC-RAF35001 | 3.5" Filter Pack |
| 1 | DCBADGE-L | DC Badge Large |
| 2 | DCDECAL | DC Sports DECALS |



Photo A



Photo B



Photo C

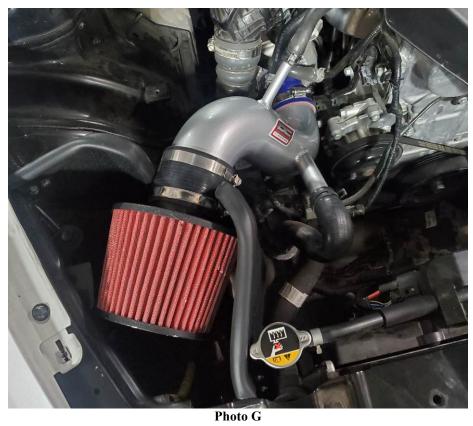



Photo D





Photo F



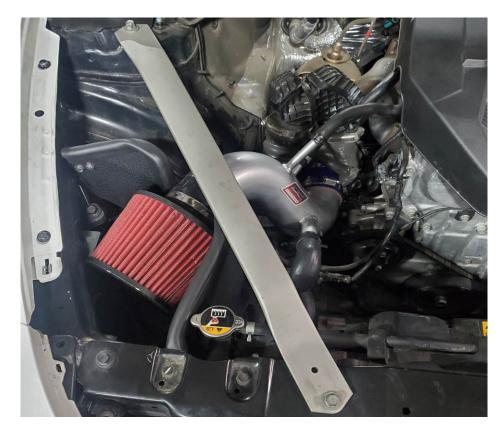

THANK YOU FOR CHOOSING DC SPORTS