



DC Sports
13000 Temple Ave
City of Industry Ca, 91746
T. 626-937-6988
www.dcsports.com

SRI5534
SHORT RAM INTAKE INSTALLATION INSTRUCTIONS
2018-2020 Honda Accord 2.0L Turbo

!!! READ ALL INSTRUCTION THOROUGHLY BEFORE BEGINNING INSTALLATION. FAILURE TO DO SO MAY RESULT IN COSTLY ENGINE AND/OR SYSTEM DAMAGE!!!

*****IF UNSURE ABOUT INTAKE SYSTEM INSTALLATION PLEASE HAVE A REPUTABLE PERFORMANCE SHOP OR A LICENCED MECHANIC INSTALL THIS SYSTEM*****

*****FOR YOUR SAFETY, ALLOW ENGINE TO COOL FOR AT LEAST AN HOUR BEFORE BEGINNING INSTALLATION*****

*****PLEASE CHECK AND MAKE SURE ALL HARDWARE IS PRESENT BEFORE INSTALLATION. PARTS LIST ON LAST PAGE*****

TOOLS REQUIRERD

**Socket wrench, 10mm socket, 5.5mm Socket
Phillips Screwdriver
Flat head Screwdriver
10mm Ratcheting Wrench
Pliers
10" Extension**

REMOVAL OF STOCK INTAKE AND INSTALLATION OF INTAKE SYSTEM

1. Disconnect battery terminals.
2. Carefully Remove four (4) clips holding down air snorkel. Remove air snorkel.
3. Disconnect MAF connector
4. Loosen clamp on intake tube. (photo A)
5. Locate and remove two (2) 10mm bolts securing recirculation valve to intake tube. (photo B) Then remove recirculation valve from intake tube.
6. Unclip both oem airbox latches and remove upper airbox with intake tube.
7. Remove two (2) bolts that secure lower intake box. (photo C)
8. With intake box and tube removed. Locate the small tab on the OEM intake coupler. Take a pair of flush cuts or small razor blade and cut that off. Install provided 3" clamp. (photo D)
9. Use provided hardware to assemble DC Sports heatshield (photo E). There will be five (5) bolts and nuts total. Make sure these are tightened securely.
10. Locate and remove rubber grommet form lower intake box. Take that grommet and install it onto the DC short heatshield as shown in. (photo F)
11. Install DC Sports vibration mount into the location shown in (photo G) and make sure that it is secure.

12. Install DC Sports Heatshield and secure using provided m6 bolt and washer. (photo H)
13. Take provided heatshield trim and install as shown (photo I)
14. Remove MAF sensor from OEM intake box and install it onto DC Sports intake tube.
15. Fully insert DC Sports intake tube into oem coupler. Rotate tube until mounting bracket lines up with the vibration mounts. At this point you can tighten the coupler clamp but do not tighten down the mounting bracket.
16. Install DC Sports filter onto DC sports intake tube. Once the filter is fully installed you can then tighten down mounting bracket.
17. Reinstall air recirculation valve onto DC Sports intake tube and secure using oem hardware.
18. Reinstall air snorkel and oem clips. Fitment will be tight.
19. Double check your work! Make sure that you have no interference issues, clamps and hardware are tight.
20. Reconnect battery terminals.

Note: BRAKE, TPMS, STABILITY CONTROL & TCS may appear during start up, do not panic. This is normal and very common on MOST new Honda applications after the battery has been disconnected. Please safely drive the car for 5-10 miles, the lights will automatically reset. If they do not reset in that distance please safely pull over, turn the car off and back on, light should be reset by the next start up.

*****LIMITED 3 YEAR WARRANTY*****

DC Sports only warranty's intake systems due to poor workmanship. We do not cover normal wear and tear damages due to misuse or abuse. We do not warranty the finish of intake tubes.

Warranty covers the original owner of intake system by having proof of purchase. We have the right to void all warranty if you cannot provide the information needed by DC Sports. DC Sports does not cover any cost for installation or removal of products.

*****CAUTION*****

DC Sports does not assume any liability for damage caused by rain or floods causing the intake system for taking on water. We recommend that you remove the cold air intake system due to wet conditions.

*****WARRANTY CLAIMS*****

All warranty claims must be shipped prepaid by the customer to DC Sports. Warranty claims must have an RMA (Return Merchandise Authorization) number on the box or package will be refused and sent back to the shipper.

PARTS LIST

Quantity	Part Number	Part Description
1	DCSRP5534	SRI5534 Primary Intake tube
1	CSHS5534	SRI5534 Heatshield
1	DCVM6MM	M6 M/M Vibra Mount
28"	DCTS TRIM	Heatshield Trim
1	RHBA-M6x1.00x15	M6x1.00x15 MM long bolt
1	WA-M6	M6 Washer
1	DCCL300	3" clamp
1	DCF-300	DC Sports 3" Filter Pack
1	DCDECAL	DC Decals
1	DCBADGE-S	DC Badge Small

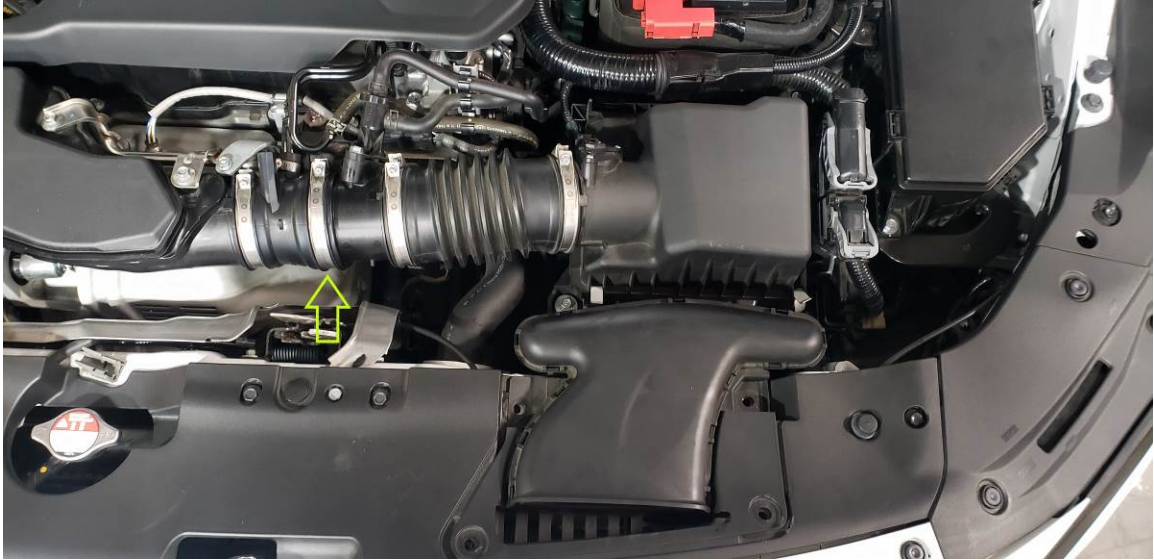


Photo A

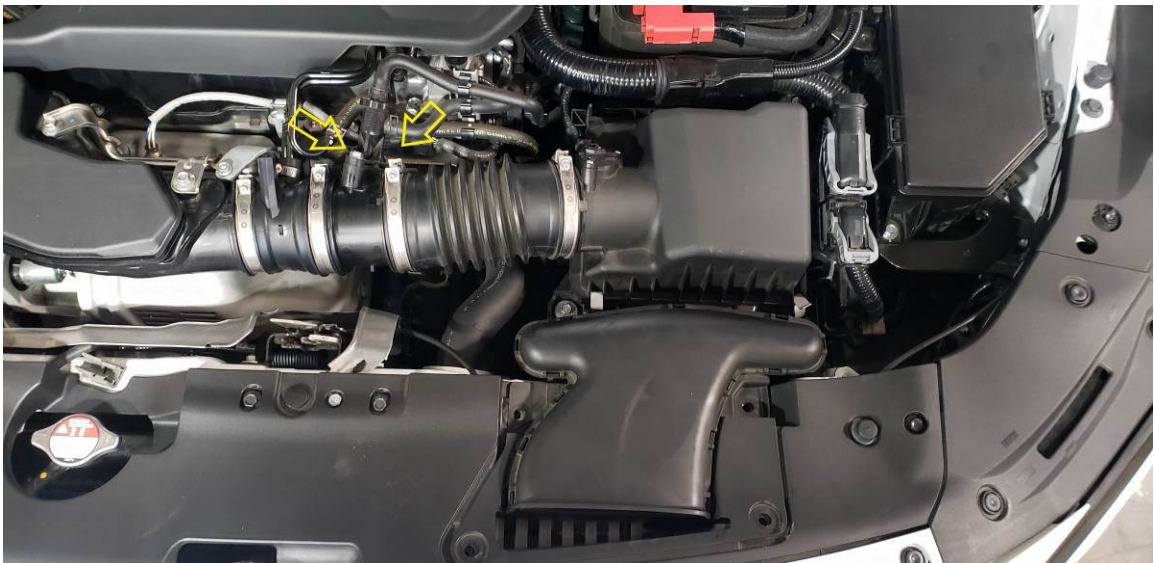


Photo B

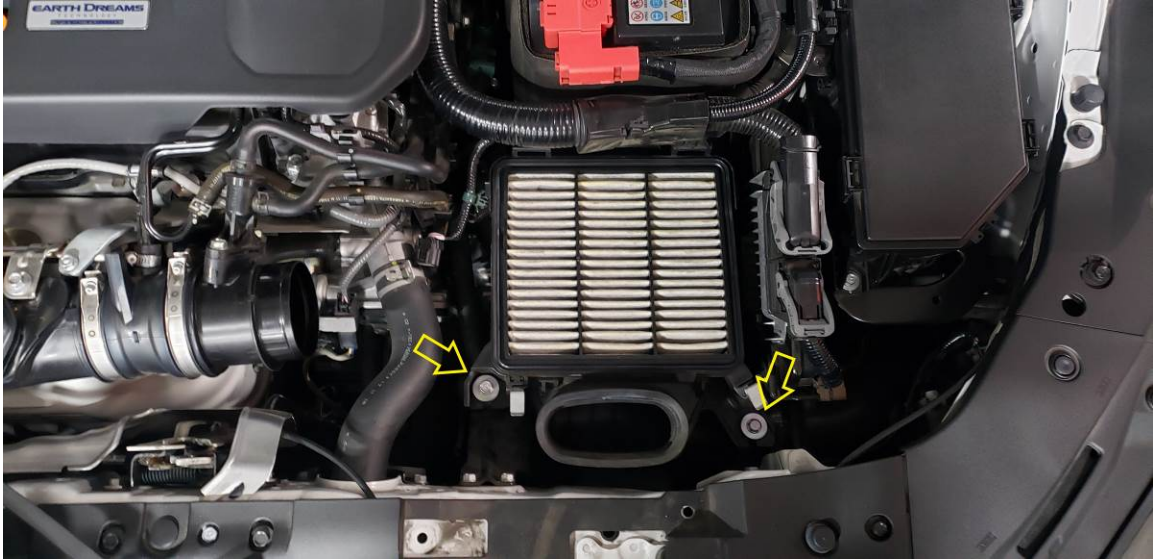


Photo C



Photo D



Photo E



Photo F



Photo G

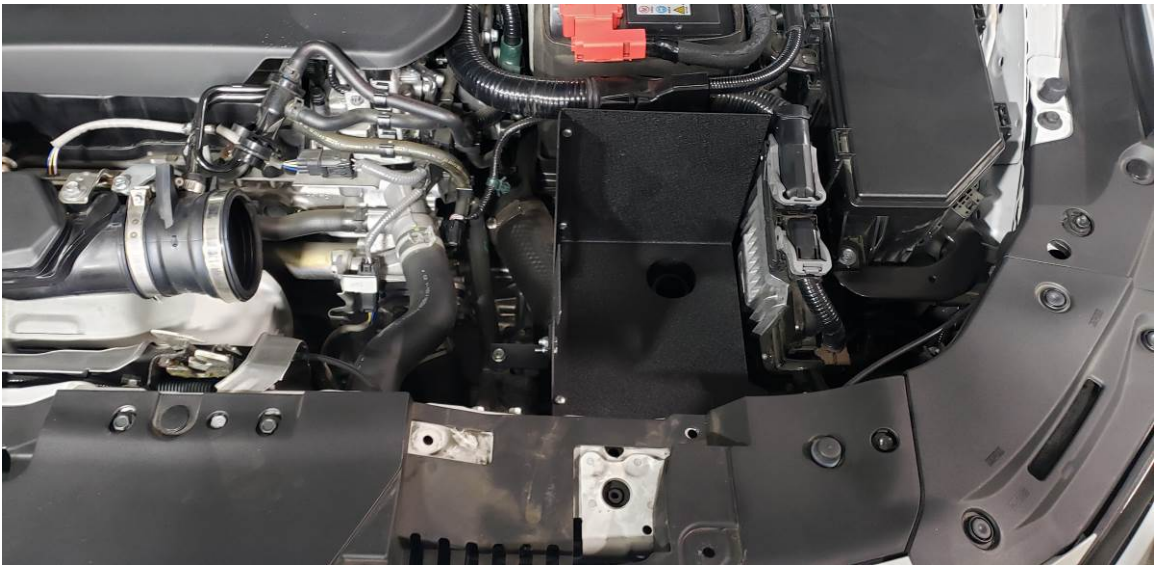


Photo H

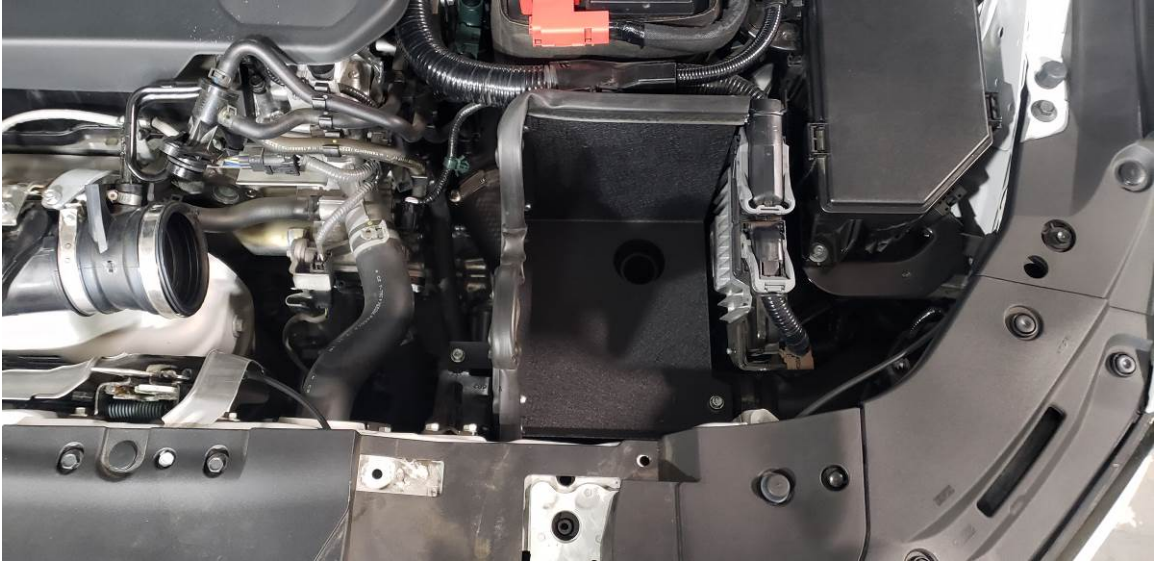


Photo I



THANK YOU FOR CHOOSING DC SPORTS