


MODEL NAME **2004-WH**
ACCESS
4-Inch Round Recessed Panel Light

Our LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.




PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

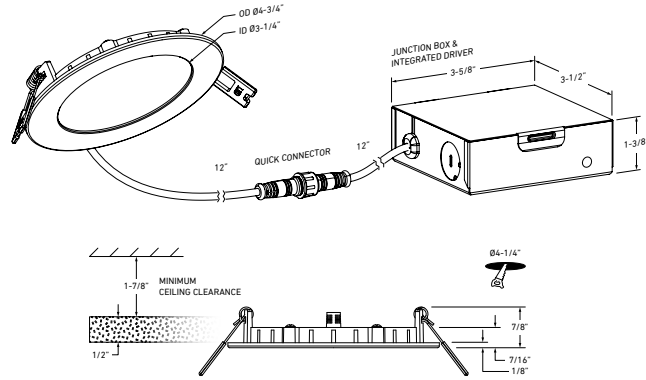

QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	11W	770lm	3000K	80	120V	110°	○ White

LIGHT DISTRIBUTION

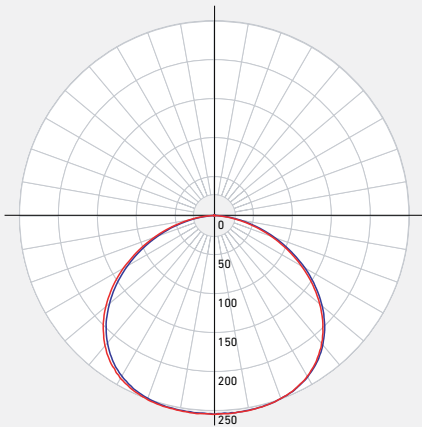

CONSTRUCTION	Lens Frosted	Type of optics Flat lens	Type of LED Edge-lit SMD
	Lens material Acrylic	Housing material Cast aluminum	Cut hole size 4-1/4"

RATINGS	Placement Indoor	Lifespan 35,000 hrs.	FT rating FT4
	Location Damp	Certifications ETL, FCC, ICES, ES IC, ASTM E283-04	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- Wire nuts
- Mounting hardware
- Instruction sheet

COMPATIBLE ACCESSORIES

RFP-UNI
Universal Drilling Plate For 2", 3", 4" and 6" fixtures

RFP-46
Drilling plate for 4" and 6" fixtures

COMPATIBLE ADAPTERS

REC-EXT108
108" extension cord for recessed fixtures

REC-EXT230
230" extension cord for recessed fixtures



**ELECTRICAL
DETAILS**

Input voltage
108-132V

Output current
250mA

Power factor
98%

Driver type
Constant current

Output voltage
30-46V

LED model #
2835

**THD harmonic
distortion**
<30%

Binning type
3 SDCM

FEATURES

Every fixture includes
a junction box with an
integrated driver

Superior LED
performance and
lifespan

Minimal heat emission

Frosted lens

Very low profile

Can be daisy chained

Smooth 360° wide
spread

Edge lit technology

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	Min: 7 / Max: 100	27
Lutron	DVCL-153PR-WH-C	Triac, 150W Dimmable CFL/LED	Compatible	Min: 9 / Max: 100	13
Lutron	CTCL-153PDH-WH-C	Triac, 150W Dimmable CFL/LED	Compatible	Min: 9 / Max: 100	13
Lutron	STCL-153PH-WH-C	Triac, 150W Dimmable CFL/LED	Compatible	Min: 3 / Max: 100	13
Lutron	DVWCL-153PH-WHC	Triac, 150W Dimmable CFL/LED	Compatible	Min: 9 / Max: 100	13
Lutron	MACL-153MRHW-WHC	Triac, 150W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	13
Lutron	DVELV-300P-WH	ELV, 300W LED/CFL	Compatible	Min: 9 / Max: 100	27
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	22
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	27
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 4 / Max: 100	22
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	Min: 1 / Max: 100	22
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	Min: 22 / Max: 100	13
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	Min: 19 / Max: 100	40
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	13
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 19 / Max: 100	13
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 19 / Max: 100	13
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	Min: 11 / Max: 100	27
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 13 / Max: 100	40
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	40
Legrand	ADPD453LM2	Triac, 450W Dimmable CFL/LED	Compatible	Min: 39 / Max: 100	40
Legrand	RHL373PW	Triac, 250W LED	Compatible	Min: 7 / Max: 100	22
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 3 / Max: 100	10

* Minimal buzzing noise may occur with some dimmers