


# SCH

## PORTABLE MULTIPURPOSE HEATER

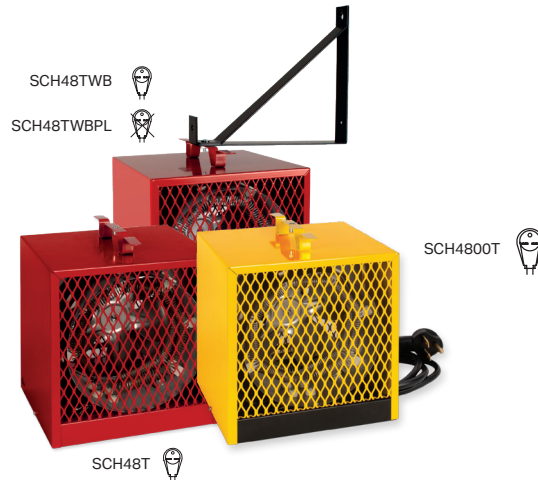

## EFFICIENT, SAFE AND VERSATILE

Any construction worker will tell you that the SCH is the fast-acting heating unit most often found on construction sites, hence its nickname: "the construction heater." Housed in a 20-gauge steel casing, it features a rugged protective grille and nichrome element for instant heat at start-up. Despite its small size, this heating powerhouse boasts 4800 W. The SCH can be placed on the ground or against a wall, using a support bracket, available as an option. This heater is right at home, on construction sites and in workshops and garages. Choose the SCH when you need rapid, reliable heat.

### SAFE AND RUGGED

20-GAUGE STEEL

### "COOL TOUCH" HOUSING

**4800 W HOUSED IN  
A SMALL UNIT**

**OPEN COIL GENERATES  
INSTANT HEAT**

**PERMANENTLY ENCLOSED  
LUBRICATED MOTOR (SCH4800T)**

**VERSATILE: PERMANENT OR  
TEMPORARY INSTALLATION  
WITH OPTIONAL SUPPORT BRACKET**

### COLOURS

- **standard:** red (SCH48T models), canary yellow (SCH4800T)

### FINISH

- epoxy-polyester powdercoat

### MANUFACTURING

- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft. (2 m) 12 Awg. molded cable with 3-prong grounded, 30 A 250 V plug (except for SCH48TWBPL)
- 6 ft. (2 m) 12 Awg. molded cable for hard-wired connection (SCH48TWBPL)
- thermal protection with automatic reset

### MOTOR

- 250 CFM fan (SCH48T models)
- permanently enclosed lubricated motor and 300 CFM fan (SCH4800T)

### ELEMENT

- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

### CONTROL

- built-in thermostat with control knob protector

### INSTALLATION

- connects to a standard 30 A 250 V grounded receptacle (except for SCH48TWBPL)
- hard-wired into a wall junction box (SCH48TWBPL)
- mounting bracket that can rotate at 360° while preventing the unit from tipping

### WARRANTY

- three years (SCH4800T)
- two years (SCH48T models)

### IDEAL FOR:

construction site, garages

## ACCESSORY

PRODUCT	DESCRIPTION	PRICE
SCH-WBB	mounting bracket (models with plug)	28.25

**STELPRO**

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).





## TECHNICAL SPECIFICATIONS

PRODUCT	POWER	VOLTAGE	CONNECTION	MOUNTING BRACKET	COLOUR	WEIGHT	PRICE	
CODE	WATTS	VOLTS				KG	LB	
<b>SCH48T</b>	4800/3600	240/208	30 A 250 V PLUG	NO	RED	5.9	13	<b>122.00</b>
<b>SCH4800T</b>	4800/3600	240/208	30 A 250 V PLUG	NO	CANARY YELLOW	5.9	13	<b>166.00</b>
<b>SCH48TWB</b>	4800/3600	240/208	30 A 250 V PLUG	YES	RED	5.9	13	<b>166.00</b>
<b>SCH48TWBPL</b>	4800/3600	240/208	HARD-WIRED	YES	RED	5.9	13	<b>158.00</b>

## THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE		HEAT RISE	
		M	FT	°C	°F
<b>SCH48T</b>	4.8	5.9	19'4"	81	145
<b>SCH4800T</b>	4.8	6.4	21'	70	125

## TECHNICAL DRAWINGS

