

SLM-PUCK3-90

3-Light SlimLED™ Puck Kit
Cove, Under Cabinet & Millwork

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Puck Light

The 2 watt SlimLED puck is constructed with a steel faceplate and plastic body. The diffuser frosted lens provides for even light distribution, while maintaining low heat dispensation. The face plate is magnetically fixed on to the body and is interchangeable with optional colors. A magnetically fixed bracket ring allows the puck light to be fixed on to various surfaces.

Light Output

The SlimLED puck light is available in warm white (3000 K), providing 120 lumens per fixture, 120° beam spread.

Dimming

100%-10% dimming capability. Included driver not dimmable. Use compatible 12V dimming driver to achieve dimming functionality.

Linkability

Each fixture provided with a male and

female low voltage connector jacks for easy linking, providing a maximum linking distance of 52" between fixtures. Kit is expandable with additional fixtures (sold separately). Total wattage of fixtures attached to any driver should not exceed 80% of the total wattage designated by the driver.

Mounting

SlimLED pucks can be surface or recess mounted. For recessed mounting, back plate can be removed, and fixture attached to the surface using screws; perfect for commercial or high vibration areas. Screw heads are concealed by the magnetic faceplate.

Kit includes

- 3 SlimLED pucks
- 3 Magnetic faceplates
- 15W plug-in driver with 6' cord
- 5-Port wiring hub
- Rotary switch
- Mounting hardware

Operating Temperature


-20°C~40°C (-4°F~104°F)

SPECIFICATION	
Application	Under Cabinet
Approved Location	Damp
Beam Angle	120°
CCT	3000 K
Certification	cULus
Class II	Yes
Color	BK / BN / WH
CRI	90
Dimming	Yes
Hole Cut	Ø 2 1/4" (57mm)
Input	100-135V AC, 60Hz
Lumens	Up to 120 (per light source)
Lumens per Watt	Up to 60
Projected Life	70% @ 25,000 hrs
Warranty	3 Years
Wattage	2W (per light source)



Description

The SlimLED pucks offer smooth low profile design, flexibility and the perfect choice for accent or task lighting. Their small footprint makes them perfect for commercial, high vibration, inconspicuous areas. The ability to link multiple fixtures together makes for faster installation.

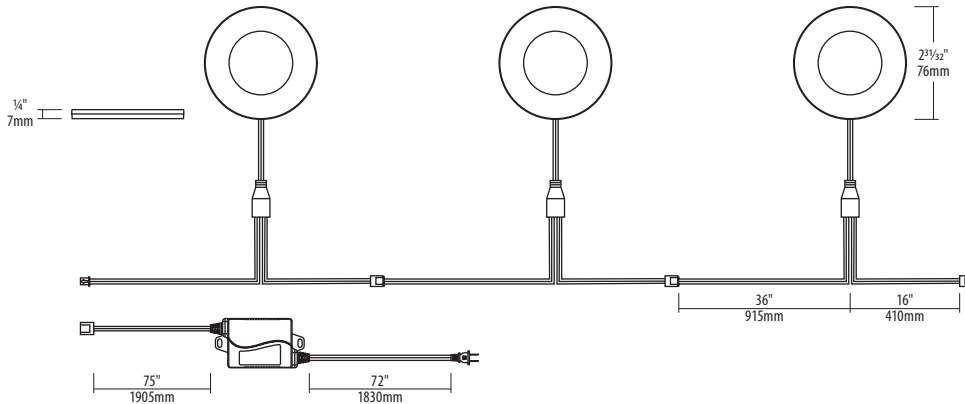

Notes: Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide

SLM-PUCK3-90	Trim Finish
	<input type="text"/>
	BK : Black
	BN : Brushed Nickel
	WH : White

Accessories



SLM-PUCK1-12D90WH
Single SlimLED puck, 2W, 12V, white.



SLM-PUCK-BK
Black magnetic faceplate and back plate. For use with SlimLED pucks.



SLM-PUCK-BN
Brushed nickel magnetic faceplate and back plate. For use with SlimLED pucks.



UC-HWS-12V
Hand wave sensor, allows for ON/OFF and dimming functionality. For use with dimmable 12V LED fixtures and drivers.



LED-TP10
12W LED in-line driver, 12V.



LED-HWB12-WH
12W LED hardwire box, 12V.



LED-DVR-DIM-12V-20W
20W LED dimmable in-line driver, 12V.



LED-HWB-DIM-12V-20W
20W LED dimmable hardwire box, 12V.



UCT-LED24
24W LED in-line driver, 12V.



LED-EL16-WH
16' Extension lead. For use with 12V DC LED fixtures.



UCP-LED-6-EL
Extension lead with bare wire. For use with 12V DC LED fixtures.