

# LUNA

## DEATH OF THE CAN LIGHT




Sitting proudly between a premium integrated LED luminaire and a budget retrofit, the LUNA Series offers the housing, trim, and lamp look without the overhead and heat! That's right - We killed the can! Available in round, square, tilting and fixed options, LUNA offers space uniformity to best suit your building's or project's needs. As the industry's first WET location rated tilting fixture, we are proud to have it part of our Quickship Program.

**NEW** to the LUNA lineup is a 2" fixed, and a 5" fixed regressed fixture, with a 5-position, selectable CCT switch option for the ultimate in on-site customization. The LUNA 3.5" fixture is now available in multiples of 2 or 3, with 6 different trim color options to suit your project needs. Commanding outputs of up to 1060 lumens for 4", and 1500 lumens for 5".



For more information please visit [Liteline.com/LUNA](http://Liteline.com/LUNA)

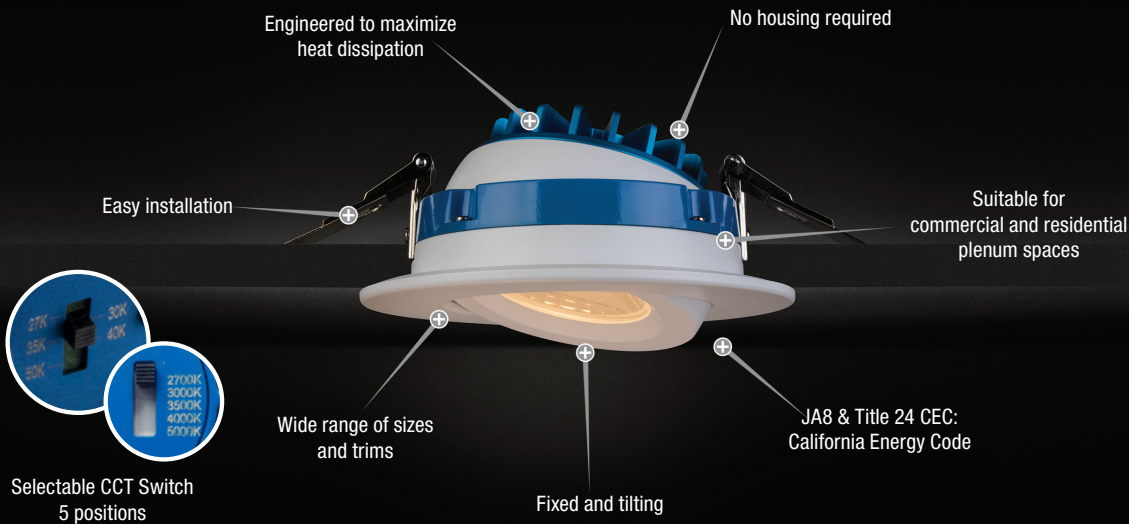

## AVAILABLE COLORS



WHITE (WH)



BLACK (BK)



BRUSHED NICKEL (BN)



SILVER (SL)



BRUSHED BRONZE (BB)



OIL RUBBED BRONZE (ORB)

| 2" FIXED  |          |   |                        |  |   |  | 3" GIMBAL            |      |                      |   |        |                      |      |                      |
|---|----------|---|------------------------|--|---|--|----------------------|------|----------------------|---|--------|----------------------|------|----------------------|
| SIZE  | WATTS    | COLOR TEMP.   | CRI                    | TRIM FINISH                            | SIZE                                      | WATTS                                    | COLOR TEMP.          | CRI  | TRIM FINISH          | SIZE  | WATTS  | COLOR TEMP.          | CRI  | TRIM FINISH          |
| ROUND: RA2  | - 7F -   | <input type="text"/>                                | - 90                   | <input type="text"/>                   | ROUND: RA3                                | - 7G -                                   | <input type="text"/> | - 90 | <input type="text"/> | ROUND: RA3  | - 7G - | <input type="text"/> | - 90 | <input type="text"/> |
| SQUARE: RA2S  | - 7F -   | <input type="text"/>                                | - 90                   | <input type="text"/>                   | SQUARE: RA3S                              | - 7G -                                   | <input type="text"/> | - 90 | <input type="text"/> | SQUARE: RA3S  | - 7G - | <input type="text"/> | - 90 | <input type="text"/> |
| : Leave blank for 27-50 switch<br>DTW : DIM TO WARM |          |   |                        |  | WH : WHITE<br>BK : BLACK<br>BN : B.NICKEL |  |                      |      |                      | 27K : 2700 K<br>30K : 3000 K<br>35K : 3500 K<br>40K : 4000 K<br>50K : 5000 K<br>DTW : DIM TO WARM |        |                      |      |                      |
| 3.5" GIMBAL   |          |   |                        |  |   |  |                      |      |                      |   |        |                      |      |                      |
| SIZE  | WATTS    | COLOR TEMP.   | DRIVER OPTIONS         | CRI                                    | TRIM FINISH                               |  |                      |      |                      |   |        |                      |      |                      |
| ROUND: RA35   | - 12G -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| SQUARE: RA35S                                       | - 12G -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| REGRESSED ROUND: RA35                               | - 12RG - | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| REGRESSED SQUARE: RA35S                             | - 12RG - | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| MULTIPLES: <input type="text"/>                     | - 12G -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| RA35M-2L :<br>2 Lights                              |          | 27K : 2700 K<br>30K : 3000 K                        |                        | Leave blank for standard 120V driver   |   | WH : WHITE<br>BK : BLACK                 |                      |      |                      |   |        |                      |      |                      |
| RA35M-3L :<br>3 Lights                              |          | 35K : 3500 K<br>40K : 4000 K<br>50K : 5000 K        |                        | L3 : Lutron Hi-Lume® 1% (3 Wire)       |   | BN : B.NICKEL<br>SL : SILVER             |                      |      |                      |   |        |                      |      |                      |
|   |          | : Leave blank for 27-50 switch<br>DTW : DIM TO WARM |                        | E : Lutron Hi-Lume® 1% (EcoSystem®)    |   | BB : B.BRONZE<br>ORB : OIL RUBBED BRONZE |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | EM : Emergency Backup, 120~277V, 0-10V |   |  |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | C : 120~347V, 0-10V                    |   |  |                      |      |                      |   |        |                      |      |                      |
| 4" GIMBAL   |          |   |                        |  |   |  |                      |      |                      |   |        |                      |      |                      |
| SIZE  | WATTS    | COLOR TEMP.   | DRIVER OPTIONS         | CRI                                    | TRIM FINISH                               |  |                      |      |                      |   |        |                      |      |                      |
| ROUND: RA4  | - 12G -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| SQUARE: RA4S  | - 12G -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| REGRESSED ROUND: RA4                                | - 12RG - | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| REGRESSED SQUARE: RA4S                              | - 12RG - | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| RA35M-2L :<br>2 Lights                              |          | 27K : 2700 K<br>30K : 3000 K                        |                        | Leave blank for standard 120V driver   |   | WH : WHITE<br>BK : BLACK                 |                      |      |                      |   |        |                      |      |                      |
| RA35M-3L :<br>3 Lights                              |          | 35K : 3500 K<br>40K : 4000 K<br>50K : 5000 K        |                        | L3 : Lutron Hi-Lume® 1% (3 Wire)       |   | BN : B.NICKEL<br>SL : SILVER             |                      |      |                      |   |        |                      |      |                      |
|   |          | : Leave blank for 27-50 switch<br>DTW : DIM TO WARM |                        | E : Lutron Hi-Lume® 1% (EcoSystem®)    |   | BB : B.BRONZE<br>ORB : OIL RUBBED BRONZE |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | EM : Emergency Backup, 120~277V, 0-10V |   |  |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | C : 120~347V, 0-10V                    |   |  |                      |      |                      |   |        |                      |      |                      |
| 5" FIXED  |          |   |                        |  |   |  |                      |      |                      |   |        |                      |      |                      |
| SIZE  | WATTS    | COLOR TEMP.   | DRIVER OPTIONS         | CRI                                    | TRIM FINISH                               |  |                      |      |                      |   |        |                      |      |                      |
| ROUND: RA5  | - 17F -  | <input type="text"/>                                | - <input type="text"/> | - 90                                   | <input type="text"/>                      |  |                      |      |                      |   |        |                      |      |                      |
| RA35M-2L :<br>2 Lights                              |          | 27K : 2700 K<br>30K : 3000 K                        |                        | Leave blank for standard 120V driver   |   | WH : WHITE<br>BK : BLACK                 |                      |      |                      |   |        |                      |      |                      |
| RA35M-3L :<br>3 Lights                              |          | 35K : 3500 K<br>40K : 4000 K<br>50K : 5000 K        |                        | L3 : Lutron Hi-Lume® 1% (3 Wire)       |   | BN : B.NICKEL<br>SL : SILVER             |                      |      |                      |   |        |                      |      |                      |
|   |          | : Leave blank for 27-50 switch<br>DTW : DIM TO WARM |                        | E : Lutron Hi-Lume® 1% (EcoSystem®)    |   | BB : B.BRONZE<br>ORB : OIL RUBBED BRONZE |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | EM : Emergency Backup, 120~277V, 0-10V |   |  |                      |      |                      |   |        |                      |      |                      |
|   |          |   |                        | C : 120~347V, 0-10V                    |   |  |                      |      |                      |   |        |                      |      |                      |