

**DALS** LIGHTING Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com


MODEL NAME

## CFLEDR14-CC


**DELTA SERIES** 

14" Round Flush Mount


Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and icludes five switch-selectable CCT settings.

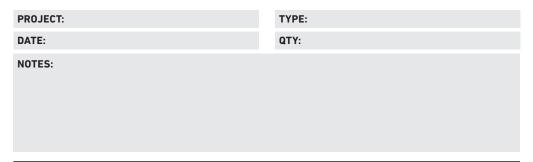





| QUICK SPECS                     |       |                      |                                  |     |         |               |                    |                                                                |
|---------------------------------|-------|----------------------|----------------------------------|-----|---------|---------------|--------------------|----------------------------------------------------------------|
| SIZE                            | WATTS | DELIVERED<br>LUMENS* | COLOR °T<br>5CCT                 | CRI | VOLTAGE | BEAM<br>ANGLE | LIGHT<br>DIRECTION | FINISH                                                         |
| 14"                             | 26W   | 1600lm               | 2700K<br>3000K<br>3500K<br>4000K | 90  | 120V    | 110°          | Straight           | <ul><li>White</li><li>■ Black</li><li>■ Satin nickel</li></ul> |
| *Lumen output measured at 3000K |       |                      | 5000K                            |     |         |               |                    | Gold                                                           |



| CONSTRUCTION | Lens<br>Frosted<br>Lens material<br>PC                                | Finish type Paint (BK, WH) Electroplate (SN, BB)  Housing material Cast aluminum | Type of LED Edge lit SMD  Mounting Twist bracket    |
|--------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------|
| RATINGS      | Placement Indoor/outdoor  Location Wet (Covered ceiling mounted only) | Lifespan<br>50,000 hrs.<br>Certifications<br>ETL, JA8, FCC, ES                   | IP rating IP44  Operating temperature -20° to 40° C |

## **WHAT'S IN THE BOX**

LED flush mount fixture Mounting bracket Mounting hardware Wire nuts Instruction sheet

ACCESSORIES

| ADAPTERS | • |  |  |
|----------|---|--|--|
| -        |   |  |  |
|          |   |  |  |
|          |   |  |  |
|          |   |  |  |
|          |   |  |  |



80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

4383, NW 124th Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com

**ELECTRICAL DETAILS** 

Input voltage 108-120V

**Output current** 206mA

**Power factor** 90%

**Driver type** Constant current

**Output voltage** 

126V

LED model # 2835

**THD** harmonic distortion <30%

**Binning type** 3 SDCM

**FEATURES** 

Integrated dimmable

driver

Smooth 360° wide spread

Switch-selectable CCT: 2700K/ 3000 K/ 3500 K/ 4000 K/ 5000 K

Superior LED

performance and lifespan

Minimal heat emission Edge-lit technology

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

| RECOMMENDED DIMMER LIST* |                       |                                    |            |   |                  |             |  |
|--------------------------|-----------------------|------------------------------------|------------|---|------------------|-------------|--|
| BRAND                    | MODEL#                | DIMMER SPECS                       | GRADE      |   | RANGE (%)<br>MAX | MAX<br>LOAD |  |
| Dals                     | SM-DIMSW Smart Dimmer | Triac, 250W LED/CFL                | Compatible | 0 | 100              | 250         |  |
| Lutron                   | DVCL-153PR-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Lutron                   | CTCL-153PDH-WH-C      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Lutron                   | STCL-153PH-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 94               | 150         |  |
| Lutron                   | DVWCL-153PH-WHC       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Lutron                   | DVELV-300P-WH         | 300W electronic low voltage dimmer | Compatible | 0 | 63               | 300         |  |
| Lutron                   | MA-PRO-WH             | ELV, 250W LED/CFL                  | Compatible | 0 | 93               | 250         |  |
| Lutron                   | Caseta PD-5NE-WH-C    | ELV, LED—up to 250 W               | Compatible | 0 | 100              | 250         |  |
| Leviton                  | 6674                  | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Leviton                  | IPL06-10Z             | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Leviton                  | DSL06-752             | Triac, 150 W Dimmable CFL/LED      | Compatible | 0 | 100              | 150         |  |
| Leviton                  | D26HD-742-1RW         | Triac, 300W LED/CFL                | Compatible | 0 | 100              | 300         |  |
| Legrand                  | RHL373PW              | Triac, 250W LED                    | Compatible | 0 | 92               | 250         |  |
| Control 4                | C4-APD120-WH          | ELV, 120W LED                      | Compatible | 0 | 100              | 120         |  |
| Control 4                | C4-FPD120-WH          | Triac, 200W LED                    | Compatible | 0 | 100              | 200         |  |

<sup>\*</sup> Minimal buzzing noise may occur with some dimmers