



dimable LED FluoroBar™



Thin, sleek and easy to install, Liteline's LED FluoroBar is the perfect choice for all your task lighting applications.


- 6 Lengths to choose from 9" to 58"
- Built in On/Off switch
- No shadow linking connector
- Link up to 10 fixtures
- Dimmable with Triac, ELV and incandescent dimmers
- Can be hardwired
- 3000°K, 4000°K or 5000°K colour temperatures
- Power feed and hardwire box sold separately.



Features

EXPANDABLE: Maximum link of 10 fixtures

120V

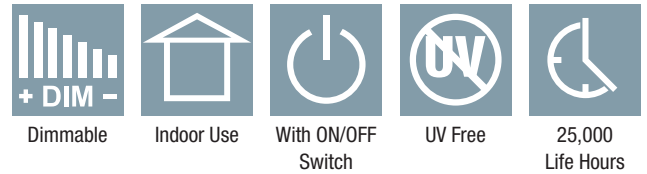


Length Options

9" 229mm 3W	13-1/2" 344mm 5W	22-5/8" 575mm 9W	34-1/2" 876mm 14W	46-1/4" 1175mm 18W	58" 1473mm 22W
-------------------	------------------------	------------------------	-------------------------	--------------------------	----------------------

Colour Temperature Options



Linking

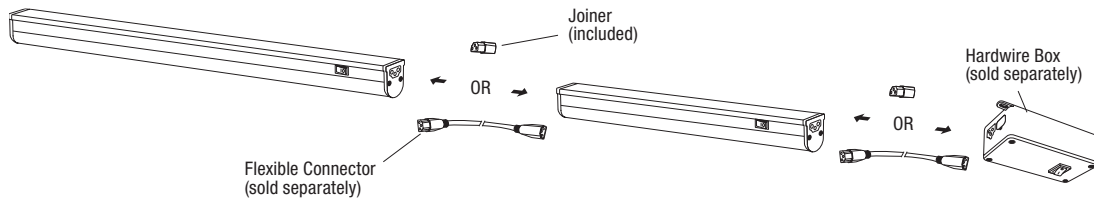

Ordering Guide

Part #	Description	UPC	Case Qty.	Master Qty.
LED FluoroBars - Warm White				
LEDBAR9-30K	9", 3W, 3000°K / Warm White, 260 Lumens	771250973313	6	24
LEDBAR14-30K	13-1/2", 5W, 3000°K / Warm White, 420 Lumens	771250971562	6	24
LEDBAR23-30K	22-5/8", 9W, 3000°K / Warm White, 760 Lumens	771250971579	6	24
LEDBAR34-30K	34-1/2", 14W, 3000°K / Warm White, 1120 Lumens	771250971586	6	24
LEDBAR46-30K	46-1/4", 18W, 3000°K / Warm White, 1530 Lumens	771250971593	6	24
LEDBAR58-30K	58", 22W, 3000°K / Warm White, 1900 Lumens	771250971555	6	24
LED FluoroBars - Neutral White				
LEDBAR9-40K	9", 3W, 4000°K / Neutral White, 260 Lumens	771250973320	6	24
LEDBAR14-40K	13-1/2", 5W, 4000°K / Neutral White, 440 Lumens	771250973337	6	24
LEDBAR23-40K	23-5/8", 9W, 4000°K / Neutral White, 880 Lumens	771250973344	6	24
LEDBAR34-40K	34-1/2", 14W, 4000°K / Neutral White, 1240 Lumens	771250973351	6	24
LEDBAR46-40K	46-1/4", 18W, 4000°K / Neutral White, 1650 Lumens	771250973368	6	24
LEDBAR58-40K	58", 22W, 4000°K / Neutral White, 2000 Lumens	771250973375	6	24



Liteline Corporation
 Info@liteline.com
 www.liteline.com

8 Abacus Road, Brampton
 Ontario, Canada L6T 5B7



416-996-1856
 1-866-730-7704



905-794-1990
 1-888-738-9736

Part #	Description	UPC	Case Qty.	Master Qty.
LED FluoroBars - Cool White				
LEDBAR9-50K	9", 3W, 5000°K / Cool White, 280 Lumens	771250973320	6	24
LEDBAR14-50K	13-1/2", 5W, 5000°K / Cool White, 460 Lumens	771250973337	6	24
LEDBAR23-50K	23-5/8", 9W, 5000°K / Cool White, 1000 Lumens	771250973344	6	24
LEDBAR34-50K	34-1/2", 14W, 5000°K / Cool White, 1360 Lumens	771250973351	6	24
LEDBAR46-50K	46-1/4", 18W, 5000°K / Cool White, 1770 Lumens	771250973368	6	24
LEDBAR58-50K	58", 22W, 5000°K / Cool White, 2100 Lumens	771250973375	6	24
Accessories				
Power Cord				
ALFT6000-WH-3	6' Power cord	771250913951	6	24
ALFT6000S-WH-3	6' Power cord with On/Off switch	771250915726	6	24
ALFT6016-WH-3	16" Power cord	771250935335	6	24
Power Cord with 90° connector				
ALFT60901-WH-3	6" Flexible 3-wire power cord with 90° connectors (top connection)	771250917461	6	24
ALFT60902-WH-3	6" Flexible 3-wire power cord with 90° connectors (left connection)	771250917478	6	24
ALFT60903-WH-3	6" Flexible 3-wire power cord with 90° connectors (bottom connection)	771250917485	6	24
ALFT60904-WH-3	6" Flexible 3-wire power cord with 90° connectors (right connection)	771250917492	6	24
Power Cord with 90° connector and switch				
ALFT90P-WH-3	6' Power cord with On/Off switch	771250916617	6	24
Hardwire box				
ALFT6300-WH	Hardwire box with On/Off switch	771250913944	6	24
Cord with 90° connector				
ALFT901-WH-3	6" Flexible 3-wire cord with 90° connectors (left connection)	771250917508	6	24
ALFT902-WH-3	6" Flexible 3-wire cord with 90° connectors (bottom connection)	771250917515	6	24
ALFT903-WH-3	6" Flexible 3-wire cord with 90° connectors (right connection)	771250917522	6	24
ALFT90-WH-3	6" Flexible 3-wire cord with 90° connectors (top connection)	771250915788	6	24
Flexible Connector				
FBT6106-WH-3	6" Flexible connector	771250913906	6	24
FBT6100-WH-3	12" Flexible connector	771250913913	6	24
FBT6124-WH-3	24" Flexible connector	771250913920	6	24
FBT6136-WH-3	36" Flexible connector	771250913937	6	24
FBT6124-BL-WH-3	Power feed with bare lead	771250000361	6	24