

Chair Installation Guide



- When positioning the chair, please leave 31.5" of space behind the backrest to allow free reclining of the backrest.
- DO NOT connect to power when installing the chair.

Step 1: Remove the following contents from two cartons:

- The chair
- The side panels

Step 2: Install the side panels.

- Take out two side panels from the carton, then you can find two screw holes and two fixing lugs on each side panel.

The two screw holes

The two fixing lugs



- Take out the chair without the backrest from the carton, then you can find a cross bar on each side of the chair.

The position of the cross bar
(one cross bar on each side)



- Insert the side panels to the chair at 90 degrees by inserting the two **fixing lugs** into the **cross bar** completely.



The position of the **cross bar**



The position of the **fixing lugs**

- Then connect the connectors of air hoses from the side panels and the air hoses under the seat pad, which the air hoses are marked with "Green" circle bands.



Before connecting



After connecting

- Use the cable tie to unfasten the seat pad from the chair by the zipper, then lift up the seat pad.



- After you lift up the seat pad, you can find two screw holes in front of the two side panels and the other two screw hoses at the back of the two side boards.

Front screws: Place them through the seat-side frame into the side boards in line, and use the inner hexagonal wrench to fasten and fix the screws.

Back screws: Place them into the side boards directly, and use the inner hexagonal wrench to fasten and fix the screws.

Front screws




Back screws



- Put down the seat pad and zip the seat pad using the cable tie.
- Take off or cut down the cable tie which binds the fastener of the seat pad.

Step 3: Install the Backrest.

- Use the diagonal pliers to cut off the cable tie which binds the stopper of the backrest and take down the packing material of the backrest actuator, where both of them are located underneath the seat pad.



- Lift the backrest, then lower the backrest into the seat brackets, lock the flat head bolts securely into sides of the seat.

Note: Carefully unwrap the armrest to avoid scratching during installation.

2 people are required to attach the backrest to the chair. Please do not attempt to do it by yourself.



- Attach the air hose connectors on the backrest.
Note: 2 people are required to attach the air hoses connectors on the backrest, one person steadies the backrest and to avoid it fall down, the other person to connect the connectors.

- Take out the backrest from the carton and remove all packing materials, then you can find two connectors of air hoses at the bottom of the backrest, and also find two connectors of air hoses sticking out from the seat part, which the air hoses are marked with "Red" circle bands.




- Pull out the stopples from the hoses of the backrest, which protects the hose.





- Connect the air hoses of the backrest to the connectors sticking out from the chair.

After connecting



- Attach the connecting rod and the u stay fork of the reclining actuator with the flat head rivet, and secure with a split pin as demonstrated in PIC 1 and PIC 2.

- A. Connecting rod (on the backrest)
- B. U stay fork of reclining actuator (on the seat)
- C. Flat head rivet
- D. Split pin

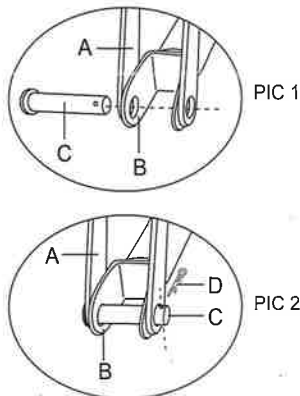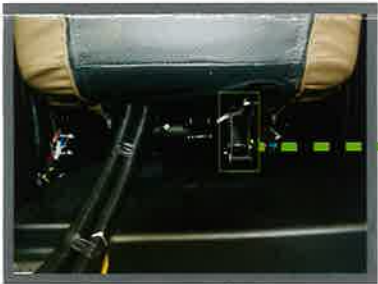

- Take down the packing material of the plugs, then connect the plugs to the corresponding place in the seat according to the marks given.
Note: Insert **black to black** and **gray to gray**, otherwise damage to the chair may result.



Step 5: Attach the backrest pad and the pillow pad.





Attach the backrest pad

Attach the pillow pad

Step 6: Connect the wire plugs.



Step 7: Fix the remote controller to the holder by securing the screws.

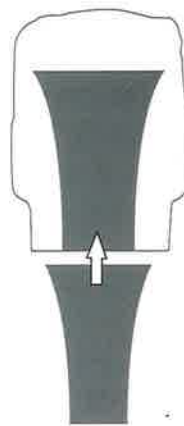

The back massage strength-control pad has been inserted into the backseat cover. If strong massage is desired, remove the back massage strength-control pad from the cover; this strengthens the massage. If milder massage are desired, insert the back massage strength-control pad into the cover; this lessens the strength of the massage.

Step 4: Unfold the backrest until you hear "click" sound.

