

# PRODUCT DATA SHEET



## PRODUCT - DATA


SF7801/IR, SF7801/IL  
 Inside threaded terminal (right hand thread),  
 Inside threaded terminal (left hand thread)

### SF7801/IR, SF7801/IL

**Technical Data**

Casting material : AISI316 - DIN 1.4401  
 Surface treatment : "M.F." (Matte finished)

Note : Standard safety factor for working load is 1/4 of breaking load.

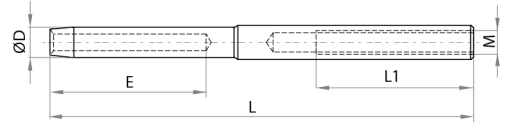

SF7801/IR  
 Inside threaded terminal (right hand thread)  
 SF7801/IL  
 Inside threaded terminal (left hand thread)

SF7801/IR SS316	SIZE M (mm)	ØD (mm)	ØD (inch)	E (mm)	E (inch)	L (mm)	L (inch)	L1 (mm)	L1 (inch)	Dia Ø Cable (mm)	Unit weight (kgs)	Unit weight (lb)	B.L. (kgs)	B.L. (lb)
6780-1382	M5	5.50	0.22	25	0.98	65	2.56	20	0.79	3	0.01	0.02	600	1,320
6780-1383	M6	6.35	0.25	25	0.98	65	2.56	20	0.79	4	0.01	0.02	1,000	2,200
6780-1384	M6	7.50	0.30	30	1.18	70	2.76	20	0.79	5	0.02	0.04	1,400	3,080
6780-1385	M8	9.00	0.35	40	1.57	85	3.35	25	0.98	6	0.03	0.07	2,200	4,840

SF7801/IL SS316	SIZE M (mm)	ØD (mm)	ØD (inch)	E (mm)	E (inch)	L (mm)	L (inch)	L1 (mm)	L1 (inch)	Dia Ø Cable (mm)	Unit weight (kgs)	Unit weight (lb)	B.L. (kgs)	B.L. (lb)
6780-1387	M5	5.50	0.22	25	0.98	65	2.56	20	0.79	3	0.01	0.02	600	1,320
6780-1388	M6	6.35	0.25	25	0.98	65	2.56	20	0.79	4	0.01	0.02	1,000	2,200
6780-1389	M6	7.50	0.30	30	1.18	70	2.76	20	0.79	5	0.02	0.04	1,400	3,080
6780-1390	M8	9.00	0.35	40	1.57	85	3.35	25	0.98	6	0.03	0.07	2,200	4,840

CODE: SF7801/IR, SF7801/IL

KINZI DATA SHEET

**100%  
 RECYCLABLE**

**WWW.KINZI.COM**