

# PRODUCT DATA SHEET



## PRODUCT - DATA

**SF880**  
S-hook (type 3)

### SF880


#### Technical Data

Forging material : AISI304 - DIN 1.4301  
Production : SF880 - Hook - Forged  
Surface treatment : "E.P." (Electro polished)

Note : Standard safety factor for working load is 1/4 of breaking load



**SF880**  
S-hook (type 3)

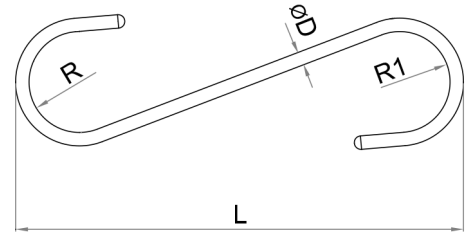

| SF880<br>SS304 | SIZE        | ØD<br>(mm) | ØD<br>(inch) | L<br>(mm) | L<br>(inch) | R<br>(mm) | R<br>(inch) | R1<br>(mm) | R1<br>(inch) | Unit<br>weight<br>(kgs) | Unit<br>weight<br>(lb) | B.L.<br>(kgs) | B.L.<br>(lb) |
|----------------|-------------|------------|--------------|-----------|-------------|-----------|-------------|------------|--------------|-------------------------|------------------------|---------------|--------------|
| 4880-6080      | <b>6080</b> | 6          | 0.24         | 80        | 3.15        | 12.5      | 0.49        | 12.5       | 0.49         | 0.04                    | 0.09                   | 150           | 330          |
| 4880-6120      | <b>6120</b> | 6          | 0.24         | 120       | 4.72        | 17.5      | 0.69        | 17.5       | 0.69         | 0.05                    | 0.11                   | 100           | 220          |
| 4880-6160      | <b>6160</b> | 6          | 0.24         | 160       | 6.30        | 22.5      | 0.89        | 22.5       | 0.89         | 0.07                    | 0.15                   | 90            | 198          |
| 4880-6200      | <b>6200</b> | 6          | 0.24         | 200       | 7.87        | 22.5      | 0.89        | 22.5       | 0.89         | 0.08                    | 0.18                   | 80            | 176          |
| 4880-6240      | <b>6240</b> | 6          | 0.24         | 240       | 9.45        | 22.5      | 0.89        | 22.5       | 0.89         | 0.09                    | 0.20                   | 80            | 176          |

CODE: SF880

KINZI DATA SHEET

**100%**  
**RECYCLABLE**

[WWW.KINZI.COM](http://WWW.KINZI.COM)