



Instruction Manual

9ft Jib Arm with Tripod
(P-9-TS)



All rights reserved

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the publisher.

Introduction

Proaim presents its 9ft Jib Crane that allows execution of high level professional shots while still keeping the crowd and crew safe. The High-Quality CNC constructed 9ft jib arm is sturdy yet lightweight. It easily breaks down to parts for compact storage. Experience pro style fluid movement with precision and lot more flexibility that lets you grab your viewers' attention like never before.

What's In The Box

Please inspect the contents of your shipped package to ensure you have received all that is listed below.

CONTENTS OF SHIPPING BOX:

- Front section (3.75ft)
- End section (3.75ft)
- Support bar with handle
- Central Post
- Jib Stand
- Weight Shank
- Weight Closer
- Tools Pouch
- Packing Bag

PACKED IN AN EASY CARRY, PROTECTIVE TOTE BAG



Front section



End sections



Support bar with handle



LCD Mounting Arm



Weight shank



Weight closer



Tool pouch



Central Post



Jib Stand

JIB STAND SETUP

For stability and mounting of your 9' Jib Arm on the stand, remove the stand from the case and proceed as follows:

- Loosen the lower knob located at the top of the spreader legs.
- Slide the legs down the center post to the widest possible position and tighten the knob 1 to secure. A wider spread ensures more stability.
- Draw the center post up to the desired jib height and lock into place using the provided locking pin.




ASSEMBLING THE JIB ARM

- Slide the central post of the jib onto the stand mount and secure it with the provided knob.





- Attach the End section of Jib with the Central Post.
- Using a wrench, tighten the dome nut from both sides to secure the two sections.

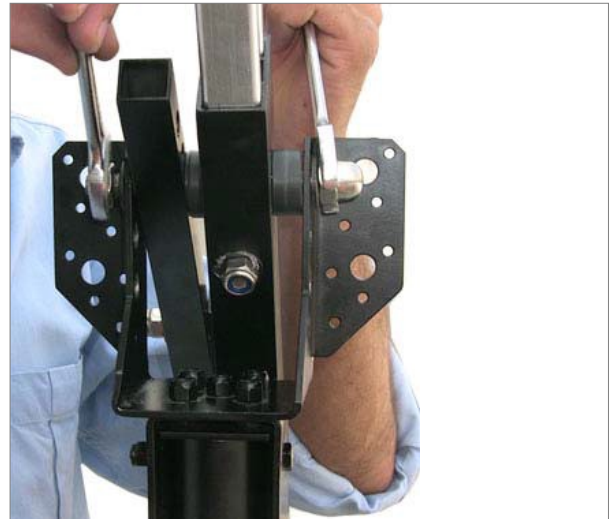

CONNECTING FRONT SECTION TO END SECTION

- The front section has connecting bars attached to one end as shown. Slide in the end section and the support bar with handle into the slots on front section. Tighten the two sections together using the supplied Allen Key.
- Tighten the Allen keys as before to secure the sections. Your arm build is now complete.

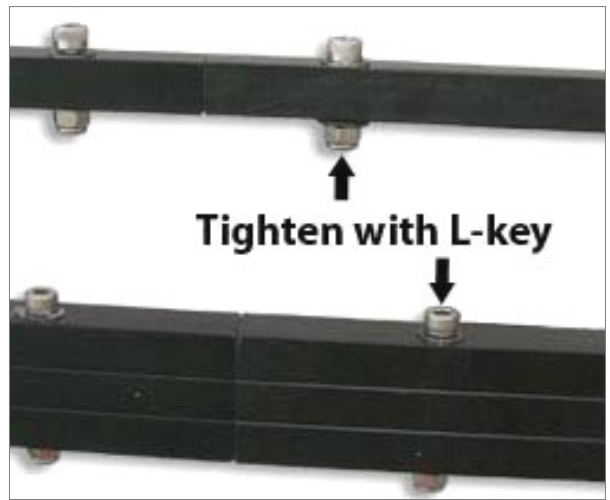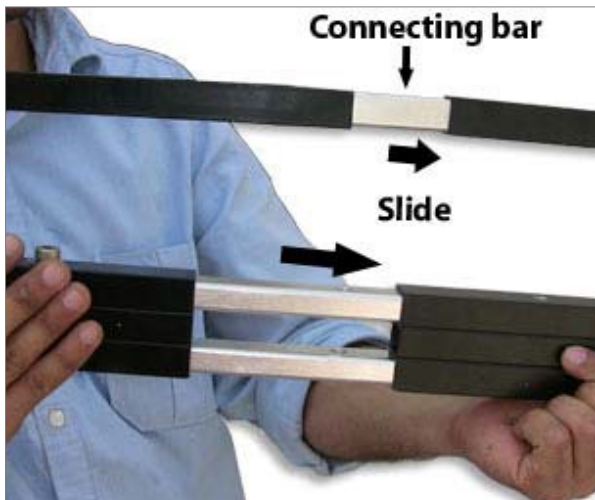

ADDING THE COUNTER WEIGHTS

- Securing the counter weights to the Jib is accomplished by the use of the stainless steel shank. It has two lock offs, one for each side of the arm to prevent the weights from shifting during use or accidentally falling off the jib.
- Standard exercise weights (not supplied) with a 1" hole are easily mountable and are used to equal the weight placed on the camera side of the Jib.

- Once you discover correct balance, consider marking the weights for that particular camera facilitating an easier set up the next time.

NOTE: *You will need to fine turn your counterweights to accommodate camera, head and other accessories being used on the jib arm.*




CAMERA MOUNTING PLATE

- To accommodate various manufacturers and different sized cameras, multiple slots are provided for attachment.




MOUNTING THE PAN / TILT HEAD

- The pan tilt can be easily mounted on the jib by tightening the 4 screw located at the corners of the plate.
- This assembly is usually accomplished from the underside (bottom) of the jib camera plate.

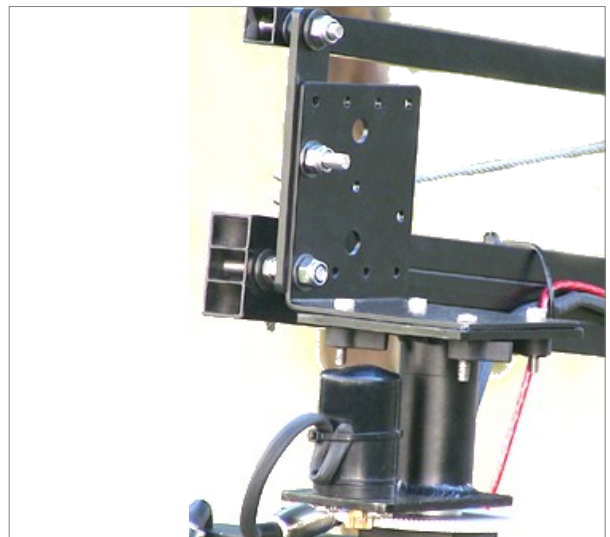

PIN FEATURE FOR TILTING SHOTS

- Removing the locking pin on the Center Post allows the operator to frame tilting shots by the use of control handle.

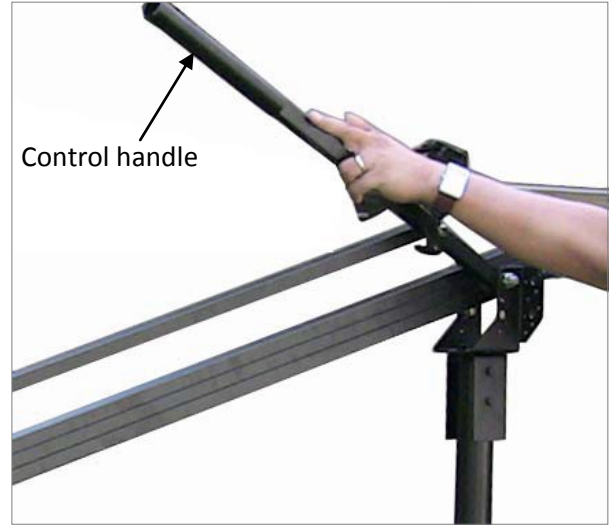

- Lock the pin for keeping your camera in a fixed angle to take stable shots.



MOUNTING THE MONITOR

- Attach the LCD mounting arm with the provision on central post to attach the LCD monitor **(NOT INCLUDED)**.



YOUR PROAIM 9' JIB WITH STAND ALL DRESSED UP AND READY TO GO



(SHOWN WITH OPTIONAL ACCESSORIES)

WARRANTY

We offer a one year warranty for our products from the date of purchase.

We will repair or replace your product, free of charge, in the event of a defect in materials or craftsmanship obtained during normal use or handling based on the user manual. Please note that we will not cover any shipping costs for returning the product to us. If any VAT or import duties are applied to the return, we will also charge these costs to the customer.

The warranty does not include, by the way of example, damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product , or service by anyone other than our company.

We are not liable for incidental or consequential damages resulting from the use of the unit or occurring due to any breach of this warranty.

Replacement parts of the product will be provided at nominal cost (covering the cost price of the replacement parts only) to the customers after the Warranty Period has expired. We will cover the complete cost of sending replacement parts within the warranty period. After that, Nominal cost of the product & Actual shipping cost will be charged.

Do not send the unit to us without first getting a response and getting the approval to send back the item.

In case of any kind of dissatisfaction, we urge you to **Contact us** immediately and we shall do our Best to help you out. For any other assistance you can reach us via email.

For any other assistance you can reach us via email.