



# lilitab Floor Basic Mount

Assembly Instructions

v4.0

## TABLE OF CONTENTS

Assembly Preparation and Packing List . . . . .	3
Features . . . . .	4
Assembly Instructions . . . . .	5
Bolt Down Installation . . . . .	6

**GOT QUESTIONS? WE'RE HERE TO HELP!**

**EMAIL** [support@lilitab.com](mailto:support@lilitab.com)    **PHONE** 888.705.0190

## MOUNT ASSEMBLY PREPARATION

### FOR BASE PLATE INSTALLATION, YOU'LL NEED:

- ✓ Phillips screwdriver

### FOR BOLT DOWN INSTALLATION, YOU'LL NEED:


- ✓ Powered drill/driver, preferably with impact action
- ✓ Socket wrench with a neck of at least 5", this may require a socket extension
- ✓ 2 x bolts, wood screws or other fastener suitable for your floor's substrate (m6, no.14 or 1/4" diameter)

### TO SECURE YOUR LILITAB YOU WILL NEED:

- ✓ Kensington compatible cable lock

## PACKING LIST

### INCLUDED

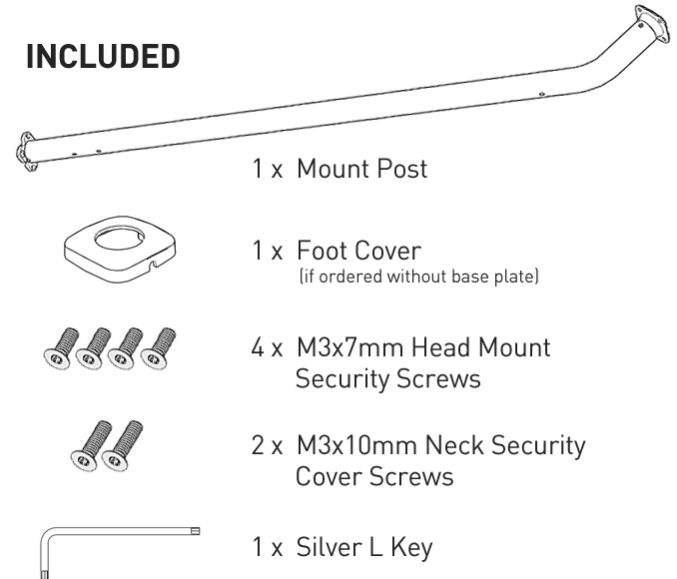

1 x Mount Post

1 x Foot Cover  
(if ordered without base plate)

4 x M3x7mm Head Mount  
Security Screws


2 x M3x10mm Neck Security  
Cover Screws

1 x Silver L Key

### INCLUDED IF YOU ORDERED BASE PLATE



1 x Base Plate



1 x Base Housing and Cover



2 x M6x12mm Base Screws  
short





2 x M6x14mm Base Screws  
long



2 x M3x6mm Base Security Screws

# FEATURES

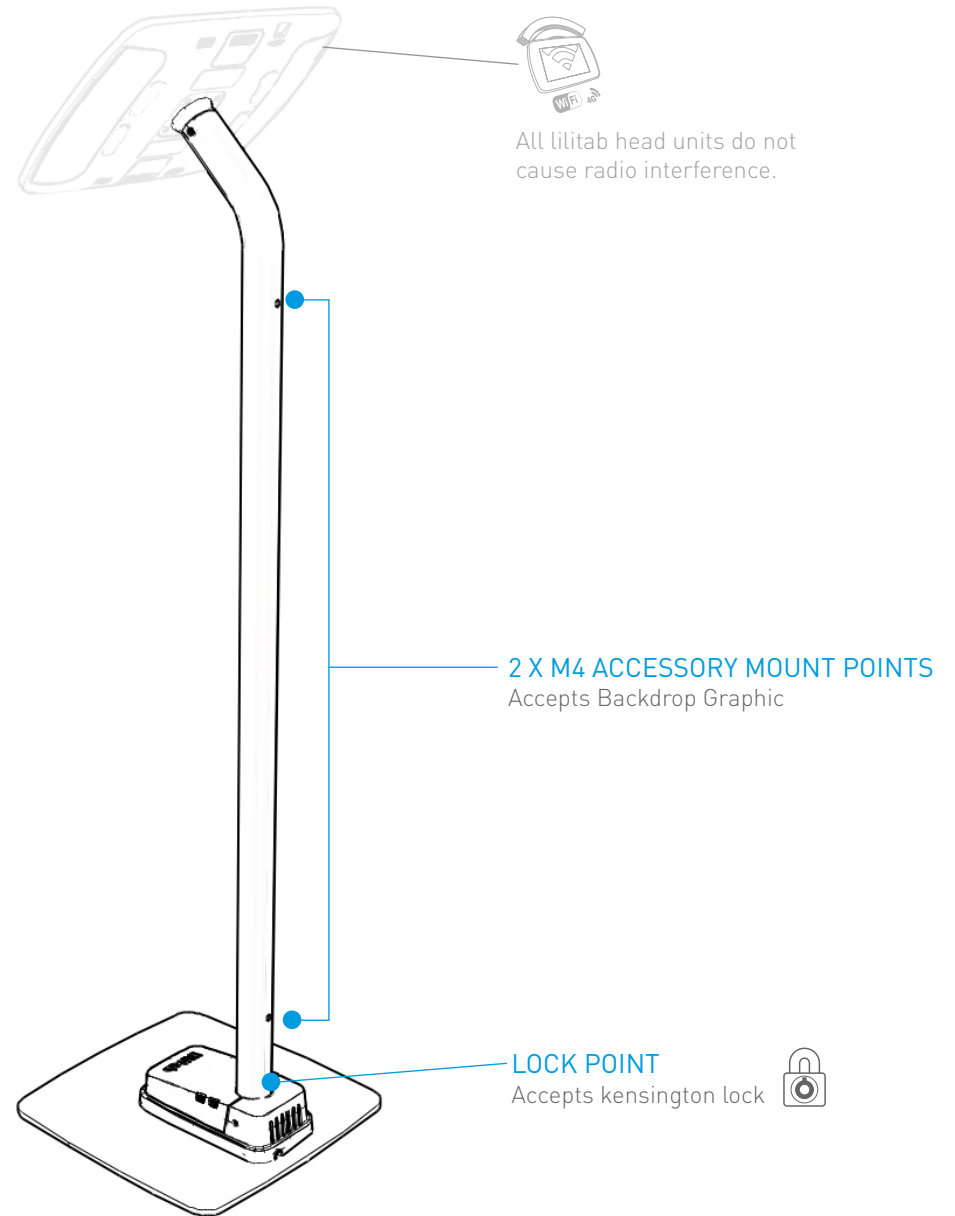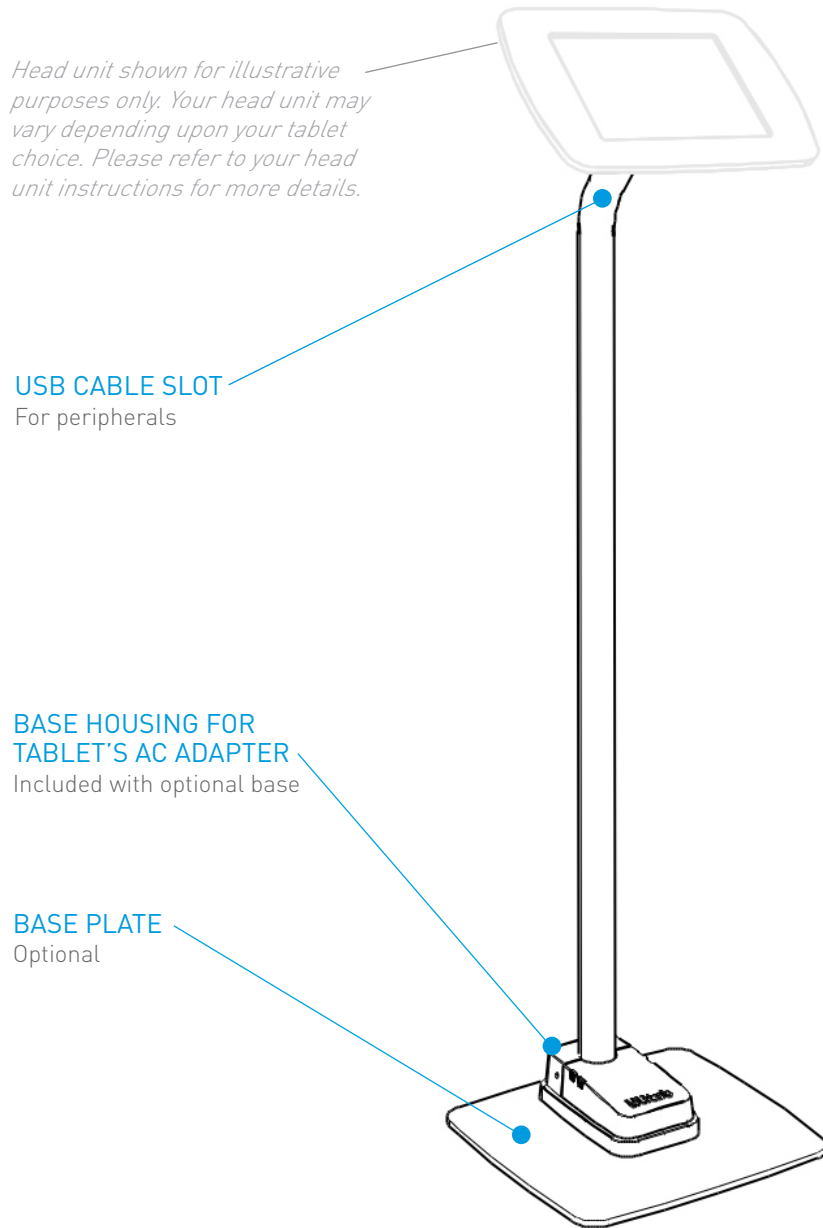

# ASSEMBLY INSTRUCTIONS




- 1. Thread the charge and sync cable** that came with your tablet through the top of the lilitab mount. Insert the pole mount into the base housing on an angle to clear the welded flange, as pictured.



- 4. Attach base housing:**

1. Attach the base housing cover by sliding it into place.
2. Secure the base cover using the **two (2) M3x6mm base security screws** and **silver L key**.



- 2. Attach base plate.** Line up the bottom of the lilitab mount with the four screw holes. Using the **two (2) M6x12mm short base screws**, secure through the welded flange's two rear-most openings closest to the cable egress slot.



**NOTE:** You will need to hold the base housing up and out of your way while bolting.



- 5. You will attach your head unit** using the **four (4) M3x7mm head mount security screws** and **silver L key**.




Refer to your lilitab Head owner's manual for tablet installation instructions.



- 3. Connect and position cables:**


1. Connect the USB cable to the tablet's AC adapter. Then connect the adapter to your extension cord.
2. Position both cables underneath the base housing's two plastic tabs. The extension cord should exit the rear of the housing.
3. Screw down the base housing using the **two (2) M6x14mm long base screws**.




(iPad AC adapter shown with optional apple power extension cord. Your AC adapter will vary depending upon your tablet type.)




- 6. Install security cover.** After you attached your head unit, install the security cover using the **two (2) M3x10mm security cover screws** and **silver L key**.



## BOLT DOWN INSTALLATION

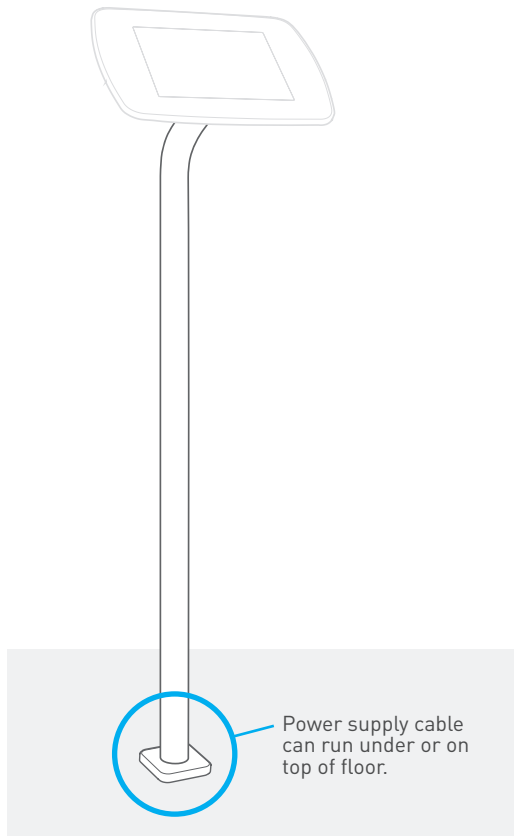

The lilitab Floor Basic can be mounted directly to any hard floor surface using 2 x bolts, wood screws or other fastener suitable for your floor's substrate (M6, no.14 or 1/4" diameter). Use the mounting pattern to the right for proper alignment.

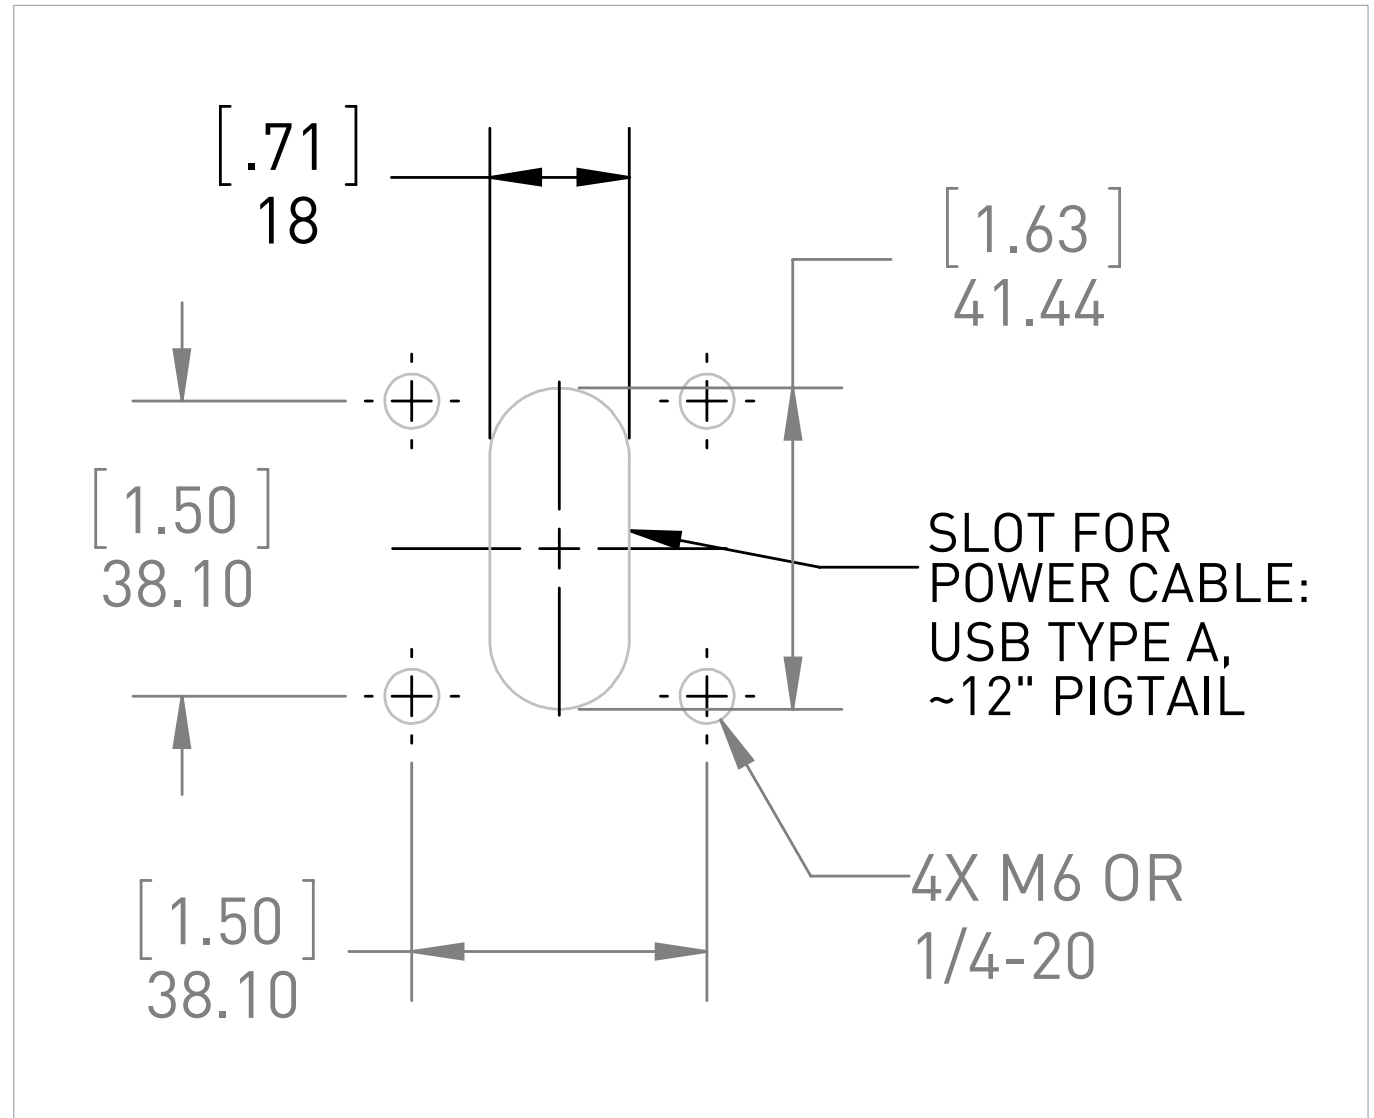

Mounting pattern