

## A Reliable Power Solution Provider

# Lithium Iron Phosphate (LiFePO4) Battery

## **TN-LFP12.8V54AH**

#### Features

- Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions
- Built-in automatic protection for over-charge, over discharge, over current and over temperature
- Maintenance free
- Internal cell balancing
- ♦ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- Can be charged using most standard lead-acid charges (set)
- ◆ Wider temperature range:-20 ℃~60 ℃


### **Application**

- ♦ UPS
- Solar &Wind power system

**General Specifications** 

- ♦ Golf Cart
- Electric vehicle, E-bike, E-rickshaw e.g.
- ♦ Lighting



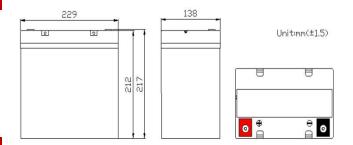

#### Nominal Voltage 12.8V **Nominal Capacity** 54Ah@0.2C 691.2Wh Energy Electrical Internal Resistance 50≤mΩ Characteristics Cycle Life >2000 Cycles @ 0.2C Charge/Discharge at 100%DOD,End of Life 70% Capacity. Months Self Discharge ≤3.5% per month at 25℃ 14.6±0.2V Charge Voltage At 0℃~45℃ temperature, charged to 14.6V at a constant current of 0.2C5A, and Charge Mode (CC/CV) then, changed continuously with constant voltage of 14.6V until the current was not Standard Charge more than 0.02C5A **Charger Current** 10.8A 27A Max.Charge Current 10.8A Discharge Current Max. Continuous Current 54A Standard Discharge Max.Pulse Current 120A(<3S) Disxcharge Cut-off Voltage 10.0V Charge Temperature 0° to 45° (32° to 113°) @60±25% Relative Humidity Disxcharge Temperature -20℃ to 60℃(-4೯ to 140೯) @60±25% Relative Humidity Environmental 0℃ to 45℃(32೯ to 113೯) @60±25% Relative Humidity Storage Temperature Water Dust Resistance IP55 Cell & Method IFR32700 N60,4S9P Plastic Case ABS Dimension(L\*W\*H\*TH) 229\*138\*212\*217mm Mechanical Weight 6.7Kg Approx.

#### Tianneng Battery Group Co.,Ltd


18 Baoqiao Road, Huaxi Industrial Function Zone, Zhejiang, China 313100

Terminal


M6

# Lithium Iron Phosphate (LiFePO4) Battery


### **TN-LFP12.8V54AH**

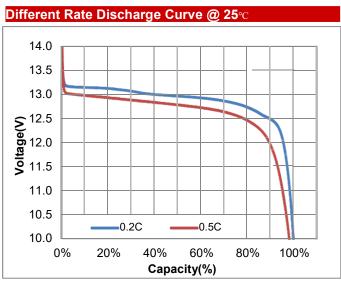


## Different Temperature Discharge Curve @0.5C. 25%

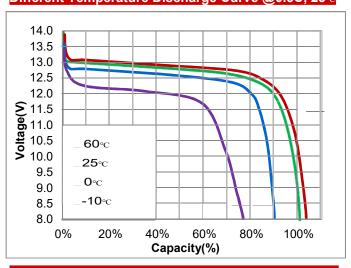


### Different DOD Discharge Cycle Life Curve@0.5C, 25

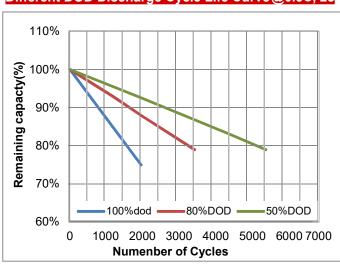


### Charge Characteristics @0.2C&0.5C, 25℃

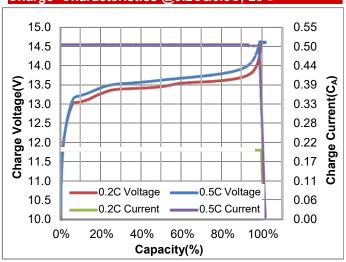

### Charge Characteristics @0.2C&0.5C, 25℃

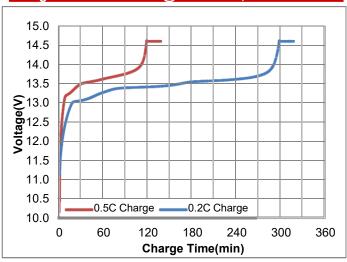

### Open circuit voltage VS SOC%

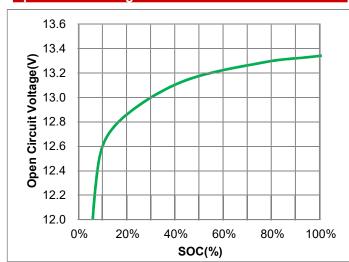

**Tianneng Battery Group Co.,Ltd**