



## Yuasa Technical Data Sheet

### Yuasa YBX3056 - YBX3000 SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 36Ah |
| Cold Cranking Amps (EN1) | 330A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 187mm |
| Width  | 135mm |
| Height | 227mm |

#### Weights & Measures

|                       |       |
|-----------------------|-------|
| Mean Weight with Acid | 9.3kg |
|-----------------------|-------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS B19 + B1   |
| Hold Down                 | B1             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |


#### Technology

|                           |             |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓           |
| Separator                 | Ca/Ca       |
| VDA Roll Over Test        | PE          |
| Recommended Charge Rate   | ✓           |
| Performance Marking       | 3A          |
|                           | W3-C2-V2-E1 |


#### Terminal Type

##### T1/T3


Standard DIN Post




Remove T1 adapter for T3



#### Cell Assembly Layout

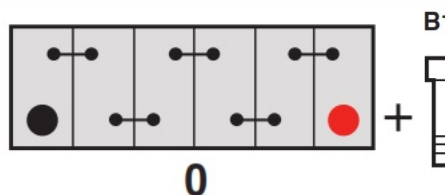

#### Battery Hold-down

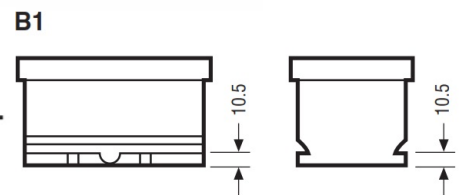

Data Sheet generated on 25/02/2020 - E&OE