

ADVANTAGES


- » Designed to replace 250W and 400W HID Highbays
- » Sealed die-casting profile for indoor and outdoor applications
- » Voltage is 120-277V or 347-480V, 0-10V Dimming is standard
- » Lumen output from 13000 to 25000lm with efficacy up to 146lm/W
- » Increase energy savings with bi-level Motion Sensor
- » Operating temperature is 40°C to 55°C (40°F to 131°F)
- » Hook and pendant mount options available
- » UL/cUL listed and DLC premium qualified
- » 50,000 Hour L70 Lifetime, 5-Year Warranty Guarantee

Project: _____
 Location: _____
 Cat. No: _____
 Type _____
 Qty: _____
 Notes: _____




PHOTOMETRICS

General



unit: inch/mm

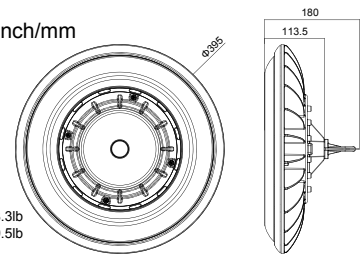

Weight:
 100W: 8.3lb
 180W: 9.5lb

ORDER MATRIX

Example: M-BAYLED-140W-UNV-D-50K-WT-MS

Family	Wattage	Voltage	Dimming	Color Temp	Finish	Motion Sensor
M-BAYLED	90W 100W 140W 180W	UNV 120-277V 48V 347-480V	D 0-10V	40K 4000K 50K 5000K	DB Dark Bronze SG Silver/Gray WT White BK Black	MS Motion Sensor N None

PERFORMANCE DATA

SYSTEM WATTS	PHOTOMETRY	VOLTAGE	4000K(70CRI)		5000K(70CRI)	
			LUMENS	LPW	LUMENS	LPW
90W	High Bay	347-480V	13000lm	144lm/W	13000lm	144lm/W
100W	High Bay	120-277VAC	14000lm	140lm/W	14000lm	140lm/W
140W	High Bay	347-480V	20500lm	146lm/W	20500lm	146lm/W
180W	High Bay	120-277VAC	25000lm	139lm/W	25000lm	139lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
2	2400	90	347	0.26
		90	480	0.19
1	2600	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
2	3700	140	347	0.40
		140	480	0.29
1	4540	180	120	1.50
		180	208	0.87
		180	240	0.75
		180	277	0.65



© 2018 Mills Labs Inc. All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Mills Labs Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Mills Labs Inc. | 845 E High St., Springfield, OH 45505, USA
 Tel. 800-690-6403

MillsLabs.com