




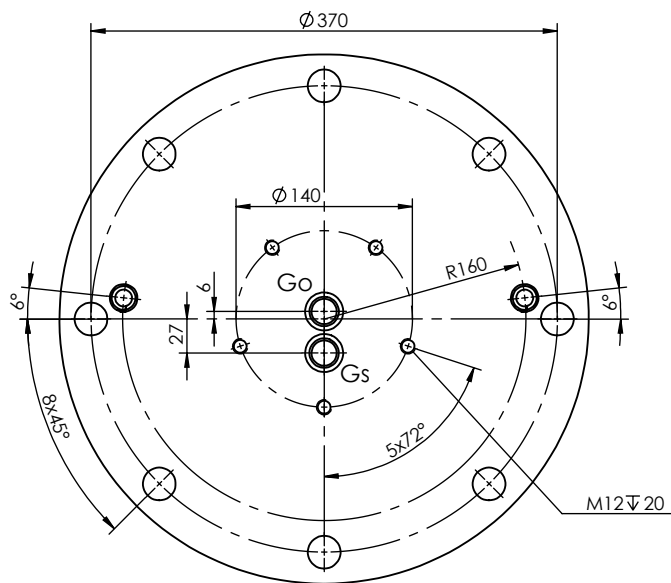

Connex-pin 22x30

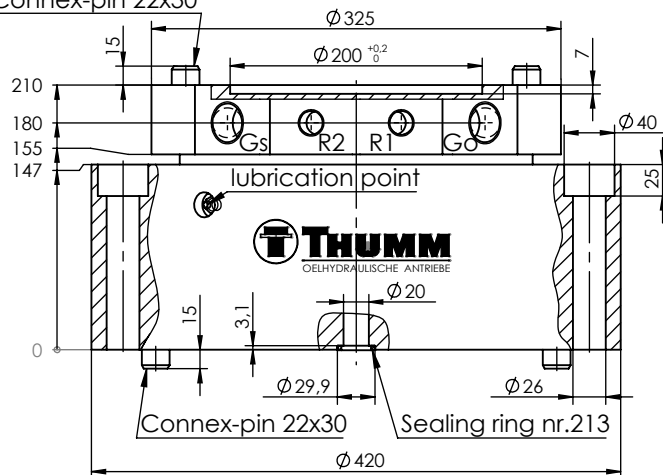

Shock valve
for grab rotate

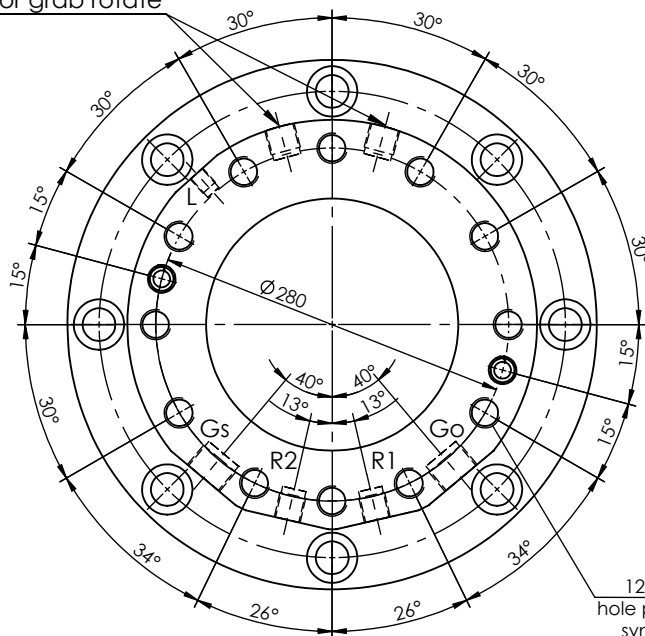

Variant design:

Stator with 12 x M24 thread PCD Ø280mm
hole pattern is not symmetrical

Accessories on request:

oil distributor size Ö3

Machine:

e.g. hydraulic excavators-service weight:
max. 40,0 ts with floating attachment
max. 27,0 ts with rigid attachment

Add-on units:

Clamshell buckets of max. 2,5 m³
Grapples of max. 1,2 m³
Grabs for demolition and sorting
of max. 1,3 ts dead load
Special devices on request.

Technical details:

max. thrust load:	= 200 kN
max. radial load:	= 140 kN
p max. grab	= 35 MPa/350bar
p max. rotating engine	= 25 MPa/250bar
max. torque	= 6250 Nm
Torque /100bar	= 2500 Nm
Adsorption volume	= 1850 cm³/R
min. oil passage Gs / Go	= NW 18
Mass	= 173 kg
max. rotations	= 30 rpm
Bending moment Mb per.	= 43 kNm
	(leaf 4.620.00)

Connections:

R1,R2: rotator rotate
Go: open grab
Gs: close grab
L: measuring conn.



Volume of delivery:

2 Sealing ring nr. 213 Article nr.: 1.02.130
4 Connex-pin SG 22x30 Article nr.: 1.04.003

Paint: black primary coat