

Ph 07 3277 2277
 Fax 07 3277 2288
 Email sales@selectgear.com.au

PARCEL SHELF RETRACTABLE SEAT BELT

In some vehicles, it is an option to mount the retractor of a seat belt using the rear parcel shelf as the anchoring structure. The belts are a lap sash style of belt (see Diagram 1) with a few differences to “On Pillar “ or “In Pillar” models.

“**Parcel shelf**” belts do not use a sash guide (the flat loop pillar fitting that creates the sash part of the belt). Instead they are mounted and orientated such that the retractor itself determines the angle of the sash.

There are only two variations of parcel shelf mounted retractors. Both must be mounted to a horizontal surface and generally service rear seat passengers.

“**On Parcel Shelf**” is the term used to describe a belt whose retractor sits on top of the parcel shelf. The relevant and only angles that these may be positioned at are 0° to the direction of the vehicle and 0° to the floor of the vehicle. They are known as “0/0 belts”. They are supplied with a plastic cover to hide the retractor. Refer to Diagram 2.

“**Under Parcel Shelf**” describes a belt whose retractor is mounted underneath the parcel shelf. These belts are exactly the opposite of the “On Parcel Shelf” and are therefore termed “180/180” belts. Refer to Diagram 3.

Please note: Under parcel belts usually have a specially moulded trim guide threaded onto the webbing. This trim guide should be retrieved for fitment to replacement under parcel shelf belts. Contact Select Gear for further information.

DIAGRAM 1

Standard belt length	2.6 metres
Long belt length	3.2 metres
Short belt length	2.0 metres

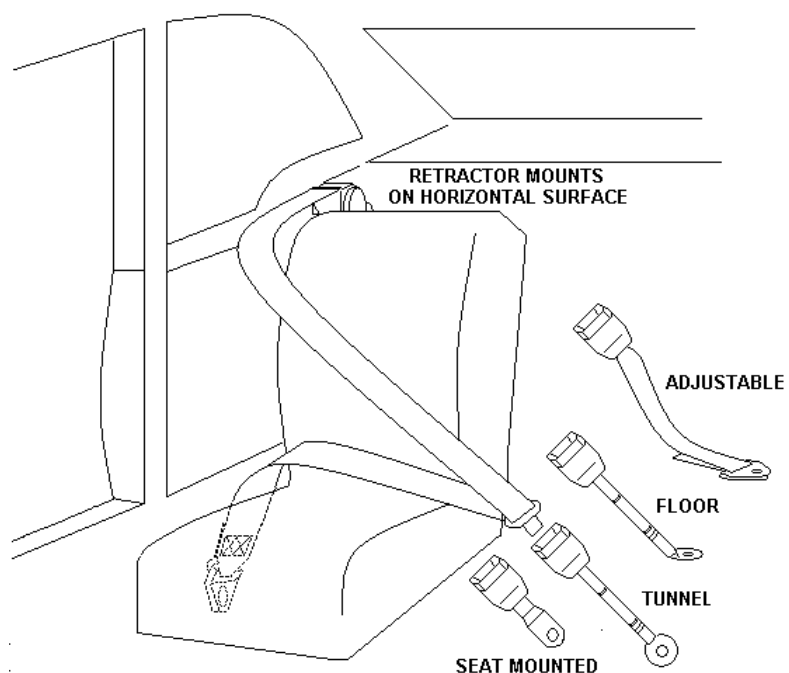


Diagram 2 (not to scale)


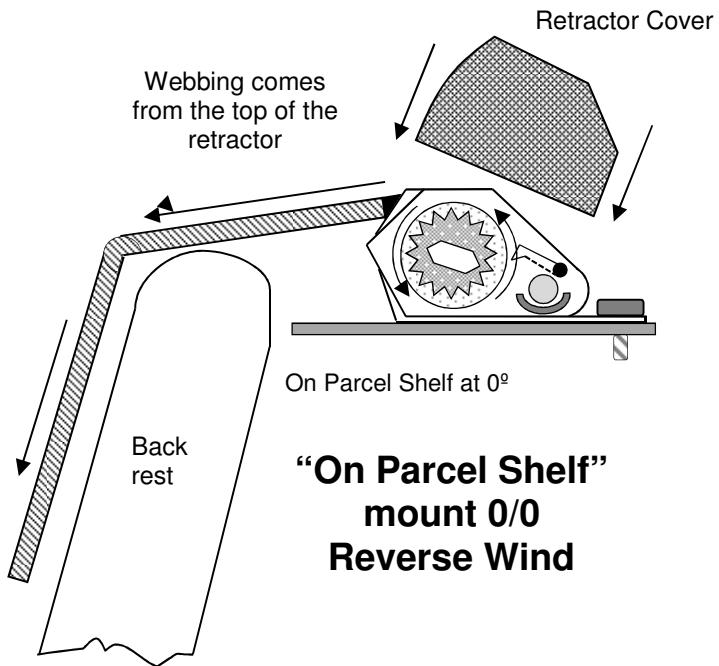


Diagram 3 (not to scale)

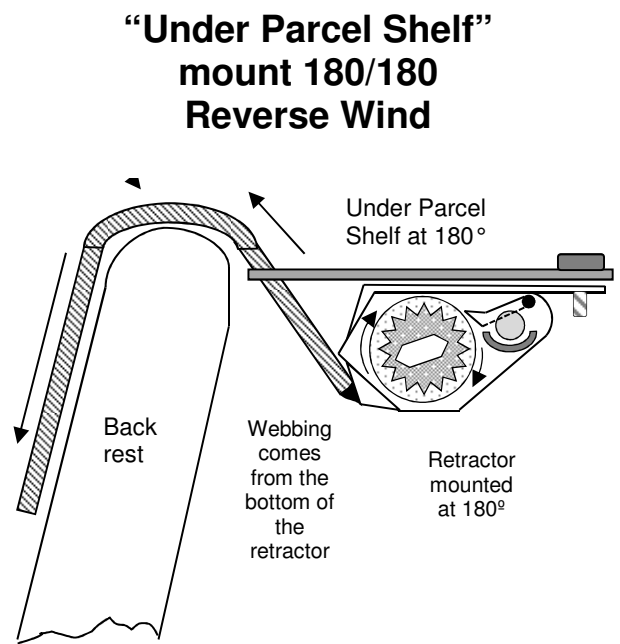

← Direction of Vehicle Going Forward

Buckles (Refer to Diagram 1) are either

Stalk (cable) mounted on the transmission tunnel (vertical surface)

Stalk (cable) mounted on the floor (horizontal surface) – note the anchor plate (see Diagram 1)

Stem (steel plate) mounted on the seat or vertical bracket

Webbing Adjustable Standard (150mm - 610mm), Long (150mm – 950mm)

Webbing Fixed Length mounted on tunnel, floor or seat

Buckles are measured in millimetres from the end of the buckle head (red release button) to the centre of the mounting hole of the anchor plate.

Buckle lengths available are

Stalk (tunnel mounted) – 220mm, 250mm, 300mm, 350mm, 400mm, 450mm

Stalk (floor mounted) – 250mm, 300mm, 350mm, 400mm. Specify RH side or LH side of vehicle

Stem (seat or vertical bracket mounted) – 100mm, 135mm, 170mm, 210mm

Webbing (fixed length) – 190mm, 275mm, 425mm, 500mm