


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION |           |             |                   |
|----------------------|-----------|-------------|-------------------|
| Rev.                 | Rev. Date | Modified By | Brief Description |
|                      |           |             |                   |

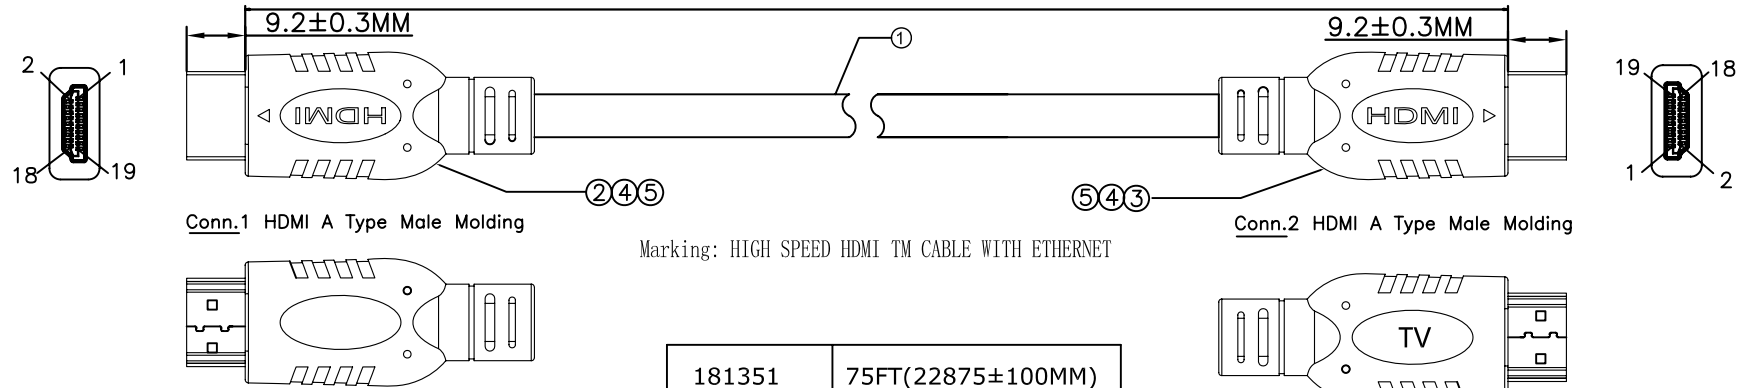


Conn.1 HDMI A Type Male Molding


Conn.2 HDMI A Type Male Molding

Marking: HIGH SPEED HDMI TM CABLE WITH ETHERNET

|        |                    |
|--------|--------------------|
| 181351 | 75FT(22875±100MM)  |
| 181352 | 100FT(30500±100MM) |

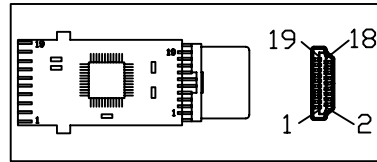

Pin Assignment

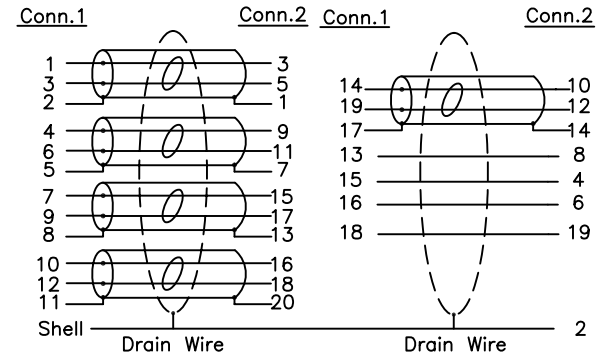

Electrical performance test: TYPE C to HDMI machine testing

1. The video has no signal jitter, smearing, ghosting, missing color and other abnormal displaying.

2. TV or monitor: 4K\*2K/30HZ

|    |  |      |      |
|----|--|------|------|
| 5  | 45P PVC BLACK  | 1    | PCS  |
| 4  | PE   | 1    | PCS  |
| 3  | HDMI AM TO AM PCBA (IC:1700) Shell Nickel BLACK Insulation   | 1    | PCS  |
| 2  | HDMI (A) M Solder Type Shell Nickel BLACK Insulation   | 1    | PCS  |
| 1  | HDMI1.4 UL20276(24#(1/0.527BC)*1P+D+AL+MYLAR)*5P+26#(1/0.404BC)*4C+F+ADB(16/8/0.12AL) OD:9.5mm BLACK | XX   | m    |
| NO | DESCRIPTION  | Q'TY | UNIT |

Unless specified on the drawing, tolerances are per the follows:

|     |       |
|-----|-------|
| .   | +1    |
| .x  | +0.2  |
| .xx | +0.05 |



|             |                 |                                  |
|-------------|-----------------|----------------------------------|
| DRAWN BY    | DATE: 2017.5.28 | DESCRIPTION: HDMI AM TO AM CABLE |
| CHECKED BY  | SHEET 1 of 2    | ITEM NO. 181XXX                  |
| APPROVED BY | SCALE 1:1       | REV. 00 UNIT:mm                  |