
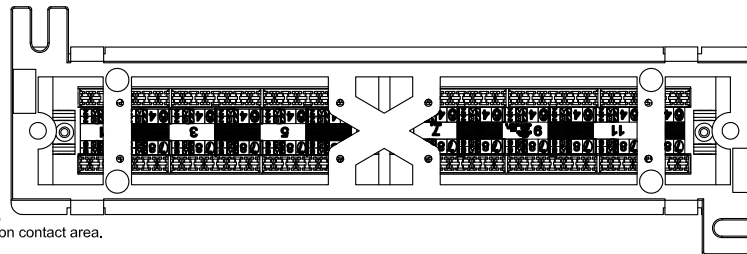
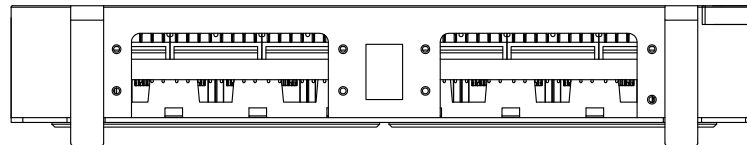



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

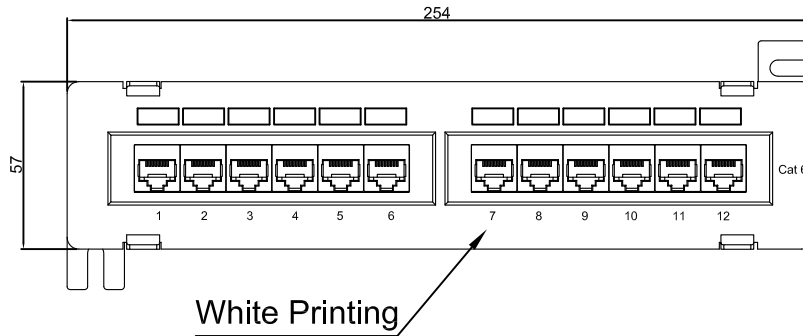

Physical Specification
 Panel: SPCC
 Bracket: PC UL94V-0
 Jack Housing: PBT UL94V-0
 Spring PIN: Phosphor Bronze C5210, t=0.3mm.
 Plating 120u" MatteTin over 60u" Nickel undercoat,
 Besides Plating 50u" Gold over the plated surface on contact area.
 PIN Holder: PBT UL94V-0.
 IDC Housing: PC UL94V-0
 IDC Contact: Phosphor Bronze C5191, t=0.4mm, 200u" Matte Tin over 100u" soft Nickel undercoat
 PCB: FR-4

Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
 Contact Force: 100 grams with FCC compliant RJ-45 plug
 Plug Retention Force: 11 lbf min
 Durability: 200 termination cycles
 Contact Compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
 SUITABLE IMPACT TOOL: 110 STYLE PUNCHDOWN TOOL
 Operating Temperature Range: -10°C to 60°C
 Storage Temperature Range: -40°C to 68°C
 Humidity: 10%~90%RH

Electrical
 Insulation Resistance: 500 MΩ.
 Dielectric Withstanding Voltage: 1000 V AC.
 DC Current Rating: 1.5 Amps .
 DC Resistance: 0.1Ω.
 Contact Resistance: 20 MΩ.

| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |
|-----|------------|---------------------------|-----|------|
| ③ | | | | |
| ② | Cable Ties | 3*100MM | 12 | PCS |
| ① | IDC Cap | 15*9.5*9.6MM | 24 | PCS |


ACCORDING TO ANSI/TIA-568-C.2
 REQUIREMENTS
 C6 CHANNEL COMPLIANT

Cat 6

56Y4
 E145249



COMMUNICATION
 CIRCUIT ACCESSORIES

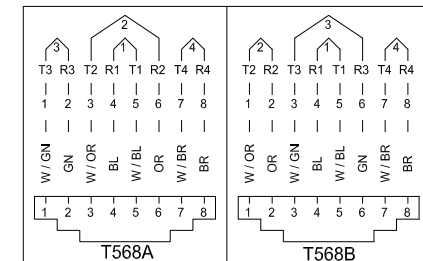

| | | | | | |
|-------------|-----|-------|------------|--------------|---|
| DRAWN BY | WLL | DATE: | 2017/06/15 | DESCRIPTION: | Cat.6 110 Type Patch Panel 12Port Vertical w/Bracket |
| CHECKED BY | | SHEET | 1 of 1 | ITEM NO. | |
| APPROVED BY | | SCALE | 1:2 | REV. | 01 |
| | | UNIT: | mm | | |