

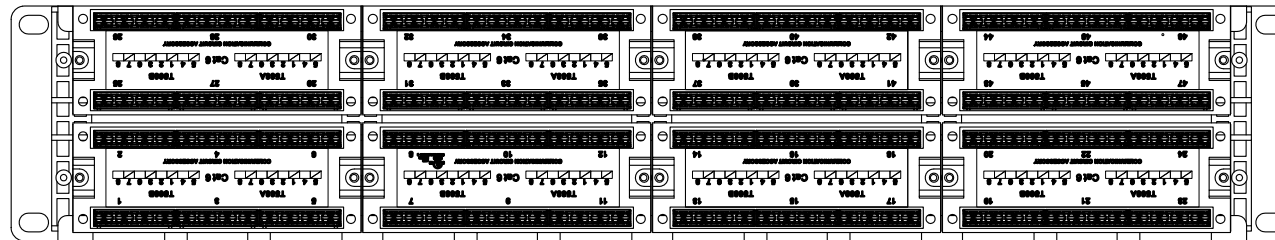



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

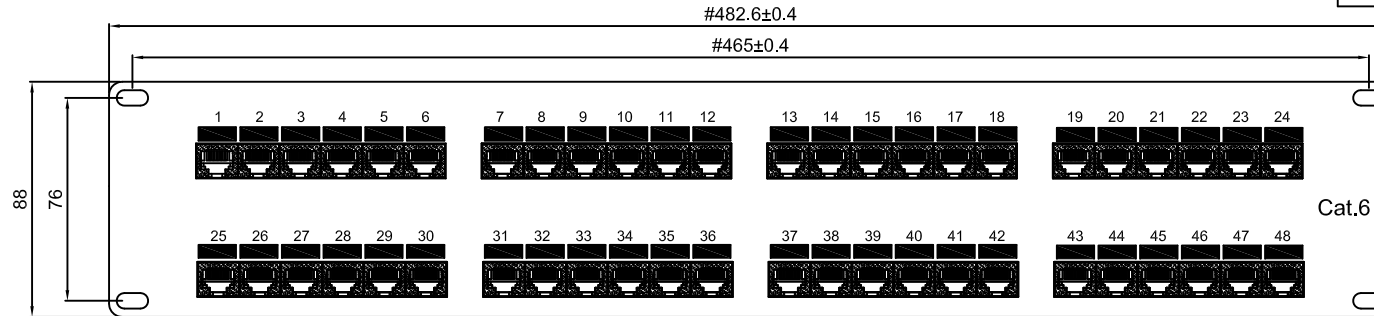

ACCORDING TO ANSI/TIA-568-C.2 REQUIREMENTS C6 CHANNEL COMPLIANT

Physical Specification
 Panel: SPCC
 Jack Housing: PBT UL94V-0
 Spring PIN: Phosphor Bronze C5210, t=0.3mm, Plating 120u" Matte Tin over 60u" Nickel undercoat, Besides Plating 50u" Gold over the plated surface on contact area.
 PIN Holder: PBT UL94V-0
 IDC Housing: PC UL94V-0
 IDC Contact: Phosphor Bronze C5191, t=0.4mm, 200u" Matte Tin over 100u" soft Nickel undercoat
 PCB: FR-4

Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
 Contact Force: 100 grams with FCC compliant RJ-45 plug
 Plug Retention Force: 11 lbf min
 Durability: 200 termination cycles
 Contact Compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
 SUITABLE IMPACT TOOL: 110 STYLE PUNCHDOWN TOOL
 Operating Temperature Range: -10 °C to 60 °C
 Storage Temperature Range: -40 °C to 68 °C
 Humidity: 10%~90%RH


Electrical
 Insulation Resistance: 500 MΩ.
 Dielectric Withstanding Voltage: 1000 V AC.
 DC Current Rating: 1.5 Amps .
 DC Resistance: 0.1Ω.
 Contact Resistance: 20 MΩ.

Cat 6

56Y4
E145249



COMMUNICATION CIRCUIT ACCESSORIES

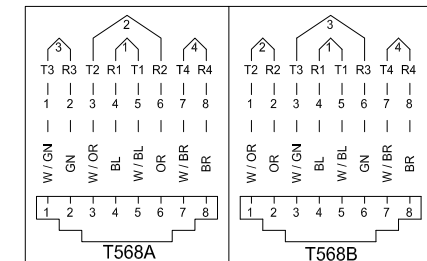

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②	Cable Ties	3*100MM	12*4	PCS
①	IDC Cap	15*9.5*9.6MM	24*2	PCS

EagleG.com - Quality You Can Trust...

DRAWN BY	WLL	DATE:	2017/06/15	DESCRIPTION:	Cat.6 110 Type Patch Panel 48Port Rackmount
CHECKED BY		SHEET	1 of 1	ITEM NO.	
APPROVED BY		SCALE	1:2	REV.	01
		UNIT:	mm		