


# Fire Alarm FPLR Cable

## 18AWG/4C Red Solid Shielded

Product Specification

### Cable Detail

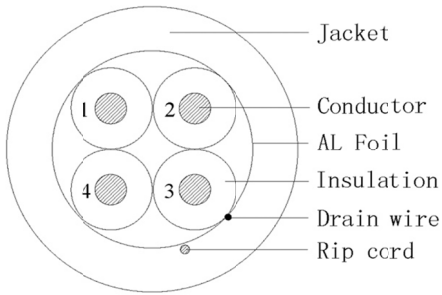

### Approval



### Physical Characteristics

Conductor	Solid B.C.
AWG	18
Conductor Diameter	1.02 (mm)
<b>Insulation Material</b>	<b>PVC</b>
Average Thickness	0.265 (mm)
Min. Point Thickness	0.240 (mm)
Diameter	1.55 (±0.05mm)
Drain Wire (Stranded TC) Dia.	7/0.25 (±0.003mm)
Al Foil Shield	YES (mm)
<b>Assembly Diameter</b>	<b>3.85 (±0.1mm)</b>
<b>Jacket Material</b>	<b>PVC</b>
Average Thickness	0.45 (mm)
Min. Point Thickness	0.40 (mm)
Diameter	4.80 (±0.1mm)
Rip Cord	Per request
<b>Nominal Weight</b>	<b>34 (pounds)</b>
<b>Rated Temperature</b>	<b>75 (°C)</b>

Test Object	Jacket
<b>Test Material</b>	<b>PVC</b>
Before Tensile Strength	>=13.8 (Mpa)
Aging Elongation	>=100 (%)
<b>Aging Condition</b>	<b>100x168 (°Cxhrs)</b>
Before Tensile Strength	>=85% of unaged (Mpa)
Aging Elongation	>=50% of unaged (%)
<b>Cold Bend (-20±2°Cx4hrs)</b>	<b>No Crack</b>

### Colors

- Insulation Color  
1.Black / 2.Red / 3.Yellow / 4.Blue
- Jacket Color  
Red

### Package

1000FT / REEL

### Cable Marking

EXXXXX 18AWG 4/C SHIELDED (UL) FPLR DEVICE/ZONE  
A B C D E F 1 2 3 4 5 6 7 8 RoHS \*\*\*\*FT