


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

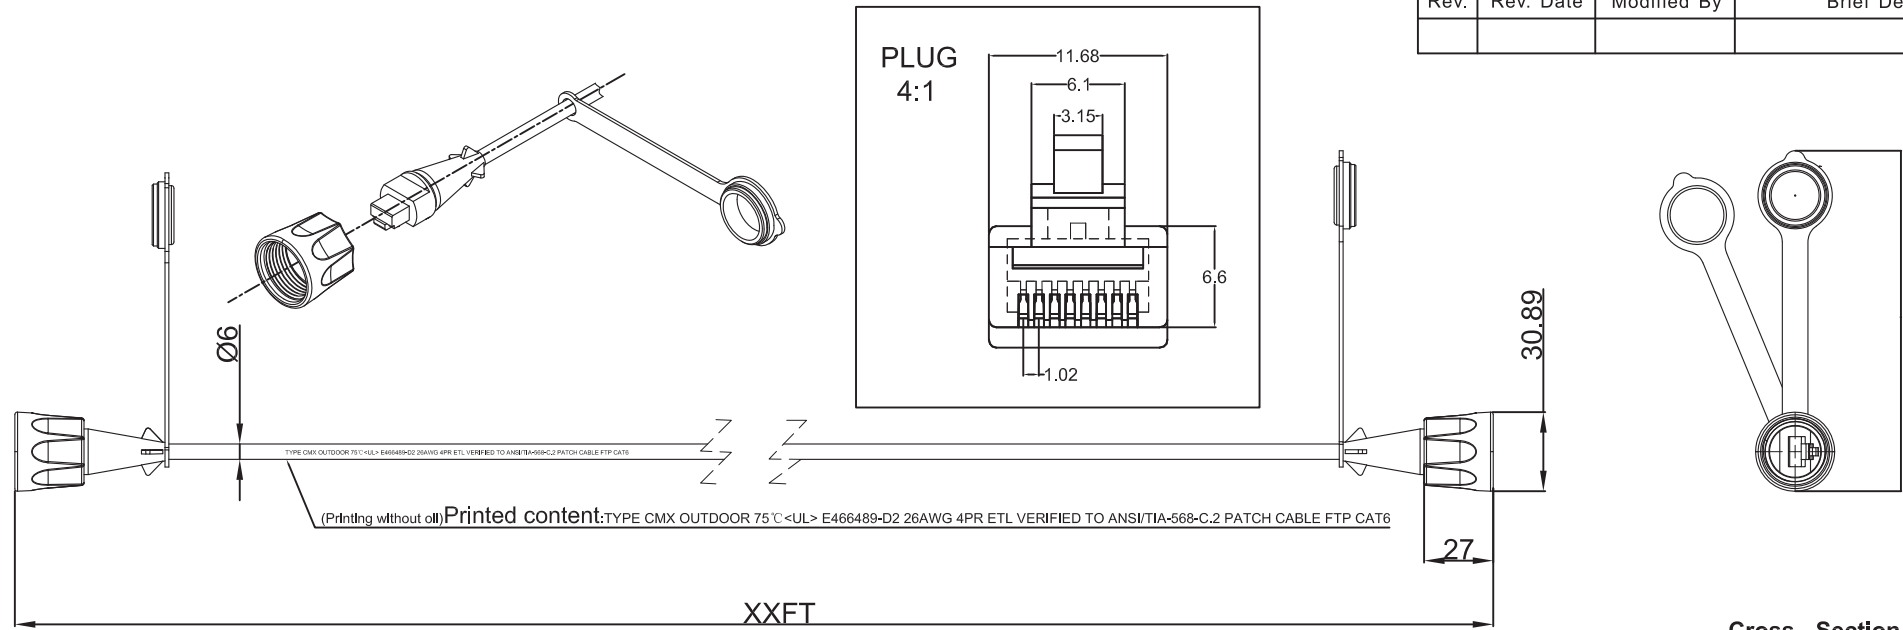

(Printing without oil) Printed content: TYPE CMX OUTDOOR 75°C<UL> E466489-D2 26AWG 4PR ETL VERIFIED TO ANSI/TIA-568-C.2 PATCH CABLE FTP CAT6


**SPECIFICATION:**

1. The material of cords is a kind of multicore cords and they meet the requirements stipulated in TIA/EIA-568-B about sixth category of patch cords.
2. Support 250 MHz broadband
3. Dielectric withstanding voltage: 1000V
4. Contact resistance: 2.5mΩ Max
5. Insulation resistance: 1000MΩ Min
6. Insertion life: 750 cycles Min
7. Waterproof cable, Oil free
8. Operating Temperature Range: -30°C to 75°C

**MATERIAL:**

1. The housing of patch cords: PBT
2. Dustproof cap: PVC
3. PIN: PHOSPHOR BRONZE C5191

Cross - Section View :

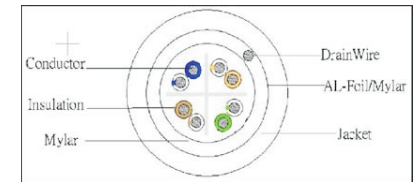

Cat 6

56Y4  
E466489



COMMUNICATION  
CIRCUIT ACCESSORIES



NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
④	Washer	Waterproof、φ1.8MM	2	PCS
③	Dust cover	PVC、Waterproof	2	PCS
②	Connector Nut	PBT、Waterproof	2	PCS
①	Crystal Head	Sealed plastic structure, Trigeminal sheet Six on two under	2	PCS

EagleG.com - Quality You Can Trust...

DRAWN BY	DATE: 2019-2-20	DESCRIPTION: Cat.6 FTP Industrial patch cord w/dust cap 125Ft
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00

UNIT:mm