
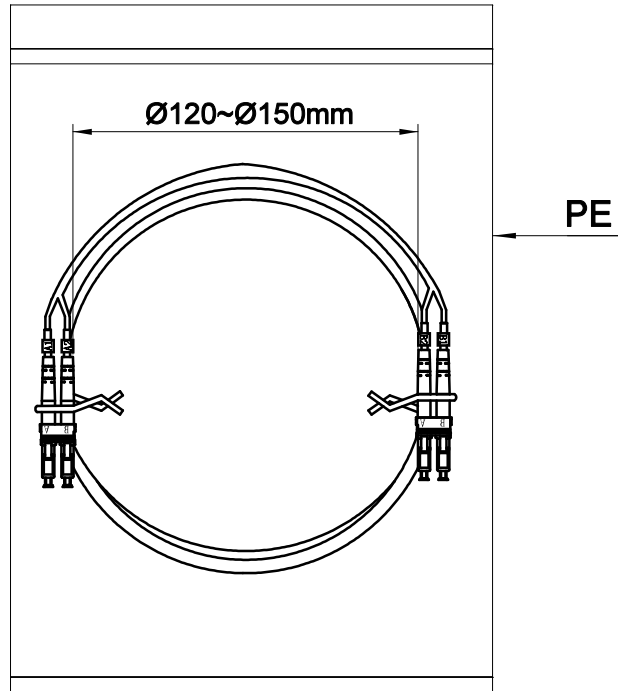


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

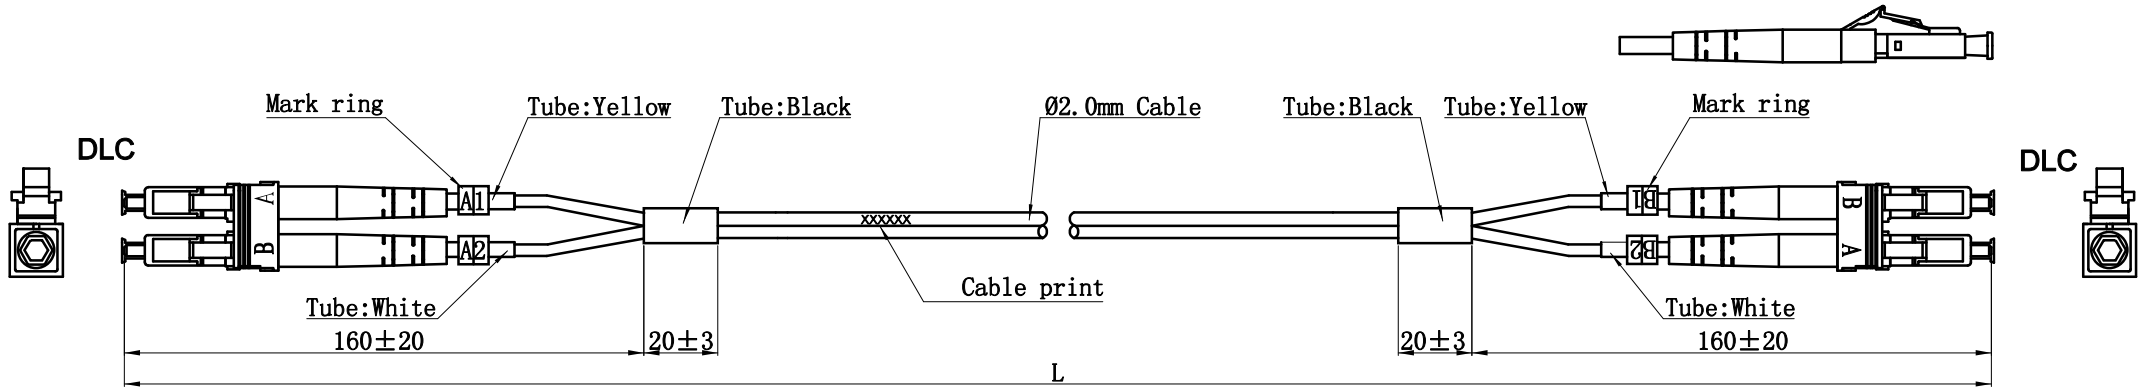

Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM4
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Violet
Cable Diameter(mm)	Ø2.0
Operating Temperature(°C)	-25~+70
Storage Temperature(°C)	-25~+70
Insertion loss(dB)	≤0.3
Return loss(dB)	≥35

L≤10m, TOLERANCES:0≤ΔL≤10cm
 L> 10m, TOLERANCES:0≤ΔL≤1%*L

Remarks:

Length	ITEM NO.	Length	ITEM NO.
L=1M		L=20M	102970
L=1.5M		L=25M	102971
L=2M		L=30M	102972
L=3M		L=35M	102973
L=4M		L=40M	102974
L=5M		L=50M	102975
L=6M			
L=7M			
L=8M			
L=9M			
L=10M			
L=12M			
L=15M			



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

DRAWN BY	DATE: 2018/03/12	DESCRIPTION: LC-LC-DX OM4 Patchcord
CHECKED BY	SHEET 1of 2	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm