

Westinghouse Lighting

# LED Program



# LED HIGHLIGHTS

## **NEW!** UPDATED TECHNOLOGY LED LAMPS

Replace your 4 ft. linear fluorescent tubes with energy-saving, long-lasting LED lamps. Featuring the latest improvements in LED technology, our updated T8 Direct Install LED lamps provide excellent light distribution and exceptional downward illumination. Damp-rated and suitable for enclosed fixtures, these lamps can be used in outdoor-rated fixtures and are dimmable when used with an applicable ballast. Ideal for multiple applications that require high lumen output, they are available in 3500K, 4000K, or 5000K.



## **NEW!** UPDATED TECHNOLOGY LED LAMPS

Enjoy the familiar look of an incandescent reflector lamp with all the benefits of long-lasting, energy-saving LED technology. Our updated BR30 LED flood lamps provide excellent light distribution and are perfect for track and recessed lighting in home or retail applications. Damp-rated and suitable for enclosed fixtures, these lamps are also ideal for use in outdoor-rated fixtures. Available in 2700K, the lamps are dimmable and come packaged individually or in a convenient 12-pack.



## UPDATED TECHNOLOGY RECESSED LED DOWNLIGHT

All-in-one, labor-saving slim recessed LED downlight is perfect for commercial and residential applications in shallow ceilings or recess spaces. Easy to install, this ENERGY STAR rated, 3" diameter downlight is available in 3000K. It can be used to comply with the 2019 Title 24, Part 6 high efficacy light source requirements in the state of California. Free of harmful mercury, this LED light is an excellent choice for your replacement needs.



Visit [www.westinghouselighting.com](http://www.westinghouselighting.com) for our complete assortment of LED lamps, light fixtures, ceiling fans and accessories.

All LED lamps in this brochure are shown unlit.  
All LED lamps are approved for use in damp locations unless otherwise noted.



## DECORATIVE FILAMENT LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>B11 DECORATIVE</b>														
50591 ▲	2.5	Cand.	2.5B11/FilamentLED/DIM/CL/CB/27	Box	25	Warm White	Clear	2700	80	200	15000	13.6	\$0.30	3.82"
35171 ▲	4	Cand.	4B11/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	3.82"
50621 ▲	4.5	Cand.	4.5B11/FilamentLED/DIM/CL/CB/27 2CD	Card (2)	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.82"
43168 ▲	4.5	Cand.	4.5B11/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.82"
43169 ▲	4.5	Med.	4.5B11/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.58"
<b>CA11 DECORATIVE</b>														
35172 ▲	4	Cand.	4CA11/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	3.82"
51130 ▲	4	Med.	4CA11/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	365	15000	13.6	\$0.48	4.22"
43170 ▲	4.5	Cand.	4.5CA11/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	4.37"
43171 ▲	4.5	Med.	4.5CA11/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	4.13"
<b>F15</b>														
33193 ▲	2.5	Med.	2.5F15/FilamentLED/DIM/CL/27 1CD	Card	25	Warm White	Clear	2700	80	250	15000	13.6	\$0.30	4.33"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## DECORATIVE GLOWESCENT® LAMPS (SPUN SATIN)



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>C11 DECORATIVE</b>														
52070 ▲	4.5	Cand.	4.5C11/GlowescentLED/DIM/WH/CB/27	Box	60	Warm White	White	2700	80	480	15000	13.6	\$0.54	3.86"
<b>C15 DECORATIVE</b>														
52100 ▲	4.5	Med.	4.5C15/GlowescentLED/DIM/WH/27	Box	60	Warm White	White	2700	80	480	15000	13.6	\$0.54	4.33"
<b>H19 DECORATIVE</b>														
52110 ▲	7.5	Med.	7.5H19/GlowescentLED/DIM/WH/27	Box	75	Warm White	White	2700	80	800	15000	13.6	\$0.90	5.79"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

# FILAMENT LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>A15</b>														
43166 ▲	4.5	Med.	4.5A15/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	3.30"
<b>A19</b>														
53164 ▲	4.5	Med.	4.5A19/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.13"
51351 ▲	4.5	Med.	4.5A19/FilamentLED/DIM/CL/27 2PK	Box (2)	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.13"
53165 ▲	6.5	Med.	6.5A19/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.13"
51361 ▲	6.5	Med.	6.5A19/FilamentLED/DIM/CL/27 2PK	Box (2)	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.13"
50163 ▲	6.5	Med.	6.5A19/FilamentLED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	810	15000	13.6	\$0.78	4.13"
52240 ▲	9	Med.	9A19/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	800	15000	13.6	\$1.08	4.17"
51671 ▲	10	Med.	10A19/FilamentLED/DIM/CL/27	Box	75	Warm White	Clear	2700	80	1100	15000	13.6	\$1.20	4.13"
<b>G16.5 GLOBE</b>														
50231 ▲	4	Cand.	4G16.5/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	3.23"
50242 ▲	4.5	Cand.	4.5G16.5/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.23"
<b>G25 GLOBE</b>														
51691 ▲	4.5	Med.	4.5G25/FilamentLED/DIM/CH/27	Box	40	Warm White	Half Chrome	2700	80	400	15000	13.6	\$0.54	4.72"
43172 ▲	5.5	Med.	5.5G25/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	500	15000	13.6	\$0.66	4.52"
50172 ▲	5.5	Med.	5.5G25/FilamentLED/DIM/SW/27	Box	40	Warm White	Soft White	2700	80	500	15000	13.6	\$0.66	4.52"
50181 ▲	6.5	Med.	6.5G25/FilamentLED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	690	15000	13.6	\$0.78	4.52"
43173 ▲	6.5	Med.	6.5G25/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.52"
<b>G40 GLOBE</b>														
43175 ▲	6.5	Med.	6.5G40/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	6.57"
<b>ST15</b>														
35186 ▲	4.5	Med.	4.5ST15/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.65"
35187 ▲	6.5	Med.	6.5ST15/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	800	15000	13.6	\$0.78	4.65"
<b>ST20</b>														
45182 ▲	4.5	Med.	4.5ST20/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	5.43"
45183 ▲	6.5	Med.	6.5ST20/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	5.43"
53178 ▲	6.5	Med.	6.5ST20/FilamentLED/DIM/A/22	Box	60	Warm White	Amber	2200	80	630	15000	13.6	\$0.78	5.43"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

# FILAMENT T LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>T6 &amp; T6.5</b>														
51580 ▲	2.5	Cand.	2.5T6/FilamentLED/DIM/CL/CB/27	Box	25	Warm White	Clear	2700	80	200	15000	13.6	\$0.30	3.15"
51940 ▲	4	Inter.	4T6.5/FilamentLED/DIM/CL/IN/27	Box	40	Warm White	Clear	2700	80	350	15000	13.6	\$0.48	4.65"
51680 ▲	4.5	Cand.	4.5T6/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	450	15000	13.6	\$0.54	3.23"
<b>T9</b>														
35184 ▲	4.5	Med.	4.5T9/FilamentLED/DIM/CL/27 1CD	Card	60	Warm White	Clear	2700	80	450	15000	13.6	\$0.54	7.10"
35188 ▲	6.5	Med.	6.5T9/FilamentLED/DIM/CL/27 1CD	Card	75	Warm White	Clear	2700	80	800	15000	13.6	\$0.78	11.97"
<b>T10</b>														
45185 ▲	3.5	Med.	3.5T10/FilamentLED/DIM/CL/27 1CD	Card	60	Warm White	Clear	2700	80	350	15000	13.6	\$0.42	4.92"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## DECORATIVE LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>TORPEDO</b>														
43045 ▲	2.8	Cand.	2.8B11/LED/DIM/CL/CB/30	Hanging Box	25	Warm White	Clear	3000	80	160	25000	22.8	\$0.34	3.78"
50691 ▲	3.5	Cand.	3.5B11/LED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	90	300	25000	22.8	\$0.42	3.78"
53141 ▲	4.5	Cand.	4.5B11/LED/DIM/CL/CB/27	Hanging Box	40	Warm White	Clear	2700	80	300	25000	22.8	\$0.54	3.78"
50700 ▲	5	Med.	5B11/LED/DIM/CL/27	Box	40	Warm White	Clear	2700	90	325	25000	22.8	\$0.60	3.78"
53130 ▲	6.5	Cand.	6.5B13/LED/DIM/CL/CB/27	Hanging Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.78	4.49"
53132 ▲	6.5	Med.	6.5B13/LED/DIM/CL/27	Hanging Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.78	4.61"
<b>FLAME TIP</b>														
45124 ▲	4	Cand.	4C11/LED/CL/CB/27 2CD	Card (2)	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	4.00"
45129 ▲	7	Cand.	7C13/LED/CL/CB/27 2CD	Card (2)	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.84	4.49"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

## GENERAL PURPOSE LAMPS



OMNI A15

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>OMNI A15</b>														
45134 ▲	5	Med.	5OMNIA15/LED/SW/27 1CD	Card	40	Warm White	Soft White	2700	80	450	15000	13.6	\$0.60	3.54"
45136 ▲	5.5	Med.	5.5OMNIA15/LED/SW/27 1CD	Card	60	Warm White	Soft White	2700	80	600	15000	13.6	\$0.66	3.55"
33191 ▲	5.5	Med.	5.5OMNIA15/LED/DIM/SW/27 1CD	Card	40	Warm White	Soft White	2700	80	450	25000	22.8	\$0.66	3.54"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

# GENERAL PURPOSE LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>OMNI A19</b>														
51850 ▲	6	Med.	60MNIA19/LED/DIM/SW/27	Box	40	Warm White	Soft White	2700	80	480	25000	22.8	\$0.72	4.33"
51321 ▲	6	Med.	60MNIA19/LED/DIM/SW/30	Box	40	Warm White	Soft White	3000	80	480	25000	22.8	\$0.72	4.44"
51370 ▲	6	Med.	60MNIA19/LED/DIM/SW/30 4PK	Box (4)	40	Warm White	Soft White	3000	80	480	25000	22.8	\$0.72	4.33"
53189 ▲	6	Med.	60MNIA19/LED/SW/30	Box	40	Warm White	Soft White	3000	80	480	15000	13.6	\$0.72	4.33"
35156 ▲	6	Med.	60MNIA19/LED/SW/30 4PK	Box (4)	40	Warm White	Soft White	3000	80	480	15000	13.6	\$0.72	4.33"
45138 ▲	6	Med.	60MNIA19/LED/SW/50	Box	40	Daylight	Soft White	5000	80	480	15000	13.6	\$0.72	4.33"
43697 ▲	9	Med.	90MNIA19/LED/SW/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.08	4.33"
51840 ▲	9	Med.	90MNIA19/LED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.08	4.44"
43440 ▲	9	Med.	90MNIA19/LED/SW/30 1CD	Card	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.33"
51830 ▲	9	Med.	90MNIA19/LED/DIM/SW/30 1CD	Card	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.44"
24 50741 ▲	9	Med.	90MNIA19/LED/DIM/SW/30	Box	60	Warm White	Soft White	3000	90	810	25000	22.8	\$1.08	4.25"
51331 ▲	9	Med.	90MNIA19/LED/DIM/SW/30	Box	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.44"
51380 ▲	9	Med.	90MNIA19/LED/DIM/SW/30 4PK	Box (4)	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.33"
51341 ▲	9	Med.	90MNIA19/LED/DIM/SW/50	Box	60	Daylight	Soft White	5000	80	800	25000	22.8	\$1.08	4.44"
50771 ▲	9	Med.	90MNIA19/LED/DIM/SW/40	Box	60	Cool White	Soft White	4000	80	800	25000	22.8	\$1.08	4.44"
35173 ▲	9.5	Med.	9.5OMNIA19/LED/SW/27 12PK	Box (12)	60	Warm White	Soft White	2700	80	800	15000	13.6	\$1.14	4.33"
53127 ▲	9.5	Med.	9.5OMNIA19/LED/SW/30	Box	60	Warm White	Soft White	3000	80	800	15000	13.6	\$1.14	4.33"
45160 ▲	9.5	Med.	9.5OMNIA19/LED/SW/30 4PK	Box (4)	60	Warm White	Soft White	3000	80	800	15000	13.6	\$1.14	4.33"
45140 ▲	9.5	Med.	9.5OMNIA19/LED/SW/50	Box	60	Daylight	Soft White	5000	80	800	15000	13.6	\$1.14	4.33"
53158 ▲	9.8	GU24	9.8OMNIA19/LED/DIM/SW/GU24/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.18	4.33"
51960 ▲	11	Med.	110MNIA19/LED/SW/27	Box	75	Warm White	Soft White	2700	80	1100	15000	13.6	\$1.32	4.49"
51951 ▲	11	Med.	110MNIA19/LED/DIM/SW/27	Box	75	Warm White	Soft White	2700	80	1100	25000	22.8	\$1.32	4.33"
53190 ▲	11	Med.	110MNIA19/LED/SW/30	Box	75	Warm White	Soft White	3000	80	1100	15000	13.6	\$1.32	4.49"
45157 ▲	11	Med.	110MNIA19/LED/SW/30 2PK	Box (2)	75	Warm White	Soft White	3000	80	1100	15000	13.6	\$1.32	4.49"
50811 ▲	11	Med.	110MNIA19/LED/DIM/SW/30	Box	75	Warm White	Soft White	3000	80	1100	25000	22.8	\$1.32	4.33"
45141 ▲	11	Med.	110MNIA19/LED/SW/50	Box	75	Daylight	Soft White	5000	80	1100	15000	13.6	\$1.32	4.49"
55145 ▲	11	Med.	110MNIA19/LED/DIM/SW/50	Box	75	Daylight	Soft White	5000	80	1100	25000	22.8	\$1.32	4.33"
53140	3/9/12	Med.	3/9/12OMNIA19/LED/3WAY/SW/27	Box	30/ 70/ 100	Warm White	Soft White	2700	80	280/ 950/ 1200	25000	22.8	\$1.45	4.65"
50940 ▲	15	Med.	150MNIA19/LED/DIM/SW/27	Box	100	Warm White	Soft White	2700	80	1600	25000	22.8	\$1.81	4.92"
51970 ▲	15	Med.	150MNIA19/LED/DIM/SW/30	Box	100	Warm White	Soft White	3000	80	1600	25000	22.8	\$1.81	4.92"
50750 ▲	15	Med.	150MNIA19/LED/DIM/SW/40	Box	100	Cool White	Soft White	4000	80	1600	25000	22.8	\$1.81	4.64"
50760 ▲	15.5	Med.	15.5OMNIA19/LED/SW/40	Box	100	Cool White	Soft White	4000	80	1600	15000	13.6	\$1.87	4.64"
50790 ▲	15.5	Med.	15.5OMNIA19/LED/SW/50	Box	100	Daylight	Soft White	5000	80	1600	15000	13.6	\$1.87	4.64"
<b>A19</b>														
52280 ▲	14	Med.	14A19/LED/SW/30	Box	100	Warm White	Soft White	3000	80	1500	15000	13.6	\$1.69	4.25"
52300 ▲	14	Med.	14A19/LED/SW/30 2PK	Box (2)	100	Warm White	Soft White	3000	80	1500	15000	13.6	\$1.69	4.25"
52290 ▲	14	Med.	14A19/LED/SW/50	Box	100	Daylight	Soft White	5000	80	1500	15000	13.6	\$1.69	4.25"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

## COLOR GENERAL PURPOSE LAMPS



COLOR OMNI A19

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>SPECIALTY - COLOR OMNI A19</b>														
03153 ▲	5	Med.	50MNIA19/LED/R	Box	40	—	Red	—	—	—	25000	22.8	\$0.60	4.33"
03154 ▲	6	Med.	60MNIA19/LED/B	Box	40	—	Blue	—	—	—	25000	22.8	\$0.72	4.33"
03152 ▲	6	Med.	60MNIA19/LED/G	Box	40	—	Green	—	—	—	25000	22.8	\$0.72	4.33"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## SPECIALTY 120-277V LAMPS



OMNI A21

OMNI A23

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>OMNI A21</b>														
51170 ▲	19	Med.	19OMNIA21/LED/SW/120-277V/50	Box	125	Daylight	Soft White	5000	80	2000	25000	22.8	\$2.29	5.55"
51590 ▲	25	Med.	25OMNIA21/LED/SW/120-277V/30	Box	150	Warm White	Soft White	3000	80	2550	25000	22.8	\$3.01	5.47"
51700 ▲	25	Med.	25OMNIA21/LED/SW/120-277V/50	Box	150	Daylight	Soft White	5000	80	2550	25000	22.8	\$3.01	5.47"
<b>OMNI A23</b>														
51600 ▲	29	Med.	29OMNIA23/LED/SW/120-277V/30	Box	200	Warm White	Soft White	3000	80	3050	25000	22.8	\$3.49	6.30"
51710 ▲	29	Med.	29OMNIA23/LED/SW/120-277V/50	Box	200	Daylight	Soft White	5000	80	3050	25000	22.8	\$3.49	6.30"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## GLOBE LAMPS



G16.5  
SOFT WHITE/CLEAR

G25  
SOFT WHITE

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>G16.5 GLOBE</b>														
53128 ▲	7	Cand.	7G16.5/LED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.84	2.76"
45131 ▲	7	Cand.	7G16.5/LED/DIM/SW/CB/27 1CD	Card	60	Warm White	Soft White	2700	80	500	25000	22.8	\$0.84	2.75"
53129 ▲	7	Med.	7G16.5/LED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.84	2.91"
<b>G25 GLOBE</b>														
53011 ▲	6	Med.	6G25/LED/DIM/SW/30	Box	75	Warm White	Soft White	3000	80	590	25000	22.8	\$0.72	4.33"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



# REFLECTOR LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>MR11</b>														
35152 ▲	4	GU4	4MR11/LED/FL/GU4/30 1CD	Card	25	Warm White	White	3000	80	250	25000	22.8	\$0.48	1.69"
35153 ▲	4	GU10	4MR11/LED/DIM/FL/GU10/30 1CD	Card	25	Warm White	White	3000	80	250	25000	22.8	\$0.48	1.89"
<b>MR16</b>														
33638 ▲	4.5	GU5.3	4.5MR16/LED/DIM/FL/30	Hanging Box	35	Warm White	Clear	3000	80	360	25000	22.8	\$0.54	1.85"
33491 ▲	6.5	GU5.3	6.5MR16/LED/DIM/FL/30	Hanging Box	50	Warm White	Clear	3000	80	500	25000	22.8	\$0.78	1.85"
53032 ▲	6.5	GU10	6.5MR16/LED/DIM/FL/GU10/30	Box	50	Warm White	Frost	3000	80	500	25000	22.8	\$0.78	2.16"
<b>R14 REFLECTOR</b>														
45154 ▲	4	Inter.	4R14/LED/DIM/FL/IN/27 1CD	Card	25	Warm White	Soft White	2700	80	280	25000	22.8	\$0.48	2.55"
<b>R20 REFLECTORS</b>														
53050 ▲	6.5	Med.	6.5R20/LED/DIM/FL/27	Box	50	Warm White	Frost	2700	80	525	25000	22.8	\$0.78	3.93"
53161 ▲	6.5	Med.	6.5R20/LED/DIM/FL/30	Box	50	Warm White	Frost	3000	80	525	25000	22.8	\$0.78	3.93"
50110 ▲	6.5	Med.	6.5R20/LED/DIM/FL/40	Box	50	Cool White	Frost	4000	80	525	25000	22.8	\$0.78	3.93"
50120 ▲	6.5	Med.	6.5R20/LED/DIM/FL/50	Box	50	Daylight	Frost	5000	80	525	25000	22.8	\$0.78	3.93"
<b>R30 REFLECTORS</b>														
53000	8	Med.	8R30/LED/DIM/FL/27	Box	65	Warm White	Frost	2700	80	650	25000	22.8	\$0.96	5.16"
33159	8	GU24	8R30/LED/DIM/FL/GU24/27	Box	65	Warm White	Frost	2700	80	650	25000	22.8	\$0.96	4.96"
52200 ▲	9	Med.	9BR30/LED/DIM/FL/27	Box	65	Warm White	Frost	2700	80	750	25000	22.8	\$1.08	5.24"
35174 ▲	9	Med.	9BR30/LED/DIM/FL/27 12PK	Box (12)	65	Warm White	Frost	2700	80	750	25000	22.8	\$1.08	5.24"
52210 ▲	9	Med.	9BR30/LED/DIM/FL/30	Box	65	Warm White	Frost	3000	80	750	25000	22.8	\$1.08	5.24"
50081 ▲	9	Med.	9BR30/LED/DIM/FL/40	Box	65	Cool White	Frost	4000	80	750	25000	22.8	\$1.08	5.24"
45148 ▲	9	Med.	9BR30/LED/DIM/FL/50	Box	65	Daylight	Frost	5000	80	750	25000	22.8	\$1.08	5.24"
<b>R40 REFLECTORS</b>														
33163	16.5	Med.	16.5R40/LED/DIM/FL/27	Box	85	Warm White	Frost	2700	80	1200	25000	22.8	\$1.99	6.46"
53064	16.5	Med.	16.5R40/LED/DIM/FL/30	Box	85	Warm White	Frost	3000	80	1200	25000	22.8	\$1.99	6.46"
50140	16.5	Med.	16.5R40/LED/DIM/FL/50	Box	85	Daylight	Frost	5000	80	1200	25000	22.8	\$1.99	6.46"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

# REFLECTOR LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>PAR16 REFLECTOR</b>														
33067 ▲	6	Med.	6PAR16/LED/DIM/FL/30	Box	45	Warm White	Clear	3000	80	470	25000	22.8	\$0.72	3.50"
<b>PAR20 REFLECTOR</b>														
53012 ◆▲	7	Med.	7PAR20/LED/DIM/IndOutFL/30	Box	50	Warm White	Clear	3000	80	490	25000	22.8	\$0.84	3.50"
50000 ▲	7	Med.	7PAR20/LED/DIM/FL/40	Box	50	Cool White	Clear	4000	80	490	25000	22.8	\$0.84	3.50"
50010 ▲	7	Med.	7PAR20/LED/DIM/FL/50	Box	50	Daylight	Clear	5000	80	490	25000	22.8	\$0.84	3.50"
<b>PAR30 REFLECTOR</b>														
51800 ◆▲	10	Med.	10PAR30S/LED/DIM/IndOutFL/30	Box	75	Warm White	Clear	3000	80	840	25000	22.8	\$1.20	3.58"
50051 ◆▲	10	Med.	10PAR30S/LED/DIM/IndOutFL/50	Box	75	Daylight	Clear	5000	80	840	25000	22.8	\$1.20	3.58"
51450 ◆▲	10	Med.	10PAR30/LED/DIM/IndOutFL/30	Box	75	Warm White	Clear	3000	80	840	25000	22.8	\$1.20	4.57"
50020 ▲	10	Med.	10PAR30/LED/DIM/FL/40	Box	75	Cool White	Clear	4000	80	840	25000	22.8	\$1.20	4.57"
<b>PAR38 REFLECTOR</b>														
53110 ◆▲□	15	Med.	15PAR38/LED/DIM/IndOutFL/30	Box	90	Warm White	Clear	3000	80	1350	25000	22.8	\$1.81	5.32"
53114 ◆▲□	15	Med.	15PAR38/LED/DIM/IndOutFL/30 2PK	Box (2)	90	Warm White	Clear	3000	80	1350	25000	22.8	\$1.81	5.32"
50061 ◆▲	15	Med.	15PAR38/LED/DIM/IndOutFL/40	Box	90	Cool White	Clear	4000	80	1350	25000	22.8	\$1.81	5.32"
50071 ◆▲	15	Med.	15PAR38/LED/DIM/IndOutFL/50	Box	90	Daylight	Clear	5000	80	1350	25000	22.8	\$1.81	5.32"

◆ Wet Location Approved      ▲ Approved for use in totally enclosed fixtures      \*Based on 3 hrs./day      \*\*Based on 3 hrs./day 11¢/kWh  
 □ IP65 Rated



# INDOOR/OUTDOOR COLOR REFLECTOR LAMPS



COLOR PAR38

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>SPECIALTY - COLOR PAR38 REFLECTOR</b>														
33147 ▲	15	Med.	15PAR38/LED/FL/R	Box	100	—	Red	—	—	—	25000	22.8	\$1.81	5.32"
33149 ▲	15	Med.	15PAR38/LED/FL/G	Box	100	—	Green	—	—	—	25000	22.8	\$1.81	5.32"
33151 ▲	15	Med.	15PAR38/LED/FL/B	Box	100	—	Blue	—	—	—	25000	22.8	\$1.81	5.32"

▲ Approved for use in totally enclosed fixtures      \*Based on 3 hrs./day      \*\*Based on 3 hrs./day 11¢/kWh



BR30

## GROW LAMP

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>BR</b>													
51820	9	Med.	9BR30/LED/FL/GROW/G	Box	65	—	—	—	—	25000	22.8	\$1.08	5.12"

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## GENERAL PURPOSE SPECIALTY LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>C7</b>														
55110 ▲	0.5	Cand.	0.5C7/LED/CL/CB/27 2CD	Card (2)	4	Warm White	Clear	2700	80	20	15000	13.6	\$0.06	2.00"
55108 ▲	0.5	Cand.	0.5C7/LED/F/CB/27 2CD	Card (2)	4	Warm White	Frost	2700	80	20	15000	13.6	\$0.06	2.00"
55111 ▲	0.75	Cand.	0.75C7/LED/CL/CB/27 2CD	Card (2)	7	Warm White	Clear	2700	80	50	15000	13.6	\$0.09	2.00"
55109 ▲	0.75	Cand.	0.75C7/LED/F/CB/27 2CD	Card (2)	7	Warm White	Frost	2700	80	50	15000	13.6	\$0.09	2.00"
<b>S6</b>														
45117 ▲	0.6	Cand.	0.6S6/LED/CL/CB/27 1CD	Card	6	Warm White	Clear	2700	80	32	15000	13.6	\$0.07	1.77"
<b>S11</b>														
45113 ▲	1	Med.	1S11/LED/CL/27 1CD	Card	7.5	Warm White	Clear	2700	80	50	15000	13.6	\$0.12	1.99"
45112 ▲	1	Med.	1S11/LED/W/27 1CD	Card	7.5	Warm White	White	2700	80	40	15000	13.6	\$0.12	2.08"
45114 ▲	1.5	Inter.	1.5S11/LED/CL/IN/27 1CD	Card	10	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
<b>S14</b>														
55116 ▲	1.2	Med.	1.2S14/LED/CL/27 1CD	Card	15	Warm White	Clear	2700	80	120	15000	13.6	\$0.14	3.23"
55115 ▲	1.2	Med.	1.2S14/LED/F/27 1CD	Card	15	Warm White	Frost	2700	80	120	15000	13.6	\$0.14	3.23"
<b>T7</b>														
45118 ▲	1	Cand.	1T7/LED/CL/CB/27 1CD	Card	10	Warm White	Clear	2700	80	50	15000	13.6	\$0.12	2.09"
45119 ▲	1.5	Inter.	1.5T7/LED/CL/IN/27 1CD	Card	15	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
45120 ▲	1.5	D.C. Bay.	1.5T7/LED/CL/DC/27 1CD	Card	15	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
33199 ▲	8	Med.	8T7/LED/F/30 1CD	Card	60	Warm White	Frost	3000	80	800	15000	13.6	\$0.96	4.22"
05161 ▲	8	Med.	8T7/LED/DIM/F/30 1CD	Card	60	Warm White	Frost	3000	80	800	25000	22.8	\$0.96	4.22"
<b>UTILITY</b>														
03197 ▲	15	Med.	15DLR46E26/LED/F/27	Box	75	Warm White	Frost	2700	80	1200	25000	22.8	\$1.81	4.41"
03198 ▲	20	Med.	20DLR64E26/LED/F/27	Box	100	Warm White	Frost	2700	80	1800	25000	22.8	\$2.41	6.06"

▲ Approved for use in totally enclosed fixtures


\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



See individual product specification sheets for dimmer compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

# HALOGEN ALTERNATIVE SPECIALTY LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Volt	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
<b>JC</b>															
43184 ▲	1.5	G4	15G4/LED/F/301CD	12	Card	10	Warm White	Frost	3000	80	150	25000	22.8	\$0.18	1.46"
<b>JCD</b>															
33185 ▲	2.5	G9	25G9/LED/CL/301CD	120	Card	25	Warm White	Clear	3000	80	240	25000	22.8	\$0.30	2.05"
51641 ▲	5	G9	5G9/LED/DIM/CL/30	120	Box	40	Warm White	Clear	3000	80	500	25000	22.8	\$0.60	2.13"
<b>DOUBLE-ENDED LONG</b>															
33187 ▲	9	RSC	9R7S/LED/CL/271CD	120	Card	75	Warm White	Clear	2700	80	1000	25000	22.8	\$1.08	4.65"
<b>SINGLE-ENDED</b>															
51631 ▲	5	E11	5E11/LED/DIM/CL/30	120	Box	50	Warm White	Clear	3000	80	500	25000	22.8	\$0.60	2.24"

▲ Approved for use in totally enclosed fixtures

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



## PIN BASE LAMPS

Replacements for 13W, 18W, 32W, and 42W CFL pin-base lamps.



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. CFL Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)*	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	
<b>HORIZONTAL INSTALLATION</b>															
51470 ▲	9	G24Q GX24Q	9PL/H/LED/DIM/G24Q/30 Direct Install	Box	26	Warm White	White	3000	82	900	50000	45.6	\$1.08	5.20"	
51480 ▲	9	G24Q GX24Q	9PL/H/LED/DIM/G24Q/35 Direct Install	Box	26	Warm White	White	3500	82	950	50000	45.6	\$1.08	5.20"	
51490 ▲	9	G24Q GX24Q	9PL/H/LED/DIM/G24Q/40 Direct Install	Box	26	Cool White	White	4000	82	1000	50000	45.6	\$1.08	5.20"	
<b>VERTICAL INSTALLATION</b>															
51500 ▲	9	G24Q GX24Q	9PL/V/LED/DIM/G24Q/30 Direct Install	Box	26	Warm White	White	3000	82	950	50000	45.6	\$1.08	4.65"	
51510 ▲	9	G24Q GX24Q	9PL/V/LED/DIM/G24Q/35 Direct Install	Box	26	Warm White	White	3500	82	1000	50000	45.6	\$1.08	4.65"	
51520 ▲	9	G24Q GX24Q	9PL/V/LED/DIM/G24Q/40 Direct Install	Box	26	Cool White	White	4000	82	1050	50000	45.6	\$1.08	4.65"	

▲ Approved for use in totally enclosed fixtures

▾ Dimmable when used with a compatible dimming ballast.

\* Lumen output is based on ballast type.

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



## TWIN TUBE LONG PIN BASE LAMP



TWIN TUBE LONG

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. CFL Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
<b>TWIN TUBE LONG</b>												
52220	23	2G11	23PL/H/LED/2G11/40 Ballast Bypass	Box	40	Cool White	White	4000	82	2800	50000	22.48"



### 6" LED Surface Mount

Height: 1"  
Diameter: 6"



**63219**  
Brushed Nickel Finish  
with Frosted Lens



**63220 & 63224**  
Oil Rubbed Bronze Finish  
with Frosted Lens



**63221, 63225 & 63644**  
White Finish  
with Frosted Lens

### 7 3/8" LED Surface Mount

Height: 1.25"  
Diameter: 7.50"



**63226 & 63230**  
Chrome Finish  
with Frosted Lens



**63227 & 63231**  
Brushed Nickel Finish  
with Frosted Lens



**63228 & 63232**  
Oil Rubbed Bronze Finish  
with Frosted Lens



**63229, 63233 & 63645**  
White Finish  
with Frosted Lens

## LED SURFACE MOUNT FIXTURES

Item No.	Energy Used (Watts)	Equiv. Incand. Wattage	Light Appearance (Kelvin)	Brightness (Lumens)	CRI	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**
<b>6" LED SURFACE MOUNTS</b>								
<b>63219</b>	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
<b>63220</b>	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
<b>63224</b>	12	60	4000 (Cool White)	840	80	50000	45.6	\$1.45
<b>63221</b>	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
<b>63225</b>	12	60	4000 (Cool White)	840	80	50000	45.6	\$1.45
<b>63644</b>	12	60	5000 (Daylight)	840	80	50000	45.6	\$1.45
<b>7 3/8" LED SURFACE MOUNTS</b>								
<b>63226</b>	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
<b>63230</b>	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
<b>63227</b>	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
<b>63231</b>	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
<b>63228</b>	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
<b>63232</b>	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
<b>63229</b>	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
<b>63233</b>	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
<b>63645</b>	15	75	5000 (Daylight)	1050	80	50000	45.6	\$1.81

\* Integrated LED Light Source

\*\*Based on 3hrs./day \*\*Based on 3hrs./day 11¢/kWh



## SLIM RECESSED DOWNLIGHTS

All Slim Direct Wire Recessed LED Downlights are ETL Listed.

Item No.	Energy Used (Watts)	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
<b>ROUND SLIM STEP BAFFLE WITH COLOR TEMPERATURE SELECTION</b>														
24 52260 ♦♦	10	10R/4"/LED/DIM/SLIMBAFFLE/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	650	50000	45.6	\$1.20	1.42"	5.04"
24 52270 ♦♦	12	12R/6"/LED/DIM/SLIMBAFFLE/FL/27-50	Box	80	Multi 5	White	2700/3000/3500/4000/5000	90	900	50000	45.6	\$1.45	1.42"	7.17"
<b>ROUND SLIM WITH COLOR TEMPERATURE SELECTION</b>														
52011 ♦♦	10	10R/4"/LED/DIM/SLIM/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	80	650	50000	45.6	\$1.20	1.02"	5.04"
52050 ♦♦▲	11	11R/5"/LED/DIM/SLIM/FL/27-50	Box	75	Multi 5	White	2700/3000/3500/4000/5000	80	800	50000	45.6	\$1.32	1.02"	6.29"
52021 ♦♦	12	12R/6"/LED/DIM/SLIM/FL/27-50	Box	80	Multi 5	White	2700/3000/3500/4000/5000	80	950	50000	45.6	\$1.45	1.02"	7.17"
<b>ROUND SLIM</b>														
52160 ●	7	7R/3"/LED/DIM/WH/SLIM/FL/27	Box	40	Warm White	White	2700	80	450	50000	45.6	\$0.84	0.98"	3.35"
52180 ●	7	7R/3"/LED/DIM/WH/SLIM/FL/40	Box	40	Cool White	White	4000	80	450	50000	45.6	\$0.84	0.98"	3.35"
52190 ●	7	7R/3"/LED/DIM/WH/SLIM/FL/50	Box	40	Daylight	White	5000	80	450	50000	45.6	\$0.84	0.98"	3.35"
24 52171 ●♦♦	8	8R/3"/LED/DIM/WH/SLIM/FL/30	Box	40	Warm White	White	3000	90	500	50000	45.6	\$0.96	1.02"	3.78"
24 50951 ♦♦♦	10	10R/4"/LED/DIM/WH/SLIM/FL/27	Box	65	Warm White	White	2700	90	650	50000	45.6	\$1.20	1.02"	5.04"
24 50971 ♦♦♦	10	10R/4"/LED/DIM/WH/SLIM/FL/30	Box	65	Warm White	White	3000	90	650	50000	45.6	\$1.20	1.02"	5.04"
24 51030 ●	12	12R/6"/LED/DIM/WH/SLIM/FL/27	Box	60	Warm White	White	2700	90	900	50000	45.6	\$1.45	0.98"	6.72"
24 51071 ♦♦♦	12	12R/6"/LED/DIM/WH/SLIM/FL/30	Box	80	Warm White	White	3000	90	900	50000	45.6	\$1.45	1.02"	7.17"
24 51091 ♦♦♦	12	12R/6"/LED/DIM/WH/SLIM/FL/40	Box	80	Cool White	White	4000	90	900	50000	45.6	\$1.45	1.02"	7.17"
51111 ♦♦♦	12	12R/6"/LED/DIM/WH/SLIM/FL/50	Box	80	Daylight	White	5000	90	900	50000	45.6	\$1.45	1.02"	7.17"
24 51980 ●	18	18R/8"/LED/DIM/WH/SLIM/FL/120-277V/30	Box	100	Warm White	White	3000	90	1300	50000	45.6	\$2.17	0.98"	8.86"
24 51990 ●	18	18R/8"/LED/DIM/WH/SLIM/FL/120-277V/40	Box	100	Cool White	White	4000	90	1300	50000	45.6	\$2.17	0.98"	8.86"
52000 ●	18	18R/8"/LED/DIM/WH/SLIM/FL/120-277V/50	Box	100	Daylight	White	5000	90	1300	50000	45.6	\$2.17	0.98"	8.86"

● Compatible with item #509506931      ♦ Wet Location Approved

\*Based on 3 hrs./day    \*\*Based on 3 hrs./day 11¢/kWh

▲ Compatible with item #520506913      ♦♦ IP40 Rated

♦ Compatible with Special Order accessory item #509516931

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

## SLIM RECESSED DOWNLIGHT ACCESSORIES



Item No.	Description	Height	Width	Depth
509506931	10 ft. Extension Cord for Slim Recessed Downlights	-	-	-
509516931 *	10 ft. Extension Cord for Slim Recessed Downlights	-	-	-
509506913	Bracket for 4 in. Slim Recessed Downlights	0.03"	26.00"	6.25"
520506913	Bracket for 5 in. Slim Recessed Downlights	0.03"	26.00"	8.35"
510306913	Bracket for 6 in. Slim Recessed Downlights	0.03"	26.00"	8.38"

\* SPECIAL ORDER ITEM -

Visit [www.westinghouselighting.com](http://www.westinghouselighting.com) for accessory compatibility.

CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION



## RECESSED DOWNLIGHTS

All Recessed LED Downlight Kits are UL or ETL Classified.

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	Brightness CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
<b>STEP BAFFLE WITH COLOR TEMPERATURE SELECTION</b>															
51401 ♦	6.5	Med.	6.5R/4"/LED/DIM/FL/27-50	Retail Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	550	50000	45.6	0.78	2.48"	5.27"
51411 ♦	11	Med.	11R/5-6"/LED/DIM/FL/27-50	Retail Box	80	Multi 5	White	2700/3000/3500/4000/5000	90	1000	50000	45.6	1.32	2.87"	7.48"
<b>STEP BAFFLE</b>															
51047 ♦	10	Med.	10R/4"/LED/DIM/FL/30	Retail Box	65	Warm White	Frost	3000	90	670	50000	45.6	\$1.20	2.88"	5.52"
51048 ♦	11	Med.	11R/5-6"/LED/DIM/FL/30	Retail Box	65	Warm White	Frost	3000	90	750	50000	45.6	\$1.32	2.13"	7.48"
50550 ♦	11	Med.	11R/5-6"/LED/DIM/FL/40	Retail Box	65	Cool White	Frost	4000	90	750	50000	45.6	\$1.32	2.13"	7.48"
50560 ♦	11	Med.	11R/5-6"/LED/DIM/FL/50	Retail Box	65	Daylight	Frost	5000	90	750	50000	45.6	\$1.32	2.13"	7.48"
<b>SMOOTH BAFFLE</b>															
41043	8	Med.	8R/4"/LED/DIM/FL/27	Contractor Box	65	Warm White	Frost	2700	80	650	50000	45.6	\$0.96	3.50"	5.04"
41041	8	Med.	8R/4"/LED/DIM/FL/30	Contractor Box	65	Warm White	Frost	3000	80	650	50000	45.6	\$0.96	3.50"	5.04"
41040	14	Med.	14R/5"/LED/DIM/FL/27	Contractor Box	80	Warm White	Frost	2700	80	1000	50000	45.6	\$1.69	3.54"	6.30"
41044	14	Med.	14R/5"/LED/DIM/FL/30	Contractor Box	80	Warm White	Frost	3000	80	1000	50000	45.6	\$1.69	3.54"	6.30"
41045	14	Med.	14R/6"/LED/DIM/FL/27	Contractor Box	80	Warm White	Frost	2700	80	1000	50000	45.6	\$1.69	3.40"	7.24"
41046	14	Med.	14R/6"/LED/DIM/FL/30	Contractor Box	80	Warm White	Frost	3000	80	1000	50000	45.6	\$1.69	3.40"	7.24"
<b>SQUARE STEP BAFFLE</b>															
31053 ♦	10	Med.	10R/4"/LED/DIM/SQ/FL/30	Retail Box	60	Warm White	Frost	3000	90	650	50000	45.6	\$1.20	2.06"	5.13"
31055 ♦	15	Med.	15R/6"/LED/DIM/SQ/FL/30	Retail Box	100	Warm White	Frost	3000	90	1100	50000	45.6	\$1.81	3.00"	7.50"
31056 ♦	15	Med.	15R/6"/LED/DIM/SQ/FL/40	Retail Box	100	Cool White	Frost	4000	90	1100	50000	45.6	\$1.81	3.00"	7.50"
<b>SLOPED STEP BAFFLE</b>															
50820	10	Med.	10R/4"/LED/DIM/SLP/FL/27	Contractor Box	65	Warm White	Frost	2700	90	650	35000	31.9	\$1.20	3.35"	5.15"
50830	10	Med.	10R/4"/LED/DIM/SLP/FL/30	Contractor Box	65	Warm White	Frost	3000	90	650	35000	31.9	\$1.20	3.35"	5.15"
50840	13	Med.	13R/6"/LED/DIM/SLP/FL/27	Contractor Box	80	Warm White	Frost	2700	90	900	35000	31.9	\$1.57	3.50"	7.28"
50850	13	Med.	13R/6"/LED/DIM/SLP/FL/30	Contractor Box	80	Warm White	Frost	3000	90	900	35000	31.9	\$1.57	3.50"	7.28"

♦ Wet Location Approved

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.



## GIMBAL RECESSED DOWNLIGHTS

All Gimbal Recessed LED Downlights are ETL Listed.



Item No.	Energy Used (Watts)	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
52120	7	7R/3"/LED/DIM/WH/GIMBAL/27	Box	65	Warm White	White	2700	80	610	50000	45.6	\$0.84	1.83"	3.37"
52130	7	7R/3"/LED/DIM/WH/GIMBAL/30	Box	65	Warm White	White	3000	80	610	50000	45.6	\$0.84	1.83"	3.37"
52140 †	12	12R/4"/LED/DIM/WH/GIMBAL/27	Box	80	Warm White	White	2700	90	850	50000	45.6	\$1.45	2.24"	5.04"
52150 †	12	12R/4"/LED/DIM/WH/GIMBAL/30	Box	80	Warm White	White	3000	90	850	50000	45.6	\$1.45	2.24"	5.04"

† Compatible with Bracket for 4 in. Slim Recessed Downlights sold separately (Item# 509506913) \*Based on 3 hrs./day \*\*Based on 3 hrs./day 11¢/kWh  
All gimbal recessed downlights are compatible with 10 ft. Extension Cord for Slim Recessed Downlights sold separately (Item# 509506931)

Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.



## UNIVERSAL HIGH LUMEN LAMP

This LED Lamp is 120-277V.



52230

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
52230 ▲	70	Extended Mogul	70UHL/LED/EX39/50	Box	250	Daylight	White	5000	80	10500	50000	11.57"

▲ Approved for use in totally enclosed fixtures.

See installation instructions for minimum compartment dimensions.

## UNIVERSAL HIGH LUMEN LAMP ACCESSORIES



522306914



522306916



522306917



522306930

Item No.	Description	Height	Width/ Depth	Length
522306914*	Microwave Motion Sensor for Universal High Lumen LED 52230 White Finish	1.69"	2.06"	—
522306916*	Infrared Motion Sensor for Universal High Lumen LED 52230 White Finish	1.69"	2.06"	—
522306917*	Photocell Sensor for Universal High Lumen LED 52230 White Finish	1.69"	2.06"	—
522306930*	Remote Accessory Cable for Universal High Lumen LED 52230 White Finish	—	—	47.24"

\* SPECIAL ORDER ITEM  
CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION





## LOW BAY & HIGH BAY LAMPS

These LED Lamps are 120-277V.



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
51720 ▲	80	Extended Mogul	80LB/LED/HL/EX39/50	Box	250	Daylight	White	5000	80	9700	50000	10.12"
50570 ▲	115	Mogul	115HB/LED/HL/E39/50	Box	400	Daylight	Clear	5000	80	15500	50000	8.11"
51730 ▲	130	Extended Mogul	130HB/LED/HL/EX39/50	Box	400	Daylight	White	5000	80	16100	50000	12.40"

▲ Approved for use in totally enclosed fixtures.




## HIGH LUMEN LAMPS

All High Lumen LED Lamps are 120-277V.



Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. Incand. Wattage	Equiv. CFL Wattage	Equiv. HID Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
35181 ▲	16	Med.	16T19/LED/HL/50	Box	125	32	70	Daylight	Clear	5000	80	2400	50000	6.57"
35165 ▲	22	Med.	22T19/LED/HL/50	Box	150	55	100	Daylight	Clear	5000	80	2860	50000	7.09"
35162 ▲	36	Med.	36T30/LED/HL/50	Box	200	65	150	Daylight	Clear	5000	80	4680	50000	8.27"
35163 ▲	45	Med.	45T30/LED/HL/50	Box	300	85	175	Daylight	Clear	5000	80	5850	50000	9.25"
35164 ▲▲	45	Mogul	45T30/LED/HL/E39/50	Box	300	85	175	Daylight	Clear	5000	80	5850	50000	9.25"
35166 ▲▲	54	Mogul	54T30/LED/HL/E39/50	Box	400	105	250	Daylight	Clear	5000	80	7020	50000	10.24"
51540 ▲▲	65	Mogul	65T30/LED/HL/E39/50	Box	450	125	320	Daylight	Clear	5000	80	8450	50000	12.20"
45167 ▲▲	100	Mogul	100T38/LED/HL/E39/50	Box	750	150	400	Daylight	Clear	5000	80	15000	50000	11.10"
35180 ▲▲	120	Mogul	120T38/LED/HL/E39/50	Box	1000	250	800	Daylight	Clear	5000	80	18000	50000	13.46"

◆ DLC qualified

▲ Approved for use in totally enclosed fixtures.

See installation instructions for minimum compartment dimensions.



## ED28 FILAMENT HIGH LUMEN

This LED Lamp is 120-277V.



52250

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
52250 ▲◆	32	Mogul	32ED28/FilamentLED/CL/120-277V/E39/50	Box	175	Daylight	Clear	5000	80	5000	15000	8.86"

▲ Approved for use in totally enclosed fixtures.

◆ Wet Location Approved



See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).



## SHOEBOX LAMPS

All Shoebox LED Lamps are 100-277V.



51190



51180

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
51190 ▲	80	Mogul/Extended Mogul	80SB/LED/EX39/50	Box	250	Daylight	Clear	5000	80	9200	50000	8.7"
51180 ▲	110	Mogul/Extended Mogul	110SB/LED/EX39/50	Box	400	Daylight	Clear	5000	80	12650	50000	11.06"

▲ Approved for use in totally enclosed fixtures.

See installation instructions for minimum compartment dimensions.



## U-BENT LINEAR LAMPS

All Linear LED Lamps are UL Classified and NSF Certified.



T8 U-BENT

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Lamp Type Replacement	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
<b>T8 U-Bent (DesignLights Consortium® qualified product)</b>												
50300 ▲	18	Med. BiPin	LED 18T8/UB6/40 Ballast Bypass	Box	T8 & T12 U	Cool White	Frost	4000	82	2200	50000	22.84"
50380 ▲	18	Med. BiPin	LED 18T8/UB6/50 Ballast Bypass	Box	T8 & T12 U	Daylight	Frost	5000	82	2200	50000	22.84"


▲ Approved for use in totally enclosed fixtures.

Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.



## LINEAR LAMPS

All Linear LED Lamps are UL Classified and NSF Certified.

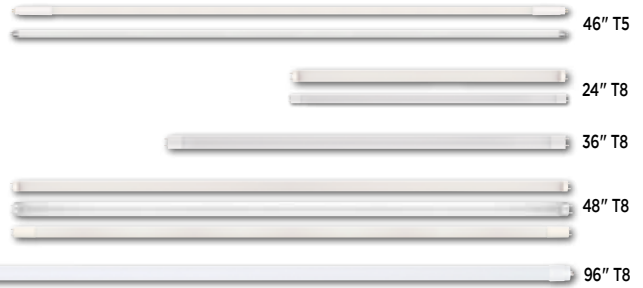

Item No.	Energy Used (Watts)	Lamp Base	Domestic Code	Package Type	Lamp Type Replacement	Color Designation	Finish	Light Appearance (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
<b>T5 46 inch (DesignLights Consortium® qualified product)</b>												
50801	24	Mini BiPin	LED 24T5/46"/40 DE Ballast Bypass	Sleeve	T5	Cool White	White	4000	80	3500	50000	46"
51531	24	Mini BiPin	LED 24T5/46"/50 DE Ballast Bypass	Sleeve	T5	Daylight	White	5000	80	3500	50000	46"
43788	25	Mini BiPin	LED 25T5/46"/40 Direct Install	Sleeve	T5	Cool White	Frost	4000	82	3500	50000	46"
43789	25	Mini BiPin	LED 25T5/46"/50 Direct Install	Sleeve	T5	Daylight	Frost	5000	82	3500	50000	46"
<b>T8 24 inch (DesignLights Consortium® qualified product)</b>												
50251	8	Med. BiPin	LED 8T8/24"/DIM/40 Direct Install	Sleeve	T8	Cool White	Frost	4000	82	1250	50000	24"
50260	9	Med. BiPin	LED 9T8/24"/40 Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	82	1150	50000	24"
50440	9	Med. BiPin	LED 9T8/24"/50 Ballast Bypass	Sleeve	T8 & T12	Daylight	Frost	5000	82	1150	50000	24"
<b>T8 36 inch</b>												
50280	12	Med. BiPin	LED 12T8/36"/40 Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	82	1450	50000	36"
<b>T8 48 inch (DesignLights Consortium® qualified product)</b>												
53739	11	Med. BiPin	LED 11T8/48"/DIM/40 Direct Install	Sleeve	T8	Cool White	Frost	4000	82	1800	50000	48"
53852	11	Med. BiPin	LED 11T8/48"/DIM/50 Direct Install	Sleeve	T8	Daylight	Frost	5000	82	1800	50000	48"
52310	14	Med. BiPin	LED 14T8/48"/DIM/35 Direct Install	Sleeve	T8	Cool White	Frost	3500	82	2200	50000	48"
52320	14	Med. BiPin	LED 14T8/48"/DIM/40 Direct Install	Sleeve	T8	Cool White	Frost	4000	82	2200	50000	48"
52330	14	Med. BiPin	LED 14T8/48"/DIM/50 Direct Install	Sleeve	T8	Daylight	Frost	5000	82	2200	50000	48"
<b>T8 48 inch Single-Ended/Double-Ended Powered (DesignLights Consortium® qualified product)</b>												
51551	14	Med. BiPin	LED 14T8/48"/35 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	3500	83	1700	50000	48"
51561	14	Med. BiPin	LED 14T8/48"/40 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	83	1800	50000	48"
51571	14	Med. BiPin	LED 14T8/48"/50 SE/DE Ballast Bypass	Sleeve	T8 & T12	Daylight	Frost	5000	83	1800	50000	48"
51421	17	Med. BiPin	LED 17T8/48"/35 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	3500	83	2100	50000	48"
51431	17	Med. BiPin	LED 17T8/48"/40 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	83	2200	50000	48"
51441	17	Med. BiPin	LED 17T8/48"/50 SE/DE Ballast Bypass	Sleeve	T8 & T12	Daylight	Frost	5000	83	2200	50000	48"
<b>T8 96 inch (DesignLights Consortium® qualified product)</b>												
04051	43	Single Pin	LED 43T8/96"/40 Ballast Bypass	Bulk	T8 & T12	Cool White	Frost	4000	82	5500	50000	96"
04052	43	Single Pin	LED 43T8/96"/50 Ballast Bypass	Bulk	T8 & T12	Daylight	Frost	5000	82	5500	50000	96"

▲ Approved for use in totally enclosed fixtures.

◆ DLC qualified

▮ Dimmable when used with a compatible dimming ballast.

■ Replace F54T5HO linear fluorescent lamps.

Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.



See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

# YouTube Videos



## Visit Our YouTube Channel for LED Educational Videos

<https://www.youtube.com/c/Westinghouselighting>

In just a few minutes, learn more about these LEDs by watching our brief videos.



### Long Life LED vs Incandescent Informational Video

Learn more about the benefits of long-lasting LED technology.



### Light Bulb Color Temperature Informational Video

Discover how choosing the right color temperature can alter the ambiance of a room.



### HID to High Lumen LED Conversion Video

This informative tutorial includes the conversion of a parking lot light from a metal halide HID to an energy-efficient high lumen LED lamp.



### TLED General Informational Video

General information about Westinghouse TLED linear direct install and ballast bypass lamps.



### TLED Single Ended Retrofit Informational Video

Overview of our single-ended TLED lamps.



### TLED Double Ended Retrofit Informational Video

Overview of our double-ended TLED lamps.



### 4 Ft. T8 LED Direct Install Installation Video

Westinghouse T8 Direct Install LEDs can easily replace traditional fluorescent T8 lamps.



### 4 Ft. T8 LED Ballast Bypass Installation Video

T8 Ballast Bypass LEDs can replace traditional fluorescent T8 lamps but installation requires knowledge of fluorescent lighting fixtures and electrical systems.



### 8 Ft. TLED FAQs Video

We answer some of your most frequently asked questions about our 8 Ft. TLEDs.



### 8 Ft. T8 LED Ballast Bypass Installation Video

General overview of a ballast bypass installation for use with Westinghouse ballast bypass 8 ft T8 LEDs.



### Universal TLED Informational Video

Short overview of Linear TLED Universal lamps that operate on both single-ended and double-ended wiring.



### Round Slim Recessed LED Downlight Installation Video

Our slim recessed LEDs are even easier to install with the help of this video.



### Square Recessed LED Downlight Installation Video


Make installation of our standard LED downlights even easier with the help of this video.



### Round Recessed LED Downlight Installation Video

Make installation of our standard LED downlights even easier with the help of this video.

©2021 Google Inc. All rights reserved. YouTube is a trademark of Google Inc.

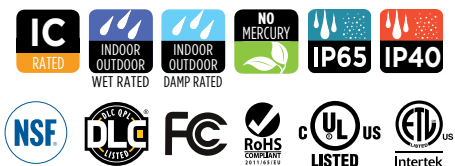

Call 1-800-999-2226 or visit [www.westinghouselighting.com](http://www.westinghouselighting.com).

®, WESTINGHOUSE, and INNOVATION YOU CAN BE SURE OF are trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.

Contact your Westinghouse Sales Representative for more information.