




71784B - 2X4 LED TROFFER

35/4/5K 120-277V 20/25/30W

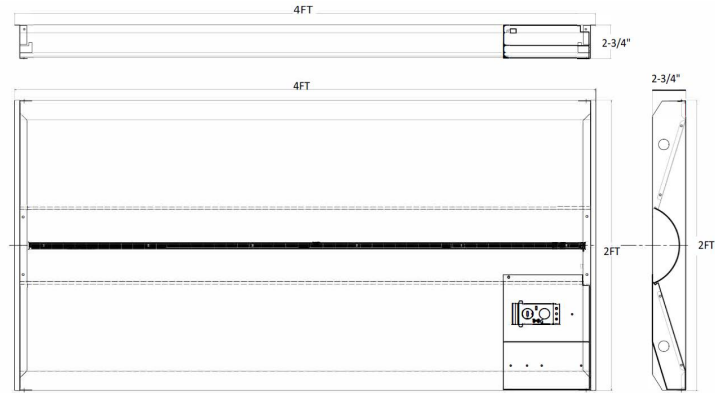


FEATURES:

- Replacement for office, hallway, conference room
- 0-10V Dimmable
- IP20 Dry Location Rated
- Operating Temperature: -4°F to 113°F
- Color Tunable: 5000K, 4000K & 3500K
- Wattage Tunable: 34W, 38W, 45W
- Heavy Gauge Steel Housing
- Frosted Lens
- Superior Architectural White Powder Coat Finish
- cULus, DLC listed
- 5 Year Warranty
- DLC PRODUCT ID#: P55KZB3I


Part#	CCT	Lumens	Voltage	Light Pattern	Dimming	Lumens/Watt
71784B	5000	5,243	120-277V	120°	0-10/PWM	138
	4000	5,113				134
	3500	5,059				133

PHOTOMETRY

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

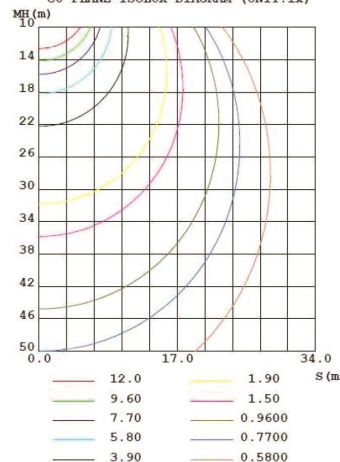



71784B - 2X4 LED TROFFER

35/4/5K 120-277V 20/25/30W

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .24A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 20%

Product Parameters:

34/38/45 Watts

Lumens: 5793

Efficacy: 135 Lumens Per Watt

50,000+ L70 Life Span

CCT: 3.5K/4K/5K

Chromaticity Measurements:

Beam Angle: 120°

CRI: >80

R9: -11

Component Specifications:

LED: SMD2835

Driver Output Volts: 40V

Driver Output Amps: 850mA

Dimming:

0-10V / PMW

Operating Temperature:

Minimum Starting -4°F - 113°F

Construction:

Housing: Steel

Powder Coated

IP Rating: IP20 Dry Location Rated

Lens Material: PC

Mounting: Ceiling Mount

Listings: cULus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).