



RETROFIT DOWNLIGHTS - 4" & 6"

COLOR SELECTABLE, BAFFLE & SMOOTH

72761B, 72762B, 72763B, 72764B



4 INCH



6 INCH



FEATURES:

- 5 CCT Color Selectable
- Easy Clip-in to existing can housing
- Baffle or Smooth Finish Option
- Emits evenly - no halo or shadows
- cETLus, Energy Star Listed
- Suitable for damp locations
- Damp-location rated, ideal for residential housings, hotels, corridors, home decoration, shopping malls, schools
- 50,000+ Hour LED Life Expectancy
- Title 24/JA8 Compliant for High Efficacy LED Lighting in California

h° ku ·	uk@ ·	o@-	‡ ° uu° 8-	GyU -Vo	##u'	† \Qu° 8- ·	k-hσ #-o' @#° V) -o#-Vu	#k@
72761B	BAFFLE	4"	10W	752	2700/3000/ 3500/4000/ 5000K	120V	75W	90
72762B	BAFFLE	6"	15W	1158	2700/3000/ 3500/4000/ 5000K	120V	100W	90
72763B	SMOOTH	4"	10W	752	2700/3000/ 3500/4000/ 5000K	120V	75W	90
72764B	SMOOTH	6"	15W	1158	2700/3000/ 3500/4000/ 5000K	120V	100W	90



RETROFIT DOWNLIGHTS - 4" & 6"

COLOR SELECTABLE, BAFFLE & SMOOTH

72761B, 72762B, 72763B, 72764B

TECHNICAL SPECIFICATIONS:

VOLTAGE: 120V

POWER FREQUENCY: 60 Hz

POWER FACTOR: > 0.9

5 CCT: 2700K/3000K/3500K/4000K/5000K

CRI: 90

BEAM ANGLE: 100 Degrees

LIFESPAN: >50,000 Hours

OPERATING TEMP: Minimum Starting -4° - 113° F

DIMMABLE: Triac dimming

RATING: Suitable for wet locations - IP43

WARRANTY:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

CONSTRUCTION:

HOUSING: PC driver housing and Aluminum reflector with architectural white finish

IP RATING: IP43 Wet Indoor Location Rated

LENS MATERIAL: Adjustable Frosted Polycarbonate Lens

MOUNTING: Retrofit

LISTINGS: cETLus, Energy Star, Title 24/JA8 Compliant

4 INCH:

CARTON QTY: 60

N.W. : 9.0 KGS

G.W. : 11.3 KGS

CBM : 0.093

6 INCH:

CARTON QTY: 24



N.W. : 5.28 KGS

G.W. : 7.0 KGS

CBM : 0.091

SIZE & DIMENSIONS:

4 INCH

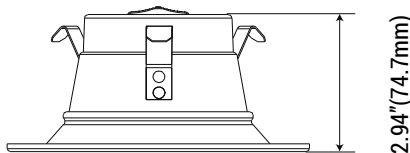

6 INCH

