

MINI-PANELUME® - Series MRP-4RD

4" Round LED Slim Profile IC Switchable Panel Light

Project:			
Туре:	Prepared By:	Date:	
Notes:			

SPECIFICATIONS

CONSTRUCTION: Decorative white flange in durable airtight aluminum body, under 1/2" thick. Steel driver junction box with snap cover rated for Type IC applications. Quick connect terminals for fast wiring.

OPTICS: Frosted etched white polycarbonate diffuser with 120° spread.

ELECTRICAL: Long life LED, rated for 50,000 hours with high efficiency triac dimming driver, 120V, 50/60Hz operation. Dimming can be accomplished with a LED compatible wall dimmer (Lutron C-L or equal). Total consumption 9 watts.


LED MODULE: LED array. 9 watts/550 lumens. 90CRI. Field selectable color temperature of 2700°K, 3000°K, 3500°K, 4000°K and 5000°K.

MOUNTING: Easy recess installation with the integral heavy duty springs. Includes 15" cable from driver to fixture. Pre-mounting plate and longer cord length available, see OPTIONS.


FINISH: White.

CERTIFICATION: The MINI-PANELUME® Series MRP-4RD luminaire is ETL listed for damp location. ADA compliant when mounted in the wall.

WARRANTY: Five (5) year warranty.

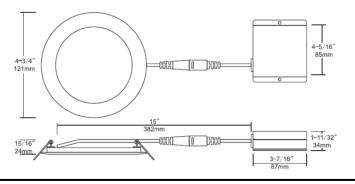





Accessories




FLEX-10

10" Flexible connector, for use with Slim LED fixtures.



4-1/4" Round pre-mounting plate for Slim LED round fixtures.

ORDERING INFORMATION



2700°K, 3000°K, 3500°K, 4000°K and 5000°K

(Consult factory for other options or special requests)

MP4 41/4" round pre-mounted plate with adjustable mounting bars

T Tandem

ARA Buy America Compliant







2021-11-04-MRP-4RD-LED