



LL3G-HO

3" Eyeball Round Recessed Gimbal LED High Output 11W



Project: _____

Location: _____

Model #: _____ Qty: _____

Notes: _____

DESCRIPTION

3" Round Eyeball Recessed Gimbal LED
 With Integral Driver In Connection Box
 Gimbal Yet Air-Tight Without Housing Needed
 2nd generation **High Output** of our original patented best seller


FEATURES & BENEFITS

3" Deep - Install Where Ceiling Space Is Limited
 Type IC Rated - No Housing Required
 Air-Tight & Wet Location rated
5CCT user selectable 2700-3000-3500-4000-5000K
 or **Dim to Warm** 3000K to 1800K options
 CRI 90+ for True Color Rendering
 Driver Inside Connection Box - No Junction Box Needed

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening
 With Attached Spring Clips
 Ceiling Clearance Required for driver to fit: 3 1/2"

DIMENSIONS: ID 2 1/2" OD 3 1/4" Cut Out 2 3/4" to 3"

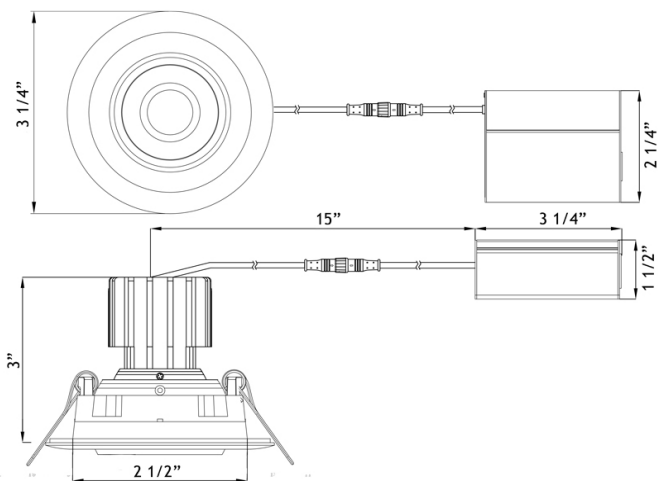

120V TRIAC Dimmable
 Driver Included

Optional 120V-347V
 Driver 0-10V Dimmable

Order Separately as
[model # LLL-LD1025T3](#)



ORDERING GUIDE

- | | |
|------------------|---|
| LL3G-5CCT-HO-WH | 5CCT White Trim |
| LL3G-5CCT-HO-BK | 5CCT Black Trim |
| LL3G-5CCT-HO-BN | 5CCT Brushed Nickel Trim |
| LL3G-3018K-HO-WH | Dim to Warm White Trim |
| LL3G-3018K-HO-BK | Dim to Warm Black Trim |
| LL3G-3018K-HO-BN | Dim to Warm Brushed Nickel Trim |



SPECIFICATION	
Applications	Sloped Ceilings up to 20°, General Lighting
Power	11 W
Color Temperature	5CCT: 2700 3000 3500 4000 5000 DTW 30-18K
Light Output	920 990 1060 1080 1090 780
Halogen Equivalent	90 W
Beam Angle	38° Beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White



Black



Brushed Nickel

ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed
[6ft - model # EXC6](#)
[20ft - model # EXC20](#)



[Flat Rough-In Plates - model # RIP3](#)



[Flanged Plate with Hanger Bars model # FRP3](#)



[Goof Ring OD 4 1/2" White # GR3 Black # GR3-BK](#)

COMPLIANCE



Type IC
Air-Tight
Wet Location

Lotus LED Lights USA
 250 H Street # 301, Blaine WA 98230 tel 360-200-5500
 Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDLights.com
 mailing addresses
 warehouses

Lotus LED Lights CANADA
 702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090
 Delta BC & Mississauga ON