



**Type IC, Air-Tight, Wet & Plenum**

**DESCRIPTION**

4" Round Recessed LED With Integral Driver In Connection Box  
Commercial Grade Quality With Architectural Design


**FEATURES & BENEFITS**

2" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
CRI 90+ for True Color Rendering  
Fast & Easy To Install - Save On Labor  
Driver Inside Connection Box - No Junction Box Needed  
Armored Cable & Metal Connectors - Open Plenum Rated

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2"

**DIMENSIONS:** ID 4" OD 5" Cut Out 4" to 4 1/4"

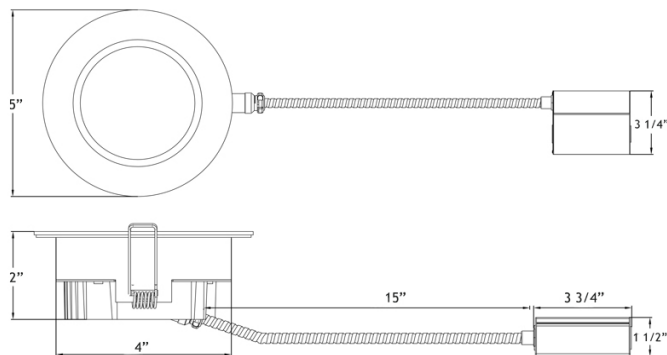

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as [model # LLL-LD1535TR](#)

**ORDERING GUIDE** Example: **LL4RR - 30K - WH**

	CCT	Trim Finish	
<b>LL4RR</b>	<b>- xxK</b>	<b>- xx</b>	
2700K	<b>27K</b>	<b>WH</b>	<a href="#">White</a>
3000K	<b>30K</b>	<b>BK</b>	<a href="#">Black</a>
4000K	<b>40K</b>		
DTW 30K-18K	<b>3018K</b>	Dim to Warm 3000K to 1800K	

**LL4RR**

**4" Round Regressed 2nd Gen Plenum LED 14.5W**

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

**SPECIFICATION**

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	14.5 W
Color Temperature (K)	2700   3000   4000   Dim to Warm 3000-1800K
Light Output (lm)	950   1000   1020   850
Halogen Equivalent	90 W
Beam Angle	90°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW)
Warranty	10 Year Residential / 5 Year Commercial

**AVAILABLE TRIMS**



White



Black

**ACCESSORIES**

Sold Separately



Armored Low Voltage Extension FT6 / CMP rated [10ft model # MEC10](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Flat Rough-In Plates model # RIP4](#)



[Flanged Plate with Hanger Bars model # FRP4](#)



[Goof Ring OD 5 3/4" model # GR4](#)

**COMPLIANCE**



**Type IC  
Air-Tight  
Open Plenum**

**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

**Lotus LED Lights CANADA**

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090  
Delta BC & Mississauga ON